


World's first MDDI-compliant LCD controller optimized for cell phones

February 13 2006

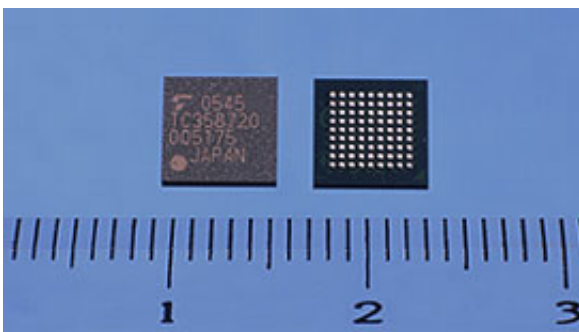

Toshiba Corporation announced the introduction of the world's first MDDI-compliant LCD controller optimized for cell phones equipped with high-resolution VGA LCD displays. Dubbed the MDDI LCD Bridge and designated TC358720XBG, the highly integrated, single-chip device is well suited for the new generation of advanced multimedia cell phones with MDDI interfaces, including 3G cellular handsets.

It has a high-speed serial digital packet host interface that supports throughputs of up to 400Mbps by using two low-voltage differential signal pairs. Toshiba will start sample shipments in April 2006. The company will display the device at the 2006 3GSM World Congress being held in Barcelona, Spain from February 13-16, 2006.

Toshiba's industry leading development of the MDDI LCD Bridge demonstrates the company's commitment to customers building the next generation of high-resolution, dual-LCD-panel cell phones with MDDI interface requirements. It supports two color LCD panels from a single controller, uses Toshiba's patented "magic square algorithm" technology to achieve a 16-million color display, and employs embedded DRAM to enable a low-power solution and mitigate the load on the baseband.

The MDDI LCD Bridge takes cell phone display resolution to the level of high-definition with support for VGA and W-QVGA LCDs. It optimizes low-power data transfers within cell phones, including video data transfers, through direct connection to the MDDI interface of QUALCOMM's Mobile Station Modem™ (MSMTM) baseband LSI. Its design also integrates 8-megabits of embedded DRAM to improve color image quality.

Equipped with an RGB interface plus an MPU interface, the device can control both a primary panel and a secondary panel. The image data needed to display images on two panels is stored in the embedded DRAM and only the updated parts of the display data need to be transferred from the baseband. When displaying still images, data need not be transferred from the baseband and this advance reduces the power consumption of the entire cell phone. The moving-image display function is supported on both the primary and secondary panels, and provides a mechanism for transferring image data to match the LCD display refresh timing. With the primary panel, it is possible to display VGA-size moving images and update only the locations displaying QVGA-size moving images, such as terrestrial digital broadcasts. This simplifies and reduces power consumption from baseband processing.

With the Toshiba "magic square algorithm", an RGB666 18-bit LCD panel can produce a display equivalent to that of an RGB888 24-bit LCD panel with up to 16-million colors. In addition, the algorithm enables

display of 8-bit gray scale images even if the LCD panel only has a 6-bit gray scale capacity. The chip has independent 8-bit lookup table format gamma correction circuits for each color. The lookup table format converts 8-bit input into 8-bit output. This function permits fine adjustments to the brightness, even in LCD panels with a limited range of tones.

Citation: World's first MDDI-compliant LCD controller optimized for cell phones (2006, February 13) retrieved 27 March 2023 from <https://phys.org/news/2006-02-world-mddi-compliant-lcd-optimized-cell.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.