


Henry Moore sculpture could be re-erected thanks to 21st century science

May 13 2008

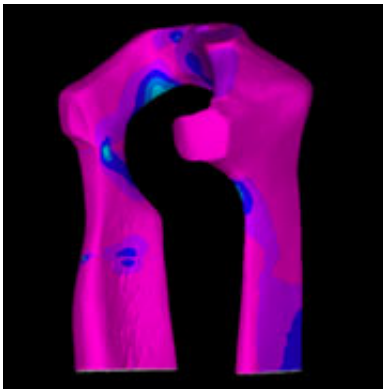

The blue and turquoise region in this Arch computer model show areas of high stress

A dismantled Henry Moore sculpture could be re-erected in Kensington Gardens, London, thanks to the latest rock engineering techniques, says a team of experts today.

The Arch, a sculpture dismantled 12 years ago due to safety concerns, could be re-erected at its original site on the banks of the Serpentine Lake following a project exploring the use of rock engineering techniques for cultural heritage conservation.

Engineers at Imperial College London, in collaboration with the International Drawing Institute, Glasgow School of Art, and Tate, carried out a detailed analysis of the Arch to see whether engineering computer

simulation and analysis techniques could be used to understand and preserve complex artefacts which experience structural problems.

The Arch, a six metre tall sculpture modelled on sheep collar bones joined together, was created in 1980 by Henry Moore and was dismantled into its seven component pieces in 1996 because of structural instabilities which caused it to be unsafe.

In order to allow the sculpture to be preserved and resurrected, the team needed to find out why it was structurally unsound. By testing rock samples and using laser scanning technologies which examined the large dismantled stone blocks, they gathered data which was used to generate 3D computer simulations of the sculpture for analysis.

By modelling how the structural stresses exerted pressures on the Arch, researchers found that its unusual shape, the poor location of the structural joints which held the blocks together, and the use of brittle travertine stone all contributed to its unsteadiness.

Using this information, the team believes that it has devised a new method to allow the sculpture to be held together without compromising its structure. This includes attaching the rock legs and top section together with fibreglass bolts and dowels and placing the structure on a base of specially reinforced concrete.

Dr John Harrison from Imperial College London's Department of Earth Science and Engineering said:

“Rock engineering techniques are usually used for stabilisation of tunnels and rock slopes, but the basic concepts of understanding how rock behaves when it is subjected to loads are immediately applicable to stone sculptures. We can now apply this knowledge to preserving some of the nation's most important and historic artworks.”

Dr Angela Geary from the International Drawing Research Institute, The Glasgow School of Art, added:

“We were delighted when the Henry Moore Foundation invited us to study the Arch as a subject for our research. It was a huge practical challenge, but it was very exciting and motivating to be working on such a significant real-world problem.”

Derek Pullen, Head of Sculpture Conservation at Tate, concluded:

“The outcome is a positive one for everyone involved, and our aim is now to expand across a wide range of artefacts from armoury to pottery and painting. Our methods could remove much of the guesswork from planning conservation treatment and could become an indispensable tool in the care of collections.”

Source: Imperial College London

Citation: Henry Moore sculpture could be re-erected thanks to 21st century science (2008, May 13) retrieved 23 September 2023 from <https://phys.org/news/2008-05-henry-sculpture-re-erected-21st-century.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--