

High efficiency infrared photodetectors using gold nanorods

March 25 2011, By Adarsh Sandhu

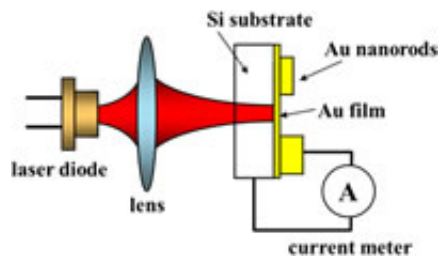


Fig.1: Device structure

Toyohashi Tech researchers develop an innovative infrared photodetector exploiting ‘plasmon resonance’ at the surface of gold nanorods. This technology shows potential as the basis for the development of high efficiency infra-red photodetectors for optical communications systems.

Toyohashi Tech researchers develop an innovative infrared photodetector exploiting ‘plasmon resonance’ at the surface of [gold](#) nanorods, which enhances the density of photoelectrons excited over the Schottky barrier. This technology shows potential as the basis for the development of high efficiency infra-red [photodetectors](#) for [optical communications](#) systems.

Devices used for the detection of light and other forms of electromagnetic energy include calorimeters, superconducting devices,

and photodiodes used in optical communications systems.

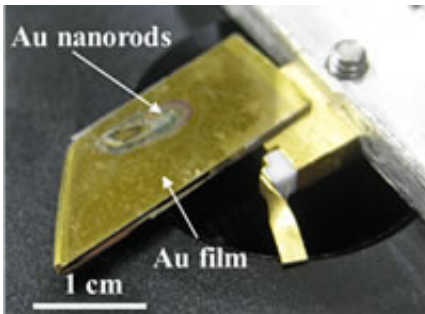


Fig. 2: Experimental set up (above) for measuring the photocurrent of the Au nanorod Schottky photodiodes (below).

Now, typical semiconductor devices include Schottky barrier photodetectors—where a PN junction is not necessary. However, for optical communications systems applications, it is necessary to improve the photo detection efficiency in the 1.3~1.5 micrometer range of wavelengths.

Here, Mitsuo Fukuda and colleagues used the localized surface plasmon (LSP) effects exhibited by gold nano-rods to improve the optical response of Schottky photodiodes. Notably, the desired resonance wavelength can be obtained by appropriate choice of the dimensions of gold nanorods. Thus combining Schottky barriers with gold nanorods holds promise as a means of producing high efficiency photodiodes.

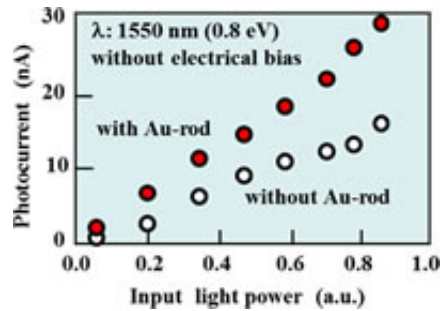


Fig. 3: Experimental results showing the significant increase in the photocurrent of the device with the gold nano rods.

Fig. 1 shows the structure and dimension of the gold nanorod Schottky diode photodetector, where 10 nm x 100 nm gold rods were used. Fig .2 shows the experimental set up and Fig. 3 the experimental results for light of 1500 nm, showing a significant increase in the photocurrent of the device with the gold [nanorods](#).

Provided by Toyohashi University of Technology

Citation: High efficiency infrared photodetectors using gold nanorods (2011, March 25)
retrieved 25 April 2024 from
<https://phys.org/news/2011-03-high-efficiency-infrared-photodetectors-gold.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.