

# Zinc stannate nanostructures: Growing a highly useful semiconductor

March 25 2011, By Mikiko Tanifuji

---

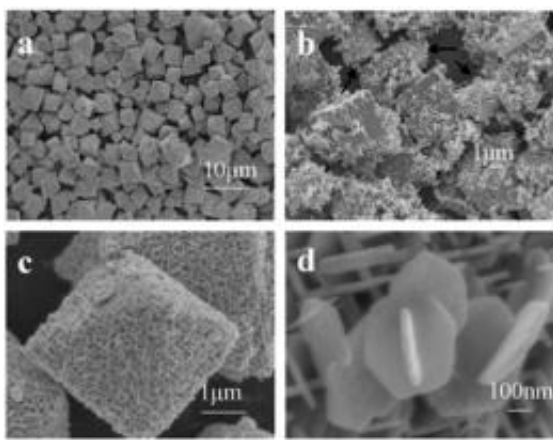


Figure 1: Scanning electron microscope images of ZTO microstructures: (a) low magnification image of the  $\text{Zn}_2\text{SnO}_4$  octahedrons; (b)  $\text{ZnSn}(\text{OH})_6$  cubes formed in the initial stage of the reaction (note secondary nucleation on the cube surfaces); (c) a  $\text{Zn}_2\text{SnO}_4$  octahedron; (d) coalescing nanoplates. Credit: 2010 Elsevier B.V.

This timely review focuses on the synthesis of zinc stannate (zinc tin oxide: ZTO) nanostructures by the hydrothermal method, as well as the physical properties and applications of different zinc stannate nanostructures in solar cells, gas sensors, and photocatalysts.

The review is published in March 2011 in the journal *Science and Technology of Advanced Materials* Vol. 12 (2011) p. 013004. It is presented by Sunandan Baruah and Joydeep Dutta from the Asian

Institute of Technology, Klong Luang, Thailand.

Binary semiconducting oxide [nanostructures](#), such as [zinc oxide](#) and titanium oxide, are widely used in sensors and catalysts. However, ternary semiconducting oxide nanostructures, which show higher [electrical conductivity](#) and are more stable than the binary type, are increasingly in demand for specific applications due to their particular physical properties. In contrast to conventional ‘top-down’ processes involving physically breaking large macroscopic materials into nanoparticles, the chemically based ‘self-organization’ approach offers an inexpensive and flexible means of precisely controlling the size, crystal structure and optoelectronic properties of semiconducting oxide nanostructures, which is crucial for the use of ZTO in specific applications.

ZTO nanostructures can be produced using a variety of methods including thermal evaporation, high-temperature calcination, mechanical grinding, sol-gel synthesis, hydrothermal reaction, and ion-exchange reaction. Different methods produce different ratios of ZTO oxides and impurities, expressed in alternative crystal structures. The authors describe the pertinent features of the hydrothermal growth method for synthesizing ZTO, including high purity of the stable [zinc](#) orthostannate  $\text{Zn}_2\text{SnO}_4$  and the accompanying ‘cubic spinel’ crystal structure. Moreover, hydrothermal growth is an attractive and relatively simple method since crystal growth occurs at mild temperatures in water.

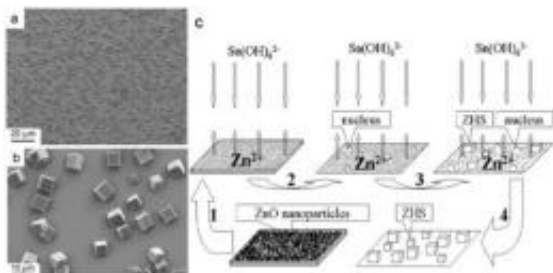


Figure 2. Scanning electron microscope images of zinc hydroxystannate (ZHS) microcubes: (a) lower magnification; (b) higher magnification; (c) schematics of the growth process. Credit: 2007 Elsevier B.V.

Typical hydrothermal growth of ZTO nanostructures consists of using an aqueous mixture of a zinc salt, such as zinc nitrate or zinc chloride, and stannic chloride. This mixture is then reduced at 200-250 C in sodium hydroxide or ammonium hydroxide in a high-pressure environment. Various methods for hydrothermal growth of ZTO nanostructures are detailed by the authors, with varying end products in terms of crystal structure and ‘phase composition’ – amounts of the particular oxides produced.

The physical properties of ZTO depend on the method used for their synthesis. ZTO is a ‘wide-gap’ semiconductor with a bandgap of around 3.6 eV, but the precise bandgap energy depends on the conditions of [synthesis](#), which might result in quantum confinement effects arising from the small size of the nanostructures. Controlling the photoelectrochemical properties of ZTO has practical importance, and relating the optical and electronic properties of ZTO with the composition and crystal structure can pave the way for applications of other complex oxides.

The authors describe industrial applications arising from the photoelectrochemical properties of ZTO. Firstly, as a photocatalyst ZTO can be used for degrading harmful pesticides from ground water; secondly the porous nanostructures are ideal for gas sensing as they offer high surface to volume ratios; and thirdly ZTO has potential in the field of dye-sensitized [solar cells](#), an economically plausible alternative to conventional solar cells. Given that only a few morphologies have been reported, the authors conjecture that within the next decade ZTO

nanostructures will find uses in further industrial applications.

**More information:** Sunandan Baruah and Joydeep Dutta, Zinc stannate nanostructures: hydrothermal synthesis, *Sci. Technol. Adv. Mater.* 12 (2011) 013004. [iopscience.iop.org/1468-6996/12/1/013004](http://iopscience.iop.org/1468-6996/12/1/013004)

Provided by National Institute for Materials Science

Citation: Zinc stannate nanostructures: Growing a highly useful semiconductor (2011, March 25) retrieved 16 August 2024 from <https://phys.org/news/2011-03-zinc-stannate-nanostructures-highly-semiconductor.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--