


# 3-D nanocone solar cell technology cranks up efficiency

April 29 2011

---

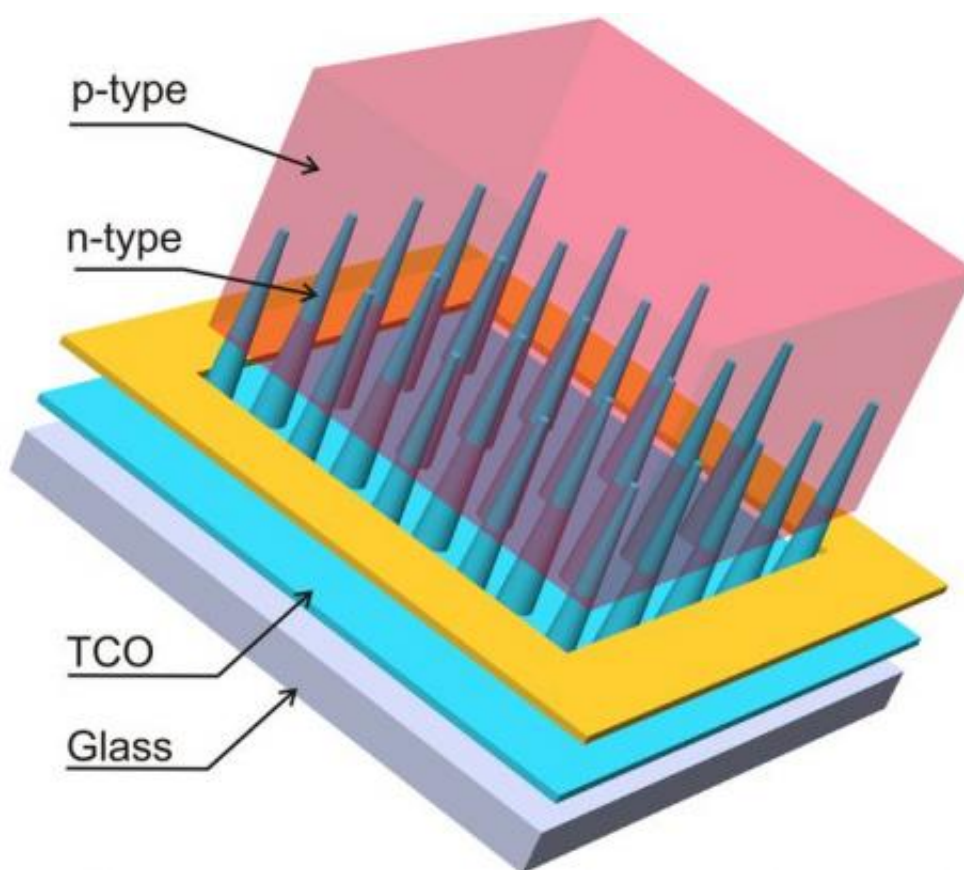

Nanocone-based solar cell consisting of n-type nanocones, p-type matrix, transparent conductive oxide (TCO) and glass substrate.

(PhysOrg.com) -- With the creation of a 3-D nanocone-based solar cell platform, a team led by Oak Ridge National Laboratory's Jun Xu has boosted the light-to-power conversion efficiency of photovoltaics by

nearly 80 percent.

The technology substantially overcomes the problem of poor transport of charges generated by solar photons. These charges -- negative electrons and positive holes -- typically become trapped by defects in bulk materials and their interfaces and degrade performance.

"To solve the entrapment problems that reduce [solar cell efficiency](#), we created a nanocone-based solar cell, invented methods to synthesize these cells and demonstrated improved charge collection efficiency," said Xu, a member of ORNL's Chemical Sciences Division.

The new solar structure consists of n-type nanocones surrounded by a p-type semiconductor. The n-type nanoncones are made of [zinc oxide](#) and serve as the junction framework and the electron conductor. The p-type matrix is made of polycrystalline [cadmium telluride](#) and serves as the primary photon absorber medium and hole conductor.

With this approach at the laboratory scale, Xu and colleagues were able to obtain a light-to-power conversion efficiency of 3.2 percent compared to 1.8 percent efficiency of conventional planar structure of the same materials.

"We designed the three-dimensional structure to provide an intrinsic electric field distribution that promotes efficient charge transport and high efficiency in converting energy from sunlight into electricity," Xu said.

Key features of the solar material include its unique electric field distribution that achieves efficient charge transport; the synthesis of nanocones using inexpensive proprietary methods; and the minimization of defects and voids in semiconductors. The latter provides enhanced electric and optical properties for conversion of solar photons to

electricity.

Because of efficient charge transport, the new solar cell can tolerate defective materials and reduce cost in fabricating next-generation [solar cells](#).

"The important concept behind our invention is that the nanocone shape generates a high [electric field](#) in the vicinity of the tip junction, effectively separating, injecting and collecting minority carriers, resulting in a higher efficiency than that of a conventional planar cell made with the same materials," Xu said.

Research that forms the foundation of this technology was accepted by this year's Institute of Electrical and Electronics Engineers photovoltaic specialist conference and will be published in the *IEEE Proceedings*. The papers are titled "Efficient Charge Transport in Nanocone Tip-Film Solar Cells" and "Nanojunction solar cells based on polycrystalline CdTe films grown on ZnO nanocones."

Provided by Oak Ridge National Laboratory

Citation: 3-D nanocone solar cell technology cranks up efficiency (2011, April 29) retrieved 10 May 2024 from <https://phys.org/news/2011-04-d-nanocone-solar-cell-technology.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--