


Battery research: Bionics reduces filling time

October 17 2011

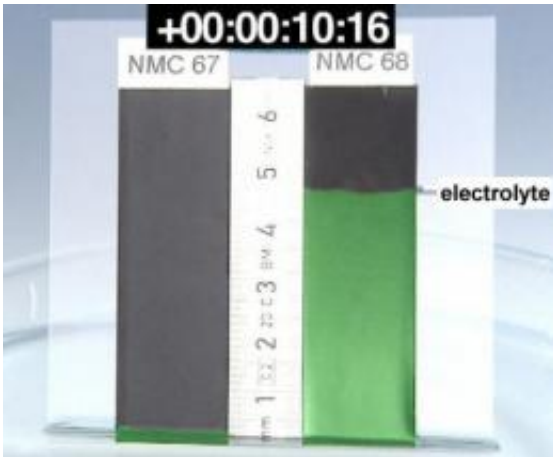

Using the process developed by KIT, filling takes place very rapidly (right). The standard material without any wetting is shown on the left. Credit: KIT

The latest development by engineers of Karlsruhe Institute of Technology (KIT, Germany) is inspired by nature. To fill the porous electrodes of lithium-ion batteries more rapidly with liquid electrolyte, they use a physico-chemical effect that also provides for transport in trees. The new process increases the throughput of battery production and reduces investment costs. These and other innovations will be presented by KIT at the eCarTec International Electromobility Fair in Munich from October 18 to 20.

The [electrodes](#) inside modern batteries are as porous as a sponge. Unlike household [sponges](#), however, pore size is in the micrometer range. As a result, the electrode has a very large surface area and provides much

space for the [chemical processes](#) during electric charge and discharge. This is necessary for developing batteries for [electric vehicles](#) that can cover large distances and be recharged rapidly. "But the [pores](#) have to be filled completely with the electro-lyte in order to work optimally," explains Dr. Wilhelm Pfleging from KIT. The liquid [electrolyte](#) is the transport medium, in which the charged ions can flow between anode and cathode in the battery. "Without electrolyte, there is no charge equalization inside and no current flow outside." The materials used in electrodes and the elec-trolyte of conventional high-energy batteries for automotive indus-try, however, provide for a bad wetting of the electrode surface by the [liquid electrolyte](#) only.

Consequently, much time and expenditure in battery production have been spent so far for making the electrolyte move into the smallest pore, if possible, and for maximizing battery capacity. The liquid is forced to enter the material by expensive and time-consuming storage processes at vacuum or elevated temperatures. "Our new process allows to reduce this time from several hours to a few minutes," confirms Pfleging. To achieve this amazing effect, he relies on nature. By a mechanico-chemical technology, the elec-trodes are modified such that the electrolyte is sucked into the bat-tery as water is sucked into high trees. As a result, the electrolyte spreads very rapidly over the complete material and performance data of batteries based on this principle are much better.

"This novel electrode modification drastically reduces the technical expenditure and production times needed for filling lithium-ion cells with electrolyte," acknowledges Andreas Gutsch. Under the Competence E project, he coordinates the activities of more than 250 scientists at KIT to utilize the large innovation potential of a number of partial improvements and to further develop the entire system. "Now, an interdisciplinary team of physicists, chemists, materials researchers, and process engineers has succeeded in making an important step towards

low-cost batteries." A patent has already been applied for. The process is planned to be integrated in the production lines of battery manufacturers as quickly as possible. "We are pushing licensing to close the innovation gap between development and industry as rapidly as possible. Several renowned companies have already asked for license contracts. At KIT, we are conducting excellent research for application, not for the drawer."

Provided by Helmholtz Association of German Research Centres

Citation: Battery research: Bionics reduces filling time (2011, October 17) retrieved 26 April 2024 from <https://phys.org/news/2011-10-battery-bionics.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.