


Experimental smart outlet brings flexibility, resiliency to grid architecture

February 27 2012

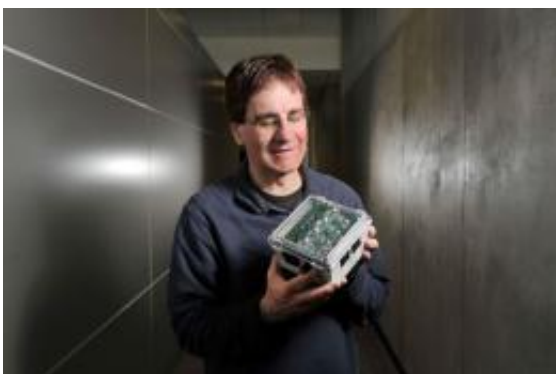

Anthony Lentine with the smart outlet. (Photo by Randy Montoya)

(PhysOrg.com) -- Sandia National Laboratories has developed an experimental "smart outlet" that autonomously measures, monitors and controls electrical loads with no connection to a centralized computer or system. The goal of the smart outlet and similar innovations is to make the power grid more distributed and intelligent, capable of reconfiguring itself as conditions change.

Decentralizing [power generation](#) and controls would allow the grid to evolve into a more collaborative and responsive collection of microgrids, which could function individually as an island or collectively as part of a hierarchy or other organized system.

“A more distributed architecture can also be more reliable because it

reduces the possibility of a single-point failure. Problems with parts of the system can be routed around or dropped on and off the larger grid system as the need arises,” said smart outlet co-inventor Anthony Lentine.

Such flexibility could make more use of variable output energy resources such as wind and solar because devices such as the smart outlet can vary their load demand to compensate for variations in energy production.

“This new distributed, sensor-aware, intelligent control architecture, of which the smart outlet is a key component, could also identify malicious control actions and prevent their propagation throughout the grid, enhancing the grid’s cyber security profile,” Lentine said.

Anatomy of a smart outlet

The outlet includes four receptacles, each with voltage/current sensing; actuation (switching); a computer for implementing the controls; and an Ethernet bridge for communicating with other outlets and sending data to a collection computer.

The outlet measures [power](#) usage and the direction of power flow, which is normally one-way, but could be bi-directional if something like a photovoltaic system is connected to send power onto the grid. Bi-directional monitoring and control could allow each location with its own energy production, such as photovoltaic or wind, to become an “island” when the main [power grid](#) goes down. Currently, that rarely occurs due to the lack of equipment to prevent power from flowing back toward the grid.

The outlet also measures real power and reactive power, which provides a more accurate measurement of the power potentially available to drive

the loads, allowing the outlets to better adapt to changing energy needs and production.

Similar technology could be built into energy-intensive appliances and connected to a home monitoring system, allowing the homeowner greater control of energy use. What is different about the smart outlet is that distributed autonomous control allows a homeowner with little technical expertise to manage loads and the utility to manage loads with less hands-on, and costly, human intervention.

Utilities currently use mostly fossil fuels and nuclear reactors to generate baseload electric power, the amount needed to meet the minimum requirements of power users. Utilities know how much power they need based on decades of usage data, so they can predict demand under normal conditions.

“With the increased use of variable renewable resources, such as wind and solar, we need to develop new ways to manage the grid in the presence of a significant generation that can no longer supply arbitrary power on demand,” Lentine said. “The smart outlet is a small, localized approach to solving that problem.”

More information: [www.energyinnovationsummit.com .../case/pop.html?id=219](http://www.energyinnovationsummit.com.../case/pop.html?id=219)

Provided by Sandia National Laboratories

Citation: Experimental smart outlet brings flexibility, resiliency to grid architecture (2012, February 27) retrieved 20 April 2024 from <https://phys.org/news/2012-02-experimental-smart-outlet-flexibility-resiliency.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.