


# Mars-bound Curiosity craft adjusts path, tests instruments

March 27 2012, By Guy Webster

---

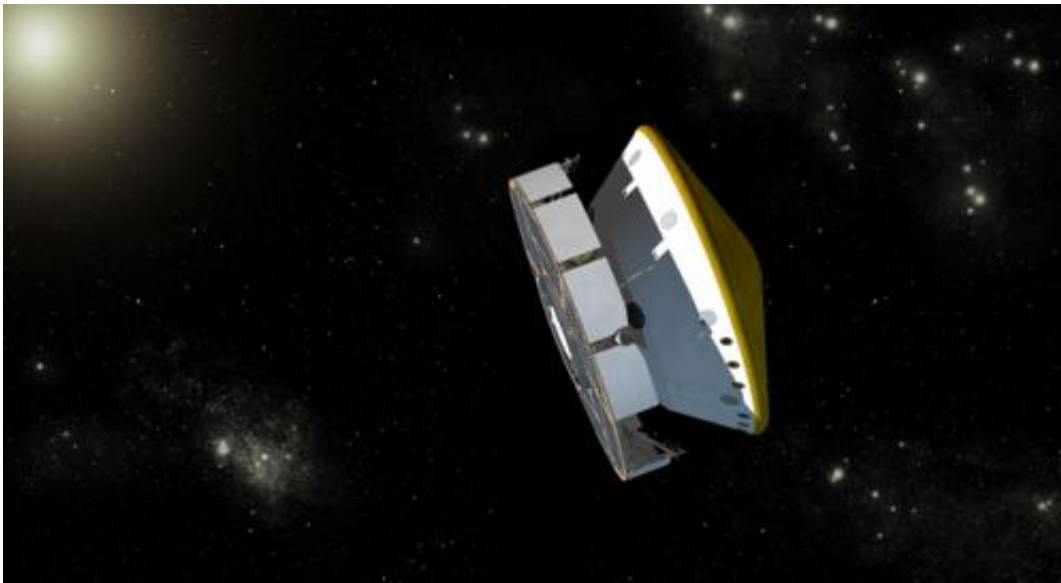

This is an artist's concept of NASA's Mars Science Laboratory spacecraft during its cruise phase between launch and final approach to Mars. The spacecraft includes a disc-shaped cruise stage (on the left) attached to the aeroshell. The spacecraft's rover (Curiosity) and descent stage are tucked inside the aeroshell. Credit: NASA/JPL-Caltech

(PhysOrg.com) -- NASA's Mars Science Laboratory spacecraft, halfway to Mars, adjusted its flight path today for delivery of the one-ton rover Curiosity to the surface of Mars in August.

Tests completed aboard [Curiosity](#) last week confirmed the health of

science instruments the mission will use to learn whether an area holding an extensive record of Martian environmental history has ever offered conditions favorable for [microbial life](#).

In the second of six planned trajectory correction maneuvers during the cruise to Mars, the spacecraft ignited thrusters for nearly nine minutes today. Spacecraft data and Doppler-effect changes in radio signal from the craft, monitored in the mission control room at NASA's Jet Propulsion Laboratory, Pasadena, Calif., indicate the maneuver succeeded.

"It is satisfying to get the second maneuver under our belts and know we are headed in the right direction," said JPL's Erisa Hines, systems lead for the maneuver. "The cruise system continues to perform very well."

"We are now on a trajectory that will put us much closer to the point we want to hit on Aug. 5," added Tomas Martin-Mur, navigation team chief for the mission.

The halfway point of the trip from Earth to Mars will be April 1, in terms of duration. The mission launched Nov. 26, 2011. It will land the evening of Aug. 5, 2012, PDT (early Aug. 6, EDT and Universal Time).

One of Curiosity's 10 science instruments, the Radiation Assessment Detector (RAD) has been collecting data for three months, monitoring the natural radiation environment in interplanetary space. This information, particularly effects RAD has measured from recent solar flares, is crucial for design of human missions to Mars.

In the past two weeks, the rover team has checked the status of the other nine of Curiosity's [science instruments](#), powering them on for the first time since before launch. All the instruments passed these checkouts.

"The types of testing varied by instrument, and the series as whole takes us past the important milestone of confirming that all the instruments survived launch," said Betina Pavri of NASA's Jet Propulsion Laboratory, Pasadena, Calif., science payload test engineer for the mission. "These checkouts provide a valuable calibration and characterization opportunity for the instruments, including camera dark images and a measurement of zero pressure in the vacuum of space for the rover weather station's pressure sensor."

Curiosity's landing site is near the base of a mountain inside Gale Crater, near the Martian equator. Researchers plan to use Curiosity to study layers in the mountain that hold evidence about wet environments of early Mars.

First, the spacecraft must get there. Today's maneuver nudged the spacecraft one-seventh as much as the flight's first course adjustment, on Jan. 11. After the first maneuver, the trajectory would have put Curiosity about 3,000 miles (5,000 kilometers) and 20 minutes away from entering Mars' atmosphere at the right place and time. Like that maneuver, today's combined two ways of using thruster engines while the whole spacecraft spins at two rotations per minute.

The spacecraft's cruise stage carries eight thrusters grouped into two sets of four. The maneuver began with about three minutes of firing one thruster in each set to change velocity along the direction of the axis of rotation. Then, to push the spacecraft in a direction perpendicular to the axis, each set of thrusters was used for five-second pulses when the spacecraft's rotation put that set at the correct orientation. The maneuver used more than 60 of these pulses spaced about 10 seconds apart.

"The purpose is to put us on a trajectory to the point in the Mars atmosphere where we need to be for a safe and accurate landing," said Mau Wong, maneuver analyst at JPL.

The descent from the top of Mars' atmosphere to the surface will employ bold techniques enabling use of a smaller target area and larger landed payload than were possible for any previous Mars mission. These innovations, if successful, will place a well-equipped mobile laboratory into a locale especially well suited for its mission of learning. The same innovations advance [NASA](#) toward capabilities needed for human missions to Mars.

As of March 29, the [spacecraft](#) will have traveled about 196 million miles (316 million kilometers) of its 352-million-mile (567-million-kilometer) flight to [Mars](#).

Provided by JPL/NASA

Citation: Mars-bound Curiosity craft adjusts path, tests instruments (2012, March 27) retrieved 12 May 2024 from <https://phys.org/news/2012-03-mars-bound-curiosity-craft-adjusts-path.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.