


# Nanostructures triple organic solar cells efficiency

December 6 2012

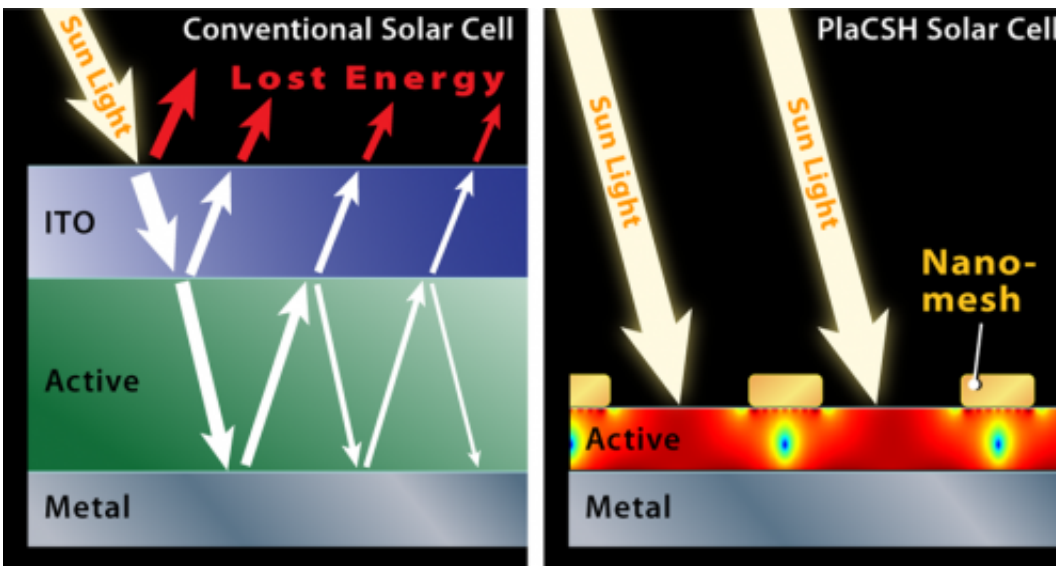

A conventional solar cell, left, reflects light off its surface and loses light that penetrates the cell. New technology, right, developed by Princeton professor Stephen Chou and colleagues in electrical engineering, prevents both types of loss and is much thinner. Credit: Illustration by Dimitri Karetnikov

Princeton researchers have found a simple and economic way to nearly triple the efficiency of organic solar cells, the cheap and flexible plastic devices that many scientists believe could be the future of solar power.

The researchers, led by electrical engineer Stephen Chou, were able to increase the [efficiency](#) 175 percent by using a nanostructured

"sandwich" of metal and plastic that collects and traps light. Chou said the technology also should increase the efficiency of conventional inorganic [solar collectors](#), such as standard silicon solar panels, although he cautioned that his team has not yet completed research with inorganic devices.


Chou said the research team used nanotechnology to overcome two primary challenges that cause [solar cells](#) to lose energy: light reflecting from the cell, and the inability to fully capture light that enters the cell.

With their new metallic sandwich, the researchers were able to address both problems. The sandwich – called a subwavelength plasmonic cavity – has an extraordinary ability to dampen reflection and trap light. The new technique allowed Chou's team to create a solar cell that only reflects about 4 percent of light and absorbs as much as 96 percent. It demonstrates 52 percent higher efficiency in converting light to [electrical energy](#) than a conventional solar cell.

That is for direct [sunlight](#). The structure achieves even more efficiency for light that strikes the solar cell at large angles, which occurs on cloudy days or when the cell is not directly facing the sun. By capturing these angled rays, the new structure boosts efficiency by an additional 81 percent, leading to the 175 percent total increase.

The physics behind the innovation is formidably complex. But the device structure, in concept, is fairly simple.

The top layer, known as the window layer, of the new solar cell uses an incredibly fine [metal mesh](#): the metal is 30 nanometers thick, and each hole is 175 nanometers in diameter and 25 nanometers apart. This mesh replaces the conventional window layer typically made of a material called indium-tin-oxide (ITO).

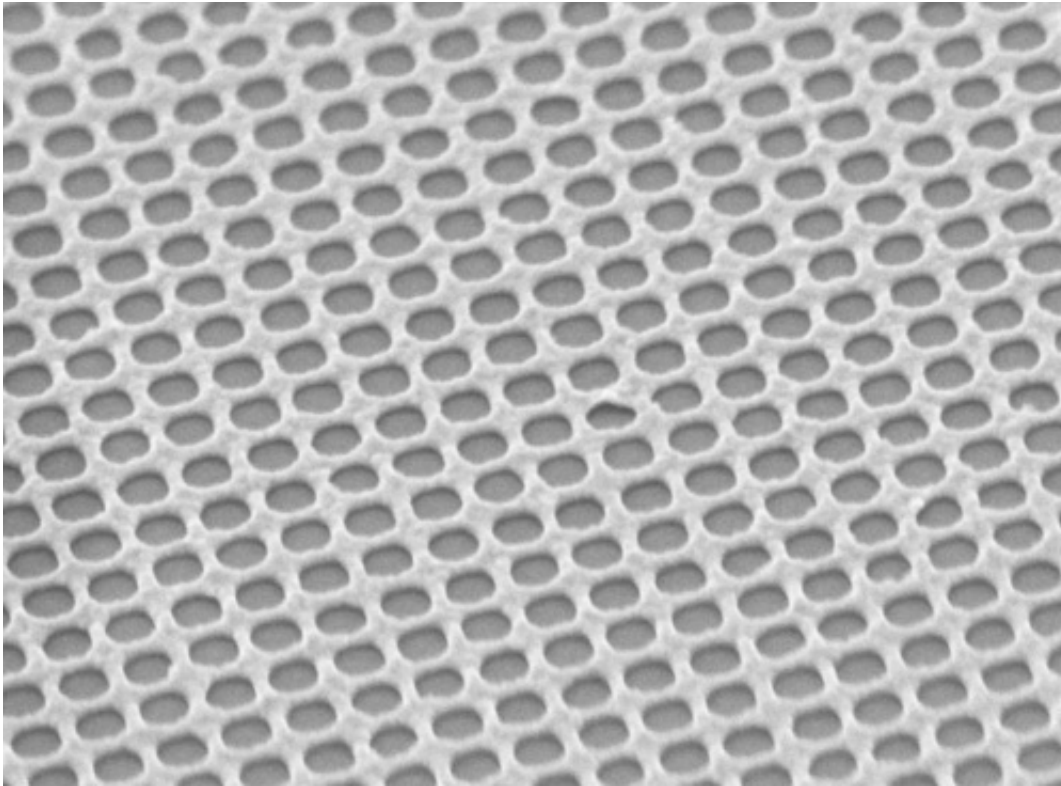


This electron microscope image shows the gold mesh created by Chou and colleagues. Each hole is 175 nanometers in diameter, which is smaller than the wavelength of light. Credit: Image courtesy of the Chou lab

The mesh window layer is placed very close to the bottom layer of the sandwich, the same metal film used in conventional solar cells. In between the two metal sheets is a thin strip of semiconducting material used in [solar panels](#). It can be any type – silicon, plastic or gallium arsenide – although Chou's team used an 85-nanometer-thick plastic.

The solar cell's features – the spacing of the mesh, the thickness of the sandwich, the diameter of the holes – are all smaller than the wavelength of the light being collected. This is critical because light behaves in [very unusual ways](#) in sub-wavelength structures. Chou's team discovered that

using these subwavelength structures allowed them to create a trap in which light enters, with almost no reflection, and does not leave.

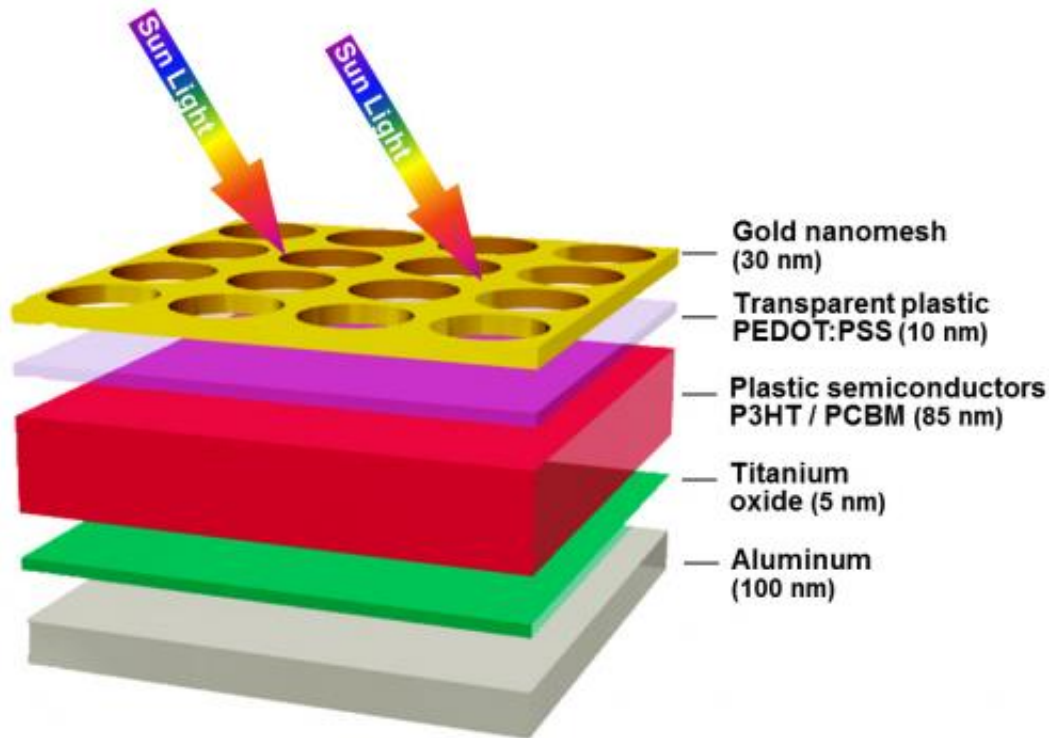

A key part of the new technology is a thin gold mesh, which serves as a "window" layer for the solar cell. Credit: Image courtesy of the Chou lab

"It is like a black hole for light," Chou said. "It traps it."

The team calls the system a "plasmonic cavity with subwavelength hole array" or PlaCSH. Photos of the surface of the PlaCSH solar cells demonstrate this light-absorbing effect: under sunlight, a standard [solar power](#) cell looks tinted in color due to light reflecting from its surface, but the PlaCSH looks deep black because of the extremely low light [reflection](#).

The researchers expected an increase in efficiency from the technique, "but clearly the increase we found was beyond our expectations," Chou said.

Chou and graduate student Wei Ding [reported their findings](#) in the journal *Optics Express*, published online Nov. 28, 2012. Their work was supported in part by the Defense Advanced Research Projects Agency, the Office of Naval Research and the National Science Foundation.

The researchers said the PlaCSH solar cells can be manufactured cost-effectively in wallpaper-size sheets. Chou's lab used "nanoimprint," a low-cost nanofabrication technique Chou invented 16 years ago, which embosses nanostructures over a large area, like printing a newspaper.

Beside the innovative design, the work involved optimizing the system. Getting the structure exactly right "is critical to achieving high efficiency," said Ding, a graduate student in electrical engineering.

Chou said that the development could have a number of applications depending on the type of solar collector. In this series of experiments, Chou and Ding worked with solar cells made from plastic, called organic solar cells. Plastic is cheap and malleable and the technology has great promise, but it has been limited in commercial use because of organic solar cells' low efficiency.

In addition to a direct boost to the cells' efficiency, the new nanostructured metal film also replaces the current ITO electrode that is the most expensive part of most current [organic solar cells](#).

"PlaCSH also is extremely bendable," Chou said. "The mechanical property of ITO is like glass; it is very brittle."

Provided by Princeton University

Citation: Nanostructures triple organic solar cells efficiency (2012, December 6) retrieved 12 September 2024 from

<https://phys.org/news/2012-12-nanostructures-triple-solar-cells-efficiency.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.