


Softening steel problem expands computer model applications

April 16 2013

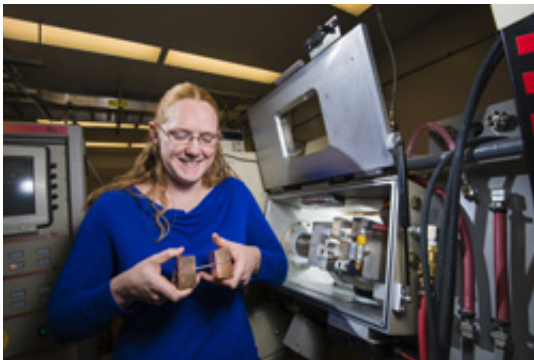

Sandia National Laboratories researcher Lisa Deibler holds a tubing specimen in a grip, ready to load it into the thermal-mechanical experimental system behind her. She and Arthur Brown at Sandia's California site worked together to develop a simulation for an annealing process to soften tubing that was too hard for the requirements of the job. Credit: Randy Montoya

(Phys.org)—Sandia National Laboratories researchers Lisa Deibler and Arthur Brown had a ready-made problem for their computer modeling work when they partnered with the National Nuclear Security Administration's Kansas City Plant to improve stainless steel tubing that was too hard to meet nuclear weapon requirements.

When steel is too hard it becomes brittle, so the plant ended up getting new tubing. However, Deibler said KCP needed a backup in case it couldn't find replacements in time to meet deadlines.

Sandia's modeling, coupled with experiments, allowed the rapid design of an annealing process to soften the tubing while keeping the metal's desired structure. The model predicted how the [microstructure](#) would be affected by variations in the process, which improved researchers' confidence that the heat treatment would produce parts that met specifications.

Brown, a modeler at Sandia's Livermore, Calif., site, said working on the model was a natural extension of a larger project, supported by Sandia's Nuclear Weapons program, called Predicting Performance Margins. Under that program, numerous Sandia researchers are studying the way microstructure affects properties of materials at various scales. Brown became involved in the project as a member of a team that developed a thermal-mechanical modeling tool to predict how microstructure and other properties change during forging. That led to his collaboration with Deibler and Joe Puskar, her Sandia technical adviser, on thermal profiles for welds.

When the need arose to address the tubing issue, Puskar contacted Brown to see if he could work with Deibler to help optimize a heat treatment, Brown said.

Experiments, modeling work together

Deibler, a postdoctoral appointee in Sandia's Materials Characterization and Performance Department in Albuquerque, provided experimental data that Brown fed into his model of stainless steel recrystallization. Recrystallization, in which grains in deformed microstructures are replaced by strain-free grains, occurs during annealing—the process of heating metal to dissipate energy built up while the metal is compressed, twisted or otherwise worked. Heat makes the metal softer and more ductile.

Deibler and Brown were able to solve the plant's real-life problem since recrystallization is part of the annealing process. And they were able to do it quickly because the model already existed.

Deibler's experiments indicated it was important to model two softening mechanisms, recovery and recrystallization. Recovery happens first within a microstructure when material is heated and softens. By measuring the hardness and the amount of recrystallization after each heat treatment, the team identified how much softening was due to recovery.

"It was important to model both softening mechanisms because we were seeing microstructures that contained no new recrystallized grains, but which had changed properties from the initial deformed material," Deibler said. "By failing to include the effects of recovery, our model couldn't predict why the properties weren't the same as the initial deformed material. Adding in recovery allowed us to account for the changed properties in microstructures with no recrystallization."

She described the work in a poster, "Design of a [Heat Treatment](#) to Soften Stainless Steel Tubing," presented at Sandia's winter 2012 Post-Doctoral Technical Showcase.

Heated furnace experiments form baseline

The team first developed a baseline for the model. Deibler performed heat experiments on the steel tubing since she didn't know the conditions under which it was manufactured. That effort required "a lot of shipping tubing around the country for various heat treatments," she recalled.

She put tubing samples in Sandia's thermal-mechanical experimental system at various temperatures for different lengths of time. Then she had the tubing sectioned, polished and etched, and analyzed the images

to see how much the microstructures had recrystallized. Brown fit her data with the model to simulate different heat treatments.

The simulation also required details about the furnace where the tubing would be softened. Heating a furnace quickly tends to overshoot the desired temperature, so the team used the model to determine whether it was better to heat the furnace quickly or slowly raise it to the correct temperature, Deibler said. Once Brown identified the optimal rate of increase and other factors, KCP technicians filled a furnace with tubing and measured temperatures at several locations inside. Brown then ran those profiles through the model, which allowed him to predict the impact of temperature variations on the tubing's final properties.

Forging, welding considered for computer model

The researchers want the model to handle both forging and welding because in some ways the two processes work against one another. Forging steel gives it a strong microstructure, but welding adds heat that can destroy those properties. "So if you were able to model that process, that would provide a lot more confidence in the overall modeling that their parts aren't going to fail," Deibler said.

In the future, the researchers want use the model for all kinds of welding at Sandia: laser welding, resistance welding and gas tungsten arc welding. Types of welding vary in their thermal rates—how fast something is heated.

"Looking at how different heating and cooling rates affect the microstructure during welding would give us valuable information," Deibler said.

Provided by Sandia National Laboratories

Citation: Softening steel problem expands computer model applications (2013, April 16)
retrieved 25 April 2024 from
<https://phys.org/news/2013-04-softening-steel-problem-applications.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.