


# Solliance and imec achieve 9.7% efficiency with new thin-film CZTSe solar cell

July 4 2013

---

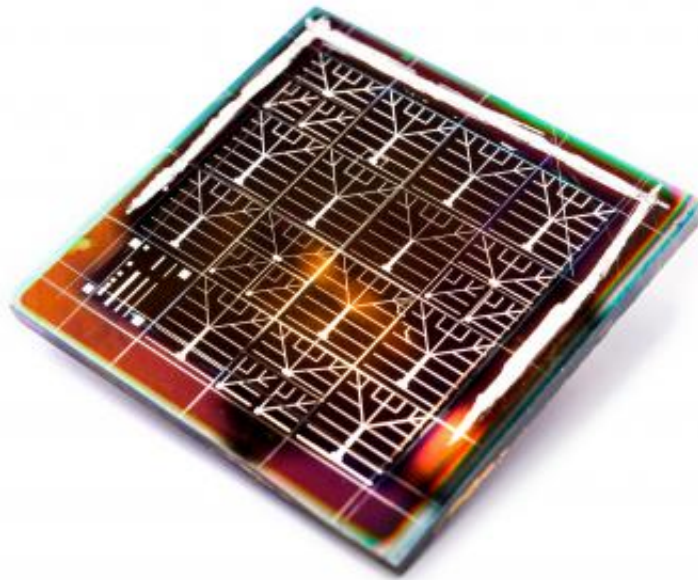

Thin-film CZTSe solar cell achieving 9.7% efficiency

At next week's Intersolar conference in San Francisco, imomec, imec's associated lab at the Hasselt University, and Solliance, the European R&D consortium that focuses on thin-film photovoltaic solar energy (PV), will present a CZTSe ( $\text{Cu}_2\text{ZnSnSe}_4$ )-based solar cell with 9.7 percent efficiency ( $1 \times 1 \text{ cm}^2$ , AM1.5G). This promising result is an important step bringing the solar industry closer to a sustainable

alternative for the highest efficiency thin-film solar cells in production, based on CIGS ( $\text{Cu(In,Ga)(S,Se)}_2$ ).

CZTSe is an emerging alternative solar cell absorber in thin-film solar cells, similar to CZTS ( $\text{Cu}_2\text{ZnSnS}_4$ ). Unlike CIGS, CZTS and CZTSe do not suffer from abundance issues. At 1.5-1.6eV for CZTS, and 0.9eV for CZTSe, their bandgaps make a combined material system ideal for a multi-junction, thin-film solar cell that rivals the efficiency of CIGS cells (about 20 percent). Imomec, imec and Solliance have defined a path towards further improving the layers and cell structures of CZTSe and CZTS absorbers aiming at developing a multi junction CZTS/CZTSe solar cell with 20 percent cell efficiency. The presented CZTSe solar cell is an important step forward to reach this goal.

Imec/imomec fabricated the CZTSe layers by sputtering Cu, Zn and Sn metal layers on a Molybdenum-on-glass substrate and subsequent annealing in an  $\text{H}_2\text{Se}$  containing atmosphere, achieving 9.7 percent efficiency. The resulting polycrystalline absorber layers are only  $1\mu\text{m}$  thick, with a typical grain size of about  $1\mu\text{m}$ . The samples were then processed at Helmholtz Zentrum Berlin into solar cells using a standard process flow for thin film solar cells and finished with a metal grid and anti-reflective coating at imec. The highest [efficiency](#) obtained on a  $1\text{cm}^2$  cell was 9.7 percent, with a maximum short circuit current of  $38.9\text{mA}/\text{cm}^2$ , an open circuit voltage of 0.41V and a fill factor of 61 percent.

"This is a big win for us. We've been working toward this milestone since 2011 when we first started our research on alternative materials for thin-film photovoltaics at imec/imomec," said Marc Meuris, program manager Solliance of the alternative thin-film PV program. "Our efficiencies are the highest in Europe and approaching the world record for this type of thin-film [solar cells](#), and we look forward to further advancing R&D to help bringing to market sustainable energy sources."

The sputtering of the Cu, Zn, Sn layers was performed at Flamac (Gent), and the international glass manufacturer AGC delivered Molybdenum-on-glass substrates. Imec's thin-film solar cell activities at imomec ([imec](#)'s associated laboratory at the university of Hasselt) are integrated in the Solliance cross-border collaboration platform, and the research was partially supported by the Flemish 'Strategisch Initiatief Materialen' (SIM) SoPPoM program.

Provided by IMEC

Citation: Solliance and imec achieve 9.7% efficiency with new thin-film CZTSe solar cell (2013, July 4) retrieved 6 May 2024 from <https://phys.org/news/2013-07-solliance-imec-efficiency-thin-film-cztse.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--