


The positive sides of doping: Scientists boost CdTe solar cell efficiency

August 13 2013

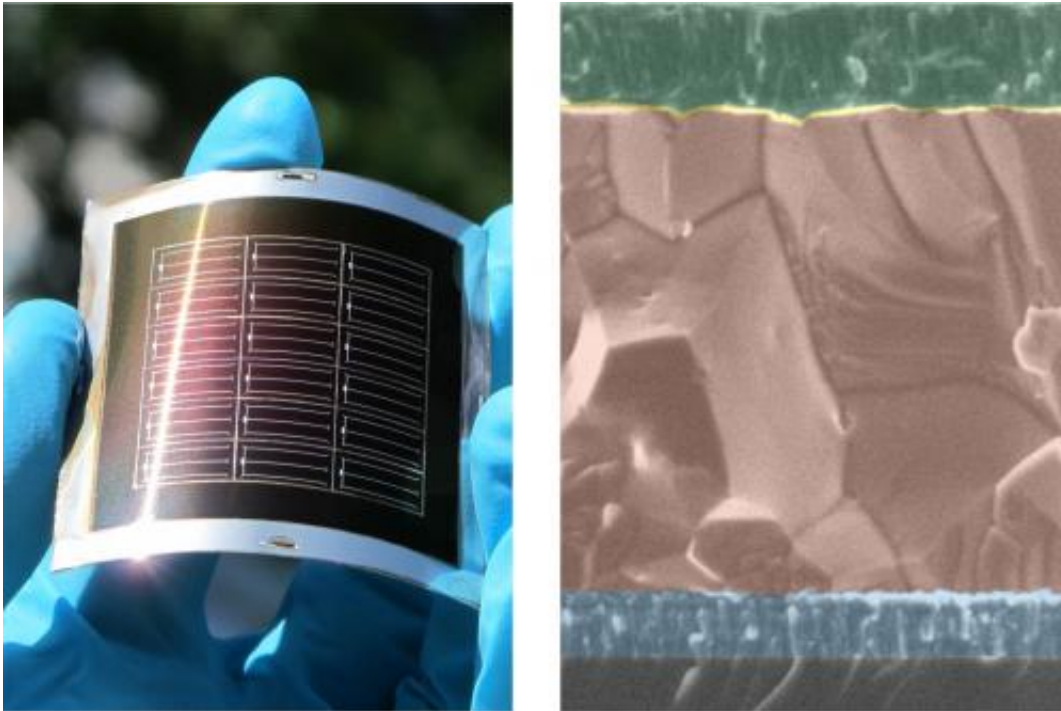

This shows the CdTe solar cells on a flexible metal foil (left) and electron microscopy (EM) image of the solar cell structure in the substrate configuration (right) with front electrical contact (uppermost layer), central CdTe layer and metal back contact (lowest layer), all deposited on the substrate (glass is used as an example for ease and clarity of EM imaging). Credit: Empa

Flexible thin film solar cells that can be produced by roll-to-roll manufacturing are a highly promising route to cheap solar electricity. Now scientists from Empa, the Swiss Federal Laboratories for Materials

Science and Technology, have made significant progress in paving the way for the industrialization of flexible, light-weight and low-cost cadmium telluride (CdTe) solar cells on metal foils. They succeeded in increasing their efficiency from below eight to 11.5 percent by doping the cells with copper, as they report in the current issue of *Nature Communications*.

In order to make [solar energy](#) widely affordable scientists and engineers all over the world are looking for low-cost production technologies. Flexible [thin film solar cells](#) have a huge potential in this regard because they require only a minimum amount of materials and can be manufactured in large quantities by roll-to-roll processing. One such technology relies on [cadmium telluride](#) (CdTe) to convert sunlight into electricity. With a [current market](#) share that is second only to silicon-based solar cells CdTe cells already today are cheapest in terms of production costs. Grown mainly on rigid glass plates, these so-called superstrate cells have, however, one drawback: they require a transparent supporting material that lets sunlight pass through to reach the light-harvesting CdTe layer, thus limiting the choice of carriers to [transparent materials](#).

The inversion of the solar cell's multi-layer structure – the so-called substrate configuration – would allow further cost-cuttings by using flexible foils made of, say, metal as supporting material. Sunlight now enters the cell from the other side, without having to pass through the supporting substrate. The problem, though, is that CdTe cells in substrate configuration on metal foil thus far exhibited infamously low efficiencies well below eight percent – a modest comparison to the recently reported record efficiency of 19.6 percent for a lab-scale superstrate CdTe cell on glass. (Commercially available CdTe superstrate modules reach efficiencies of between 11 and 12 percent.)

Copper doping for solar cells

One way to increase the low energy conversion efficiency of substrate CdTe cells is p-type doping of the semiconductor layer with minute amounts of metals such as copper (Cu). This would lead to an increase in the density of "holes" (positive charge carriers) as well as their lifetimes, and thus result in a high photovoltaic power, the amount of sunlight that is turned into electrical energy. A perfect idea – if CdTe weren't so notoriously hard to dope. "People have tried to dope CdTe cells in substrate configuration before but failed time and again", explains Ayodhya Nath Tiwari, head of Empa's laboratory for Thin Films and Photovoltaics.

His team decided to try nonetheless using high-vacuum Cu evaporation onto the CdTe layer with a subsequent heat treatment to allow the Cu atoms to penetrate into the CdTe. They soon realized that the amount of Cu had to be painstakingly controlled: if they used too little, the efficiency wouldn't improve much; the very same happened if they "over-doped".

The electronic properties improved significantly, however, when Lukas Kranz, a PhD student in Tiwari's lab, together with Christina Gretener and Julian Perrenoud fine-tuned the amount of Cu evaporation so that a mono-atomic layer of Cu would be deposited on the CdTe. "Efficiencies increased dramatically, from just under one percent to above 12", says Kranz. Their best value was 13.6 percent for a CdTe cell grown on glass; on metal foils Tiwari's team reached efficiencies up to 11.5 percent.

Increasingly ambitious targets: hitting the 20 percent ceiling

For now, the highest efficiencies of flexible CdTe solar cells on metal foil are still somewhat lower than those of flexible [solar cells](#) in superstrate configuration on a special (and expensive) transparent

polyimide foil, developed by Tiwari's team in 2011. But, says co-author Stephan Buecheler, a group leader in the lab: "Our results indicate that the substrate configuration technology has a great potential for improving the efficiency even further in the future." Their short-term goal is to reach 15 percent. "But I'm convinced that the material has the potential for efficiencies exceeding 20 percent." The next steps will focus on decreasing the thickness of the so-called window layer above the CdTe, including the electrical front contact. This would reduce light absorption and, therefore, allow more sunlight to be harvested by the CdTe layer. "Cutting the optical losses" is how Tiwari calls it.

More information: Kranz L, Gretener C, Perrenoud J, Schmitt R, Pianezzi F, La Mattina F, Blösch P, Cheah E, Chirilă A, Fella CM, Hagendorfer H, Jäger T, Nishiwaki S, Uhl AR, Buecheler S, Tiwari AN; Doping of polycrystalline CdTe for high efficiency solar cells on flexible metal foil; *Nature Communications*, [DOI: 10.1038/ncomms3306](https://doi.org/10.1038/ncomms3306)

Provided by Swiss Federal Laboratories for Materials Science and Technology

Citation: The positive sides of doping: Scientists boost CdTe solar cell efficiency (2013, August 13) retrieved 3 May 2024 from <https://phys.org/news/2013-08-positive-sides-doping-scientists-boost.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
