


Researchers achieve higher solar-cell efficiency with zinc-oxide coating

April 22 2014, by Matt McGowan

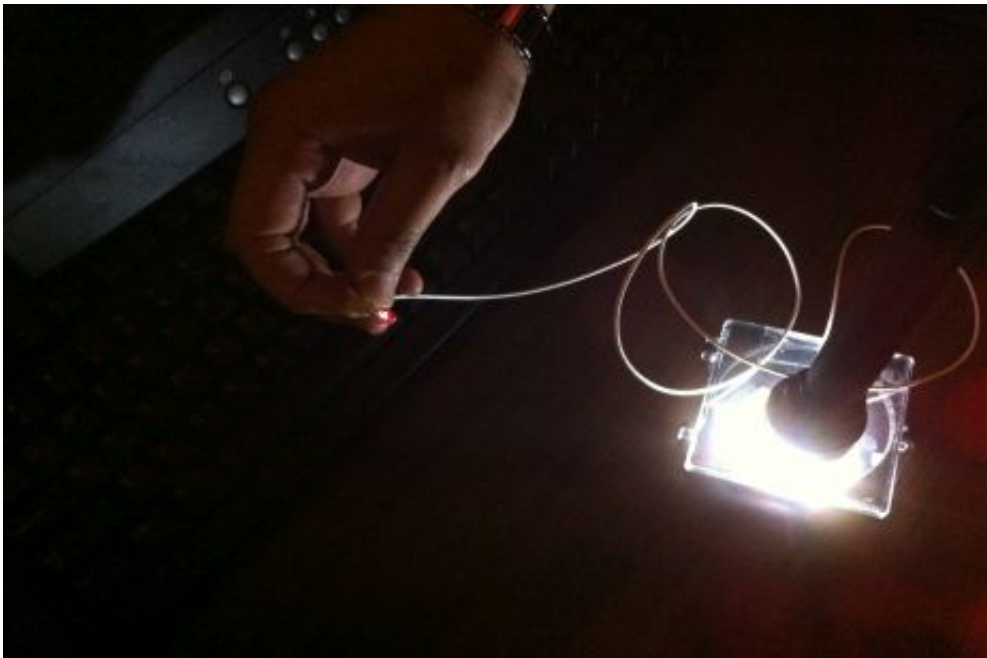

Yahia Makableh demonstrates how a small array of 9-millimeter, gallium-arsenide solar cells can provide energy for small devices.

(Phys.org) —Engineering researchers at the University of Arkansas have achieved the highest efficiency ever in a 9 millimeter-squared solar cell made of gallium arsenide. After coating the cufflink-sized cells with a thin layer of zinc oxide, the research team reached a conversion efficiency of 14 percent.

A small array of these cells – as few as nine to 12 – generate enough energy for small light-emitting diodes and other devices. But surface modification can be scaled up, and the cells can be packaged in large arrays of panels to power large devices such as homes, satellites, or even spacecraft.

The research team, led by Omar Manasreh, professor of electrical engineering, published its findings in *Applied Physics Letters* and the April 2014 issue of *Solar Energy Materials and Solar Cells*.

An alternative to silicon, gallium arsenide is a semiconductor used to manufacture integrated circuits, light-emitting diodes and [solar cells](#). The surface modification, achieved through a chemical synthesis of thin films, nanostructures and nanoparticles, suppressed the sun's reflection so the cell could absorb more light. But even without the surface coating, the researchers were able to achieve 9-percent efficiency by manipulating the host material.

"We want to increase the efficiency of small cells," said Yahia Makableh, doctoral student in electrical engineering. "With this specific material, the theoretical maximum is 33 percent efficiency, so we have some work to do. But we're making progress. The beauty of [zinc oxide](#) is that it's cheap, non-toxic and easy to synthesize."

Makableh said the [surface modification](#) could also be applied to other solar cells, including those made of indium-arsenide and [gallium-arsenide](#) quantum dots. Solar cells made of these materials may be able to achieve 63-percent [conversion efficiency](#), which would make them ideal for future development of solar cells.

Makableh used equipment and instrumentation in the College of Engineering's Optoelectronics Research Lab, which is directed by Manasreh. Researchers in the lab grow and functionalize

semiconductors, nanostructured anti-reflection coatings, self-cleaning surfaces and metallic nanoparticles to be used in solar cells. Their ultimate goal is to fabricate and test photovoltaic devices with greater solar-energy conversion efficiency.

Manasreh focuses on experimental and theoretical optoelectronic properties of semiconductors, superlattices, nanostructures and related devices.

Provided by University of Arkansas

Citation: Researchers achieve higher solar-cell efficiency with zinc-oxide coating (2014, April 22) retrieved 19 April 2024 from <https://phys.org/news/2014-04-higher-solar-cell-efficiency-zinc-oxide-coating.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--