


Researchers uncover properties in nanocomposite oxide ceramics for reactor fuel

September 23 2014

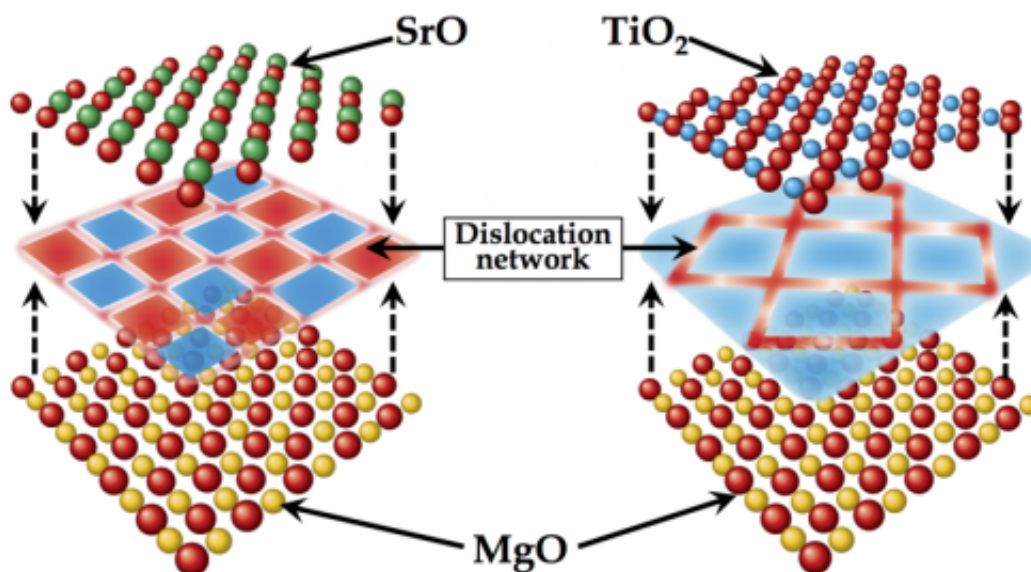

Schematic depicting distinct dislocation networks for SrO- and TiO₂-terminated SrTiO₃/MgO interface. Credit: Los Alamos National Laboratory

Nanocomposite oxide ceramics have potential uses as ferroelectrics, fast ion conductors, and nuclear fuels and for storing nuclear waste, generating a great deal of scientific interest on the structure, properties, and applications of these blended materials.

"The interfaces separating the different crystalline regions determine the

transport, electrical, and radiation properties of the material as a whole," said Pratik Dholabhai, principal Los Alamos National Laboratory researcher on the project. "It is in the chemical makeup of these interfaces where we can improve features such as tolerance against [radiation damage](#) and fast ion conduction."

A composite is a material containing grains, or chunks, of several different [materials](#). In a nanocomposite, the size of each of these grains is on the order of nanometers, roughly 1000 times smaller than the width of a human hair. In the context of nuclear energy, composites have been proposed for the fuel itself, as a way for example, to improve the basic properties of the material, such as the [thermal conductivity](#). It is the thermal conductivity that dictates how efficiently energy can be extracted from the fuel. Composites have also been created to store the by-products of the [nuclear energy](#) cycle, [nuclear waste](#), where the different components of the composite can each store a different part of the waste.

However, composites have much broader applications. The interfaces provide regions of unique electronic and ionic properties and have been studied for enhance conductivity for applications related to batteries and fuel cells.

Mysteries of Misfit Dislocations

Using simulations that explicitly account for the position of each atom within the material, the Los Alamos research team examined the [interface](#) between SrTiO₃ and MgO, demonstrating, for the first time, a strong dependence of the dislocation structure at oxide heterointerfaces on the termination chemistry. SrTiO₃ can be viewed like a layer cake, with alternating planes of SrO and TiO₂. Thus, in principle, when matching SrTiO₃ with another material, there is a choice as to which layer is in contact with the other material. The simulations reveal that

SrO- and TiO₂-terminated interfaces exhibit remarkably different atomic structures. These structures, characterized by so-called misfit dislocations that form when the two materials do not exactly match in size, dictate the functional properties of the interface, such as the conductivity.

The observed relationship between the termination chemistry and the dislocation structure of the interface offers potential avenues for tailoring transport [properties](#) and radiation damage resistance of oxide nanocomposites by controlling the termination chemistry at the interface. This could lead to new functional materials in a number of technological areas. "We believe that this discovery, that the interface structure is sensitive to the chemistry of the interface, will open the door for new research directions in oxide nanocomposites," said Blas Uberuaga, lead researcher on the effort.

More information: The research is described in a paper out this week in *Nature Communications*, "Termination chemistry-driven dislocation structure at SrTiO₃/MgO heterointerfaces."

Provided by Los Alamos National Laboratory

Citation: Researchers uncover properties in nanocomposite oxide ceramics for reactor fuel (2014, September 23) retrieved 3 May 2024 from <https://phys.org/news/2014-09-uncover-properties-nanocomposite-oxide-ceramics.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--