


# Device diminishes instabilities that can damage the interior of fusion facilities

October 28 2014

---

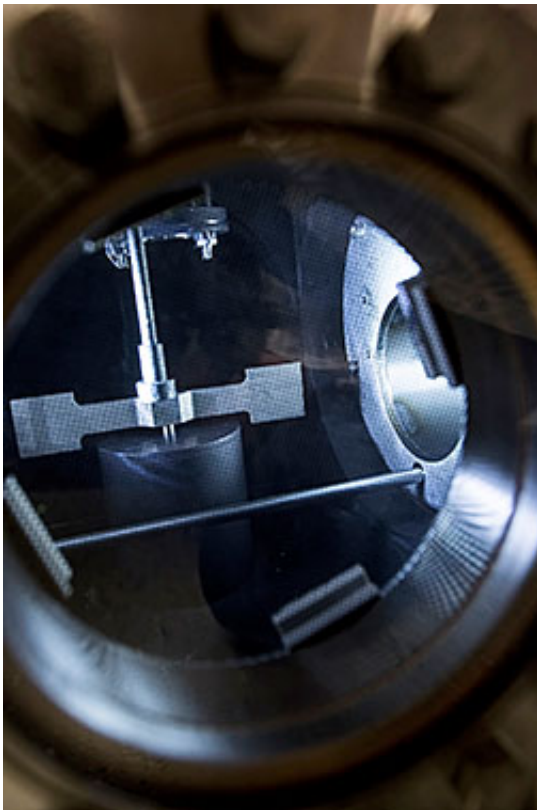

Close-up view of the high-speed propeller inside the injector. Credit: Elle Starkman/PPPL

DOE's Princeton Plasma Physics Laboratory has successfully tested a Laboratory-designed device to be used to diminish the size of instabilities known as "edge localized modes (ELMs)" on the DIII-D tokamak that General Atomics operates for the U.S. Department of

Energy in San Diego. Such instabilities can damage the interior of fusion facilities.

The PPPL device injects granular lithium particles into tokamak plasmas to increase the frequency of the ELMs. The method aims to make the ELMs smaller and reduce the amount of heat that strikes the divertor that exhausts heat in [fusion](#) facilities.

The system could serve as a possible model for mitigating ELMs on ITER, the fusion facility under construction in France to demonstrate the feasibility of fusion energy.

"ELMs are a big issue for ITER," said Mickey Wade, director of the DIII-D national fusion program at General Atomics. Large-scale ELMs, he noted, could melt plasma-facing components inside the ITER tokamak.

General Atomics plans to install the PPPL-designed device, developed by physicist Dennis Mansfield and engineer Lane Roquemore, on DIII-D this fall. Previous experiments using deuterium-injection rather than lithium-injection have demonstrated the ability to increase the ELMs frequency on DIII-D, the ASDEX-Upgrade in Germany and the Joint European Torus in the United Kingdom.

Researchers at DIII-D now want to see how the results for lithium-injection compare with those obtained in the deuterium experiments on the San Diego facility. "We want to put them side-by-side," Wade said.

PPPL-designed systems have proven successful in mitigating ELMs on the EAST tokamak in Hefei, China, and have been used on a facility operated by the Italian National Agency for New Technologies in Frascati, Italy. A system also is planned for PPPL's National Spherical Torus Experiment (NSTX), the Laboratory's major fusion experiment,

which is undergoing a \$94 million upgrade.

PPPL used salt grain-sized plastic pellets as proxies for lithium granules in testing the system for DIII-D. The pellets fell through a pinhole-sized opening inside a dropper to a rotating high-speed propeller that projected them onto a target precisely as planned.

Provided by Oak Ridge National Laboratory

Citation: Device diminishes instabilities that can damage the interior of fusion facilities (2014, October 28) retrieved 24 April 2024 from <https://phys.org/news/2014-10-device-diminishes-instabilities-interior-fusion.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.