


Cheap, environmentally friendly solar cells are produced by minimizing disruptive surface layers

March 4 2015

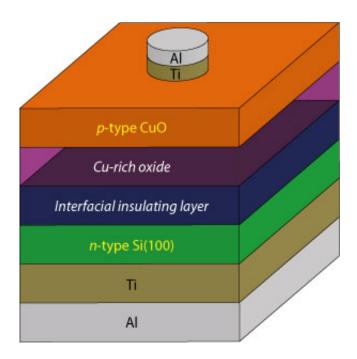

High-performance solar cells can be produced using inexpensive materials by minimizing the copper-rich and interfacial insulating layers in the interface between the cupric oxide (CuO) and silicon (Si) layers. Credit: A*STAR Institute of Materials Research and Engineering

By tailoring the interface between the two sections of a solar cell, A*STAR researchers have produced a high-performance solar cell from the abundant and cheap materials of copper (II) oxide and silicon.



For solar energy to become environmentally friendly and cost effective, the two main components of 'heterojunction' solar cells — the n- and ptype layers — need to be fabricated from nontoxic, abundant materials. Copper (II) oxide, also known as cupric oxide, holds promise as a p-type semiconductor since it meets both these criteria and also has an ideal bandgap for absorbing sunlight and a high light absorption.

On paper, copper oxide and silicon are a perfect pair for producing highperformance solar cells. In practice, however, their performance has been disappointing because of the tendency of holes and electrons to recombine in them — a process known as charge recombination. This recombination limits the production of electricity in a solar cell since it reverses the generation of electrical charges from light. One cause of this problem is the poor quality of the interface between <u>copper oxide</u> and silicon as the result of silicon oxide on the silicon surface.

Now, Goutam Dalapati from the A*STAR Institute of Materials Research and Engineering at Singapore and co-workers have used conventional procedures to produce high-performance <u>solar cells</u> that employ cupric oxide as the p-type material and silicon as the n-type material. They realized this by increasing the pressure during the deposition stage of fabrication, which they found enhances both the crystal and interface quality, thereby reducing the charge recombination rate.

Using a sequence of analytical techniques—Raman spectroscopy, X-ray diffraction, X-ray photoelectron spectroscopy and high-resolution transmission electron microscopy—they showed that the interface quality was limited by the formation of a copper-rich oxide <u>layer</u> as well as by the production of a silicon oxide layer on <u>silicon surface</u>. Dalapati explains that the team were surprised by the formation of this copper-rich layer as the cupric oxide target contained an equal mix of copper and oxygen. But the scientists also discovered that they could minimize



this layer by increasing the pressure during deposition and the annealing time. Using this tactic, the team successfully produced a high-quality solar cell that had a low charge recombination rate.

Dalapati notes that "to develop cost-effective, environmentally friendly photovoltaic devices using Earth-abundant nontoxic <u>cupric oxide</u>, it is essential that we can increase the efficiency further." This is possible, he adds, "by reducing, or even eliminating, the copper-rich interfacial layer and the <u>silicon oxide</u> insulating layer."

More information: Masudy-Panah, S., Dalapati, G. K., Radhakrishnan, K., Kumar, A., Tan, H. R. et al. p-CuO/n-Si heterojunction solar cells with high open circuit voltage and photocurrent through interfacial engineering. Progress in Photovoltaics: Research and Applications advance online publication, 23 February 2014 . <u>DOI: 10.1002/pip.2483</u>

Provided by Agency for Science, Technology and Research (A*STAR), Singapore

Citation: Cheap, environmentally friendly solar cells are produced by minimizing disruptive surface layers (2015, March 4) retrieved 25 April 2024 from https://phys.org/news/2015-03-cheap-environmentally-friendly-solar-cells.html

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.