


Luminescent signals from green glowing diamond defects could monitor temperature with unprecedented versatility

June 16 2015

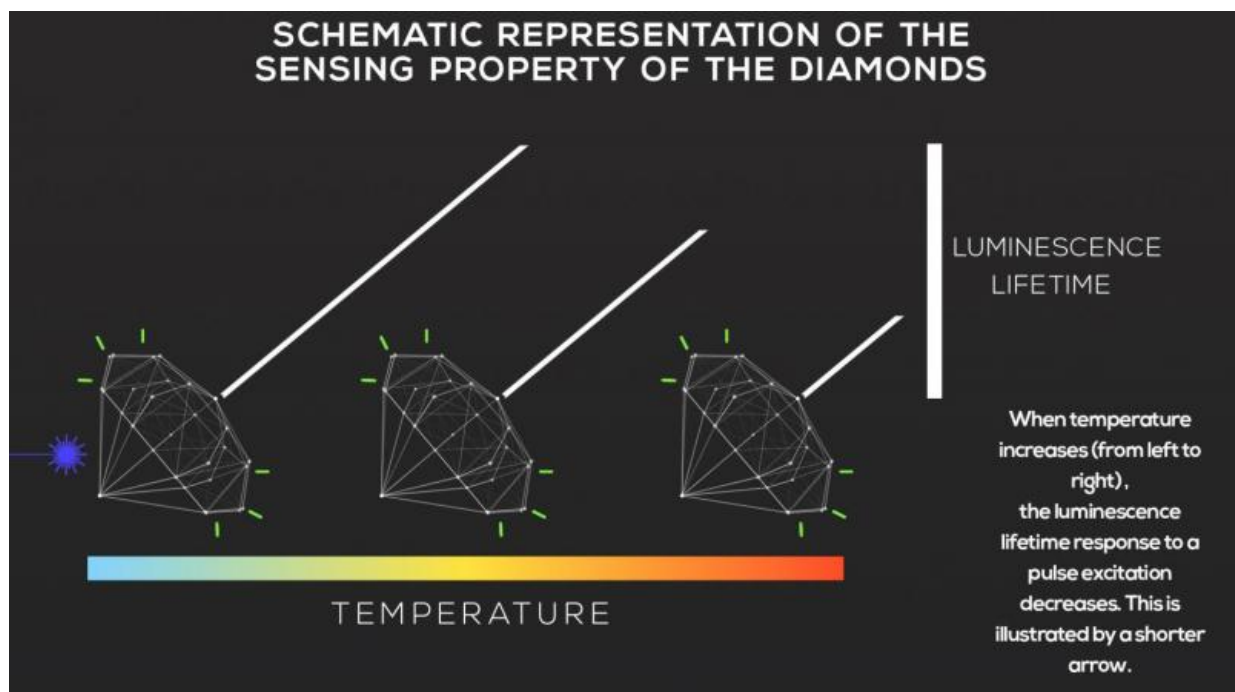

A schematic representation of the temperature sensing properties of diamond defects. Credit: Homeyer, et al./ Université de Lyon

Researchers have developed tiny, diamond-based probes that optically transmit detailed temperature information and can operate in conditions ranging from 150 to 850 degrees Kelvin, representing near-cryogenic

cold to slightly below the melting point of aluminum.

Described in the journal *Applied Physics Letters*, the probes could be used to measure materials' [thermal fluctuations](#) to better understand phenomena like friction and thermoelectricity. The probes may also be used to study temperature in biological systems, since diamond is biocompatible, and on a longer timescale, they might replace other sensors used in industry to monitor extreme environments like the inside of engines, combustion chambers, and high voltage systems.

The heart of the probe is a luminescent diamond defect called a Ni-based S3 defect center. It consists of a linear chain of 1 nitrogen atom, a vacancy, one nickel atom, another vacancy, and another nitrogen atom, all embedded in the crystalline structure of diamond.

'Although its structure seems complicated, it is a very common defect of diamond and, in particular, of artificial diamonds, since nickel is widely used as a synthesis precursor,' said Gilles Ledoux, a CNRS (French National Center for Scientific Research) researcher at the Institute of Light and Matter at the University of Lyon in France.

Like the majority of diamond defects, Ni-based S3 defect centers luminesce, meaning they emit light when excited by a laser pulse. The lifetime of the luminescence decreases as the temperature goes up.

What makes the S3 defect special—and uniquely suitable to act as a temperature probe—is its electronic structure, which has two closely spaced excited energy levels with a thousand-fold difference in radiative lifetimes. The difference means the luminescence is strongly sensitive to temperature variation, the researchers said.

The team tested the probes by attaching micro-diamonds with Ni-based S3 defect centers on silicon and inserting them into a cryostat, a piece of

equipment that could control the temperature from 77 degrees Kelvin (minus 196 degrees Celsius/ minus 321 degrees Fahrenheit) up to 873 Kelvin (600 degrees Celsius/1,112 degrees Fahrenheit). The best results exhibited an accuracy of better than 1 degree Celsius.

The versatility of the diamond [temperature](#) probes, combined with their high performance, sets them apart from other luminescent [temperature sensors](#), the researchers said.

'This sensor combines good sensitivity, fast response speed, a huge range of use, from 150 degrees Kelvin to 850 Kelvin, and a potentially good spatial resolution, only limited by the size of the diamond particles,' said Estelle Homeyer, another member of the research team. 'For each of these criteria one can find a slightly better [sensor] candidate, but none that can combine all of them,' she said.

Perhaps the best advantage of the microdiamond [temperature probes](#), according to the researchers, is that they can detect fast thermal variations, meaning they could be used to measure different materials' thermal properties down to the microscale or potentially nanoscale, if nano-sized probes can be produced.

More information: Diamond contact-less micrometric temperature sensors, by E. Homeyer, S. Pailhès, R. Debord, V. Jary, C. Dujardin, and G. Ledoux, *Applied Physics Letters* on June 16, 2015, [DOI: 10.1063/1.4921177](#)

Provided by American Institute of Physics

Citation: Luminescent signals from green glowing diamond defects could monitor temperature with unprecedented versatility (2015, June 16) retrieved 2 May 2024 from

<https://phys.org/news/2015-06-luminescent-green-diamond-defects-temperature.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.