


Arranging polymer nanotubes in a vertical array enhances piezoelectric properties for acoustic sensors

November 4 2015

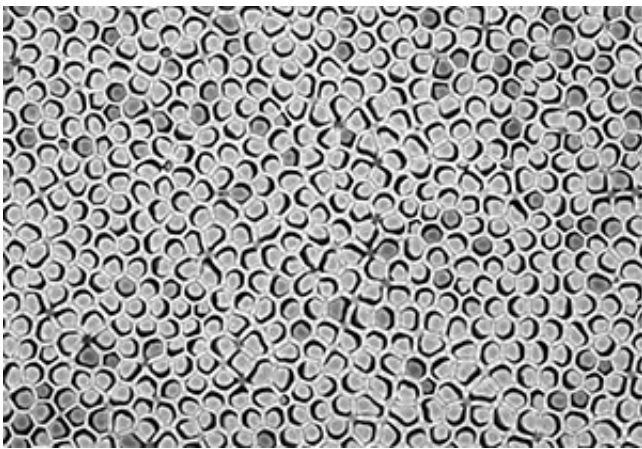

The tips of vertically aligned hollow polymer nanotubes poke out of a porous alumina template. Credit: Reproduced from Ref. 1 and licensed under CC-BY 4.0 © 2014 W. H. Liew et al.

An array of hollow piezoelectric polymer nanotubes grown by A*STAR researchers could be used as an extremely sensitive acoustic sensor.

The tubes are made of a piezoelectric [polymer](#) called poly(vinylidene fluoride-co-trifluoroethylene), or P(VDF-TrFE)—to which applying a voltage causes a change of shape; conversely, the polymer generates a voltage when it is pressed or twisted. Piezoelectric polymers are considerably more flexible than other piezoelectric materials, and are

highly responsive to pressure.

Forming piezoelectric materials into nanotubes can enhance their properties, but flexible polymer nanotubes tend to aggregate into bundles.

Kui Yao and colleagues at the A*STAR Institute of Materials Research and Engineering, and the National University of Singapore, have now developed a method to create vertical arrays of hollow P(VDF-TrFE) nanotubes, significantly increasing their piezoelectric capabilities. "For the first time, we have demonstrated enhanced piezoelectric performance in a high quality P(VDF-TrFE) nanotube array," says Yao.

The team first made a template—a thin sheet of anodized alumina with vertical pores up to 4 micrometers deep and 350 nanometers wide—and added a coating of P(VDF-TrFE). Heating to 250 degrees Celsius melted the polymer into the pores, coating its walls. They repeated the cycle 15 times to create a [polymer coating](#) 60 nanometers thick.

They covered the polymer-loaded template with a thin gold electrode, then flipped the structure over and mounted it on a glass substrate. They used an acid to etch away part of the alumina, exposing the tips of the hollow polymer nanotubes inside (see image), and capped them with another [gold electrode](#).

X-ray diffraction and infrared spectrometry revealed that the electrical polarization of the polymer was aligned with the nanotube's axis, which increased the overall polarization in that direction by 1.5 times. "The dominant mechanism for enhanced piezoelectric performance is based on this unique molecular orientation and the nanotube's structure," says Yao.

The researchers found that an alternating voltage changed the nanotubes'

strain almost twice as much as a standard P(VDF-TrFE) film. They also hypothesized that applying a small stress to the structure could produce a voltage many times larger than conventional piezoelectric materials, and more than three times that of a standard piezoelectric polymer film.

"These are important indicators of a [piezoelectric material](#)'s performance for electromechanical applications such as energy harvesters, sensors and transducers," says Yao. "We are now working towards the demonstration of acoustic sensors using the P(VDF-TrFE) nanotube array, with enhanced sensitivity compared to conventional [piezoelectric](#) films."

More information: Weng Heng Liew et al. Nanoconfinement induced crystal orientation and large piezoelectric coefficient in vertically aligned P(VDF-TrFE) nanotube array, *Scientific Reports* (2015). [DOI: 10.1038/srep09790](#)

Provided by Agency for Science, Technology and Research (A*STAR), Singapore

Citation: Arranging polymer nanotubes in a vertical array enhances piezoelectric properties for acoustic sensors (2015, November 4) retrieved 18 April 2024 from <https://phys.org/news/2015-11-polymer-nanotubes-vertical-array-piezoelectric.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--