

New tech captures over 90% of carbon dioxide from exhaust gases for use in industry

March 17 2016



A fluidised-bed system at TU Wien


Carbon dioxide can be a valuable resource for industry. It can, for example, be used as a fertilizer in greenhouses to improve plant growth.

But for reasons of climate protection, it would be problematic to produce CO₂ for this purpose, using fossil fuels. Filtering CO₂ out of the exhaust gases from industrial processes and turning it into something useful would be much more environmentally friendly.

TU Wien is working with the University of Natural Resources and Life Sciences, Shell and other partners to develop a new kind of [carbon-dioxide](#) separation technique that is both cost and energy efficient. First separation tests in the laboratories at TU Wien have already proven that the technique works. Within the "ViennaGreenCO₂" project, supported by the Austrian Climate and Energy Funds, the separation process will now be further developed and the practical viability of the new concept will be demonstrated at pilot scale at Wien Energie's Simmering power plant.

Solids rather than liquids

"To selectively capture carbon dioxide from exhaust gases, one would usually use aqueous amine solutions as a liquid solvent," says Gerhard Schöny (Institute of Chemical Engineering, TU Wien). However, these amine solvents have significant disadvantages. One major drawback is that a lot of energy is required to remove the CO₂ from the solvent after it has been captured. Furthermore, tall absorption towers are needed so that the amine solvent has enough time to come into contact with the [flue gas](#) and to absorb the desired amount of CO₂. At TU Wien, a different approach for separating CO₂ is being followed.

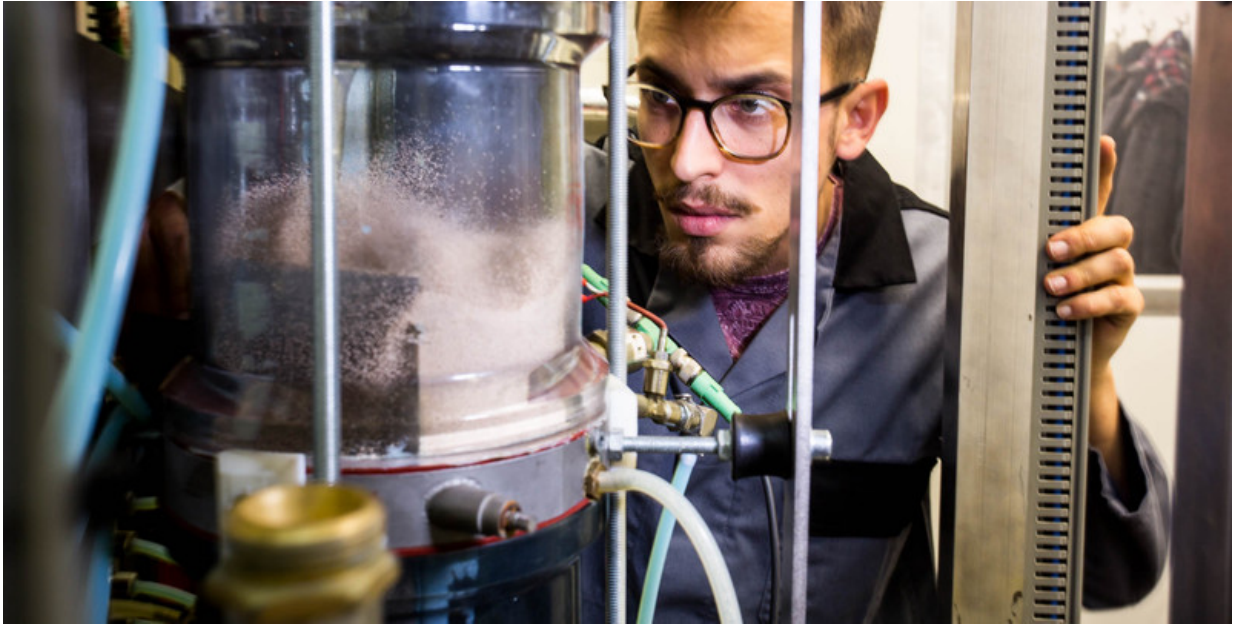

Tests at TU Wien

"We are also working with amines," explains Schöny. "But not in liquid form." At TU Wien, a fluidised-bed system is being used, in which solid particles come into contact with the flue gas. The amines – which play an important role when separating the CO₂ – are applied to the surface of highly porous particles. Schöny is confident that the disadvantages of separation techniques using aqueous amine solutions can largely be overcome that way. Furthermore, the use of fluidised-bed systems may also result in small sizes of the CO₂ separation plant itself, which may lead to further reductions of the CO₂ capture costs as compared to current separation techniques.

The new CO₂ separation process has been in development by TU Wien together with Shell since 2011. It is crucial that the flue gas and the flow of active particles move in opposite directions. "With this basic idea in mind, we designed a reactor consisting of multi-stage fluidized bed

columns," says Gerhard Schöny. The flue gas moves from the bottom to the top, whereas the particles adsorb more and more CO₂ as they move downwards through the adsorber column. The particles are then directed to the regenerator column. There, they are heated up, thereby releasing the CO₂ again. The regenerated particles are then sent back to the adsorber to perform another CO₂ separation cycle.

A bench scale unit has already been built and is being operated at TU Wien, and the concept now needs to be upscaled to pre-industrial levels. "Our bench scale unit can separate around 50 kg of CO₂ every day, but now we want to build a pilot plant that can [separate](#) 5 tonnes per day," says Schöny.



Control Center and test system

Carbon-neutral technology

The bench scale unit has already proven that the principle is sound, as it was possible to capture more than 90% of carbon dioxide. One day, it may be possible to combine these CO₂ separation reactors with biomass power plants. This would mean that electricity can be produced in a carbon-neutral way while the released "green" CO₂ can be captured and used (CCU). Together with the ViennaGreenCO₂ consortium partners, TU Wien wants to clarify the last few technical details over the coming years. The pilot plant should be operational by 2018. The carbon dioxide that is separated by the pilot unit will be further processed and used as fertiliser in a test greenhouse run by LGV Frischgemüse.

Provided by Vienna University of Technology

Citation: New tech captures over 90% of carbon dioxide from exhaust gases for use in industry (2016, March 17) retrieved 20 April 2024 from <https://phys.org/news/2016-03-tech-captures-carbon-dioxide-exhaust.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.