


# Computational methods and experimental techniques reveal important design principles for future nickel catalysts

May 10 2016



Comparing the cost-performance advantage of nickel-based catalysts to three industry-standard precious metals used today: iridium, platinum, and palladium. Credit: Varinia Bernales

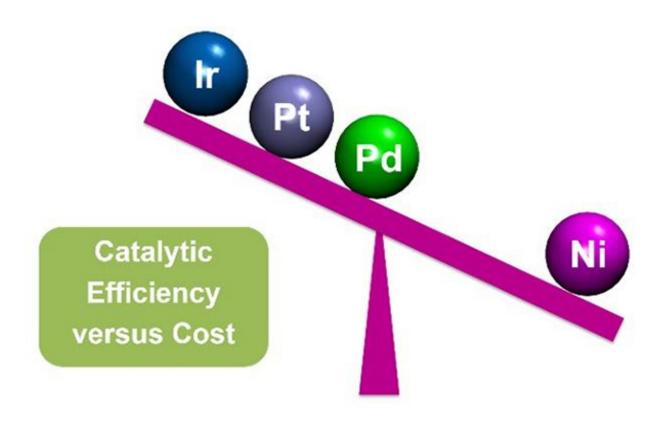


Affordability is one of the greatest challenges to the spread of catalyst-based energy technologies. The main reason is the reliance on precious metals, such as platinum, whose market value is ~\$950 an ounce. In industry, platinum-containing catalysts dramatically enhance the speed of different reactions to make a variety of fuel sources viable for harvesting energy. Scientists at two Energy Frontier Research Centers (EFRCs), the Center for Molecular Electrocatalysis (CME) and the Inorganometallic Catalyst Design Center (ICDC), have made advancements in developing nickel-based catalysts. Nickel, whose market price of less than \$4 a pound, is an attractive alternative to expensive and rare metals.

## A roadmap for optimizing designer catalysts

In nature, enzymes-biological catalysts-have evolved to help enable reactions essential to life-giving processes. Some of these processes require a large amount of energy or they will not occur under normal conditions. Catalysts open up a new route for a reaction, like taking the easier route through the mountains rather than climbing the tall peaks. Catalysts are chemicals or structures that make unlikely reactions possible, such as helping two molecules bind together. While catalysts are produced commercially for many different reactions, a major challenge is tailoring a <u>catalyst</u> to a specific reaction, a process we refer to as optimization.

Scientists at CME are working on optimizing the reaction pathways nickel-based catalysts should follow. They are tackling this challenge in the context of producing <a href="hydrogen gas">hydrogen gas</a>. A group led by Simone Raugei used computer modeling and simulation to investigate the plethora of possible reaction pathways. In complementary work, Eric Wiedner led another CME group that employed electrochemical analysis to clarify what step sequence was followed in producing hydrogen.



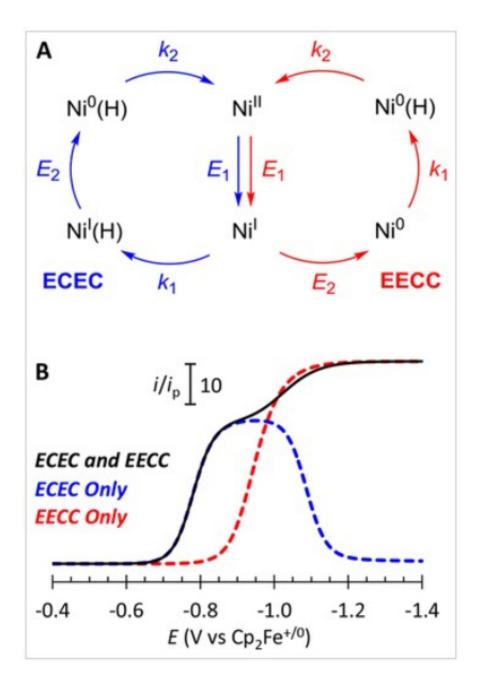

Part A demonstrates how EECC and ECEC cycles overlap during the production of hydrogen gas by a nickel catalyst. Part B illustrates how computer modeling can predict the electrochemical reaction behavior of the different pathways individually and how they would act together in conditions where the pathways compete. Credit: American Chemical Society 2016



The result of their synergistic effort was a comprehensive energy road map of all the possible reactions to get to the final destination of producing hydrogen gas. In the "energy road map," they detailed all the thermodynamics and kinetics; that is, the probabilistic energy distributions and motion-dependence of each potential route. This works similar to a traffic overlay on a map: the thermodynamics and kinetics, like the colors on a traffic overlay, will tell you which route is most efficient to get you home.

For a catalyst to produce hydrogen gas, both electrical charge, in the form of electrons, and chemical components, in the form of protons, must be transferred. We refer to the electron transfer as an "E" step and the proton transfer as a "C" step. When producing hydrogen gas, the reaction needs two E steps and two C steps. Because we know kinetics matter, finding the right pathway is crucial, and much of it comes down to which step should be taken first.

Two potential pathways were proposed: ECEC and EECC. The CME teams modeled these cycles using a nickel-based catalyst and a chemical source of protons. They looked at the kinetics of both reaction pathways using their modeling approach.


#### The result?

The scientists showed that the EECC reaction pathway was faster because of the chemistry happening on the <u>nickel catalyst</u>, but the ECEC reaction pathway was more energy efficient. What this means is that the catalytic energy road map allowed the CME scientists to predict how to change reaction conditions to maximize the reaction rate or energy efficiency. Their methods provide a basis for calculations on other catalysts and, in general, help contribute to designing better catalysts.

# Controlling catalyst design: Decorated metal-organic



## frameworks

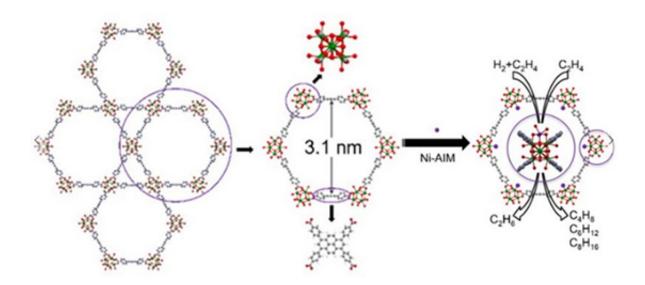

A complete molecular diagram of the nickel-deposited MOF catalyst. The hydrogenation reaction of ethylene and other hydrocarbons is depicted by the right-most image. Credit: Varinia Bernales (modified from American Chemical Society)

Part of creating a successful catalyst is having an efficient scaffold to mount it on. A class of materials known as metal-organic frameworks (MOFs) represents an ideal platform to locate single-site metal catalysts to increase the performance of well-established molecular catalysts. MOFs are porous materials formed from two types of building blocks: metal oxide clusters (nodes) and organic molecules that bridge the clusters. The variety of possible combinations of these blocks allows scientists to design and then tune properties such as stability and porosity to create ideal binding sites; that is, specific locations where the reaction takes place.

In early work, a team of experimental and computational scientists from



the ICDC looked at three MOFs, named UiO-66, UiO-67, and NU-1000, decorated with single iridium atoms. The goal was to connect the influence of binding site design in the MOF with the catalytic performance of the iridium-containing catalyst. To control the anchoring site for the <a href="metal catalyst">metal catalyst</a>, they introduced defects, or imperfections, into the MOF's nodes.

To measure the catalytic activity of the newly modified MOF, the team used light absorbance over a wide spectrum to track its properties. During the spectral measurements, the response of one of the iridiumbound groups, a carbonyl group, to changes in environment was found to predict catalytic activity. Based on these results, scientists exploited the spectral data to still further improve their control over engineered catalyst construction.

Once the effect of the MOF platform on the anchored catalyst was identified, a different team from ICDC used it for a nickel catalyst. The MOF they used was NU-1000, which has pores about three times larger than the UiO MOFs. To install nickel in NU-1000, the team used the atomic layer deposition in MOF (AIM) technique to coat the interior reactive surfaces of the MOF with the metal catalyst.

After deposition, a technique that measures the absorbance of X-ray frequencies confirmed that nickel only localized at reactive sites in NU-1000, marking this as the first time AIM incorporated a nickel compound into a MOF. Furthermore, the regular distribution of nickel through the MOF made the new catalyst optimized for higher performance.

After activation of the new nickel-decorated MOF catalyst, the team compared it side-by-side with a standard platinum catalyst performing the same chemical reaction: the hydrogenation of ethylene; that is, adding hydrogen to another molecule. They found that, under an



otherwise inert, non-reactive atmosphere, the nickel catalyst performed at a rate that made it significantly more cost effective than the platinum.

Nickel performed at a turnover rate of one molecule per binding site every second, while platinum reacts at a rate of about 35 per second. Although platinum is more efficient in terms of speed, the performance of the nickel is a significant gain in cost efficiency for this reaction, because platinum is more than 1000 times more expensive than nickel.

## Platinum today, nickel tomorrow?

The industry standard is platinum catalysts, and it likely will be for a little longer yet. However, the advances made by these EFRCs in understanding principles and design point the way to tailor-making new catalysts with properties that may make them more economical than the ones used today.

## Provided by Pacific Northwest National Laboratory

Citation: Computational methods and experimental techniques reveal important design principles for future nickel catalysts (2016, May 10) retrieved 17 July 2024 from <a href="https://phys.org/news/2016-05-methods-experimental-techniques-reveal-important.html">https://phys.org/news/2016-05-methods-experimental-techniques-reveal-important.html</a>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.