


# Exploring superconducting properties of 3-D printed parts

July 18 2016

---

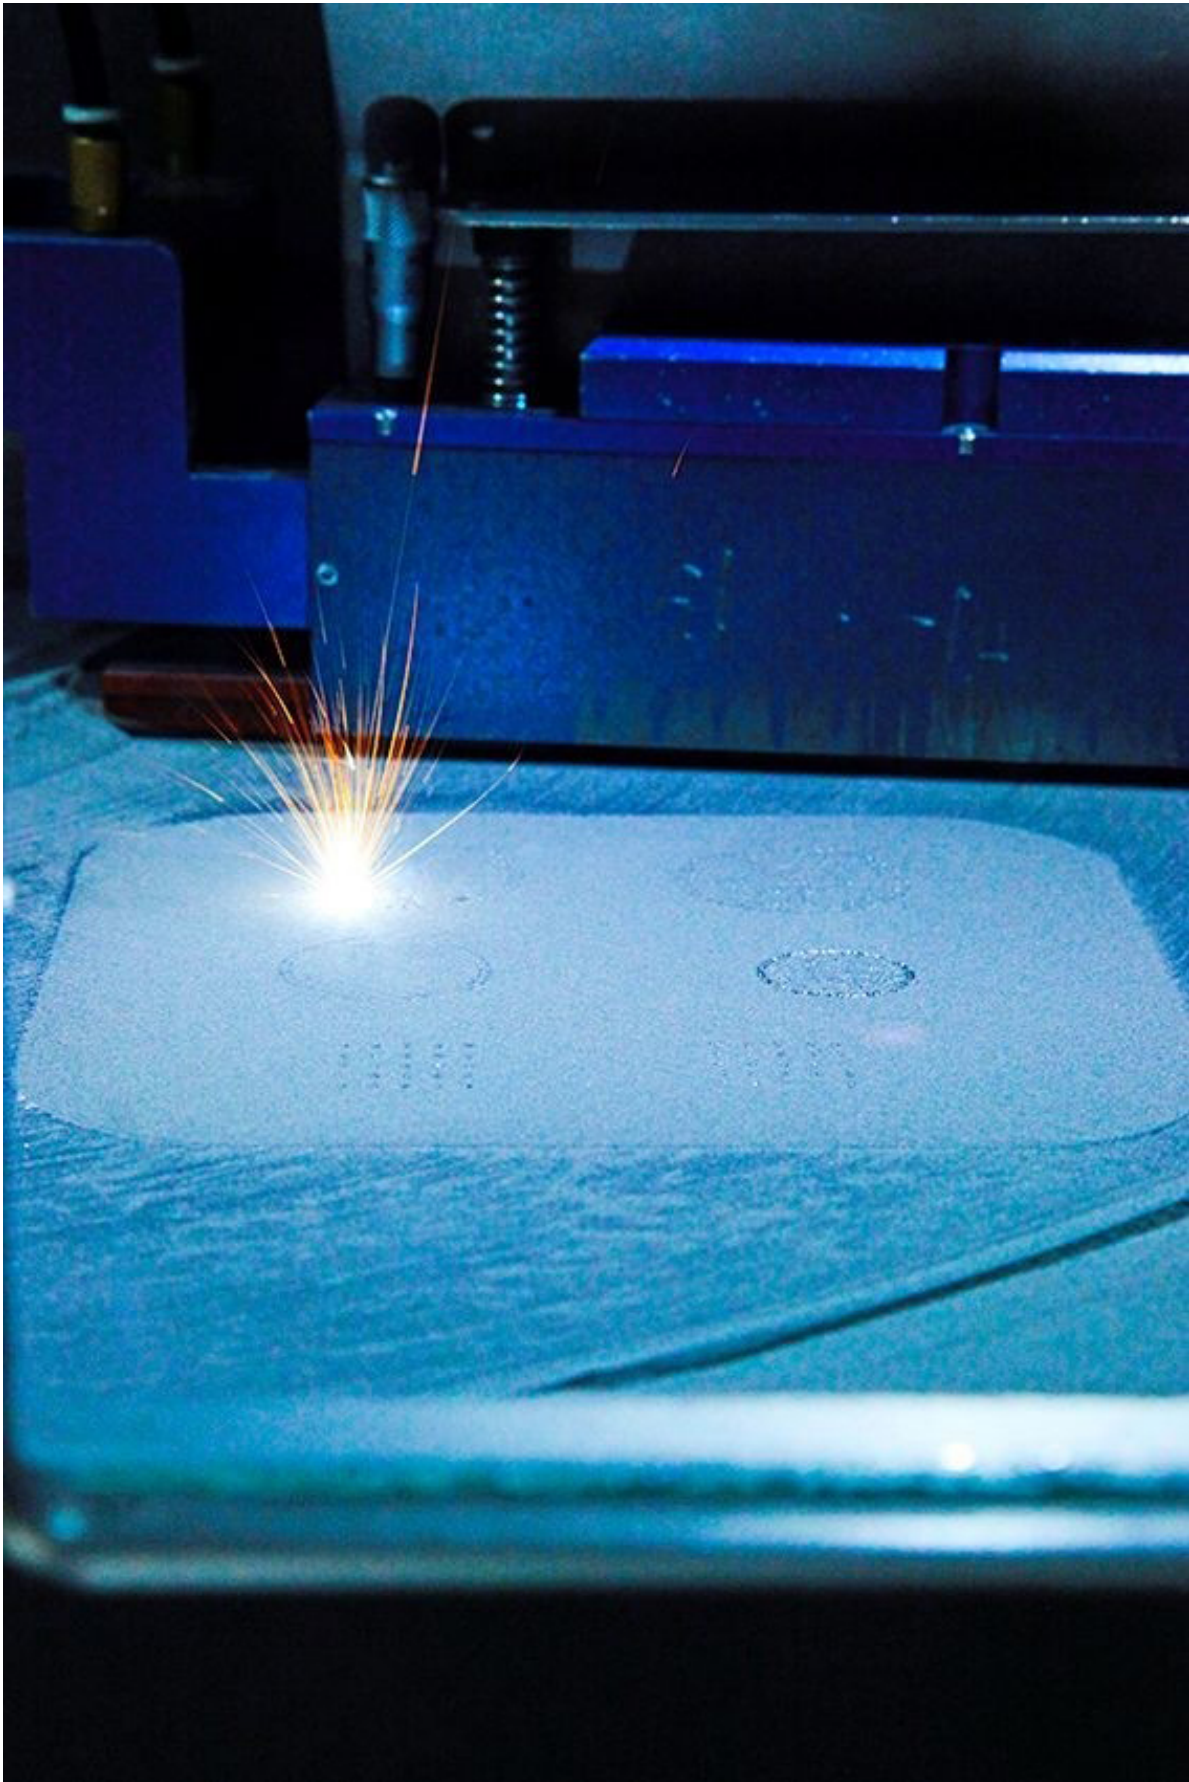

Selective laser melting process in action. Credit: Tim Sercombe/University of Western Australia

3-D printing is revolutionizing many areas of manufacturing and science. In particular, 3-D printing of metals has found novel applications in fields as diverse as customized medical implants, jet engine bearings and rapid prototyping for the automotive industry.

While many techniques can be used for 3-D printing with metals, most rely on computer-controlled melting or sintering of a metal alloy powder by a laser or electron beam. The mechanical properties of parts produced by this method have been well studied, but not enough attention has focused on their electrical properties.

Now in a paper appearing this week on the cover of the journal *Applied Physics Letters*, a team of University of Melbourne and University of Western Australia researchers report creating a resonant microwave cavity that they 3-D printed via an aluminum-silicon alloy (Al-12Si). It exhibits superconductivity when cooled below the critical temperature of aluminum (1.2 Kelvin).

"Conductivity is a measure of how easily an electrical current flows through a material, while 'superconductivity' is this measure taken to its extreme," explained Professor Michael Tobar, University of Western Australia node director of the Center for Engineered Quantum Systems. "It's an effect observed within a number of materials, characterized by the complete vanishing of any resistance to the flow of electrical current when cooled below a certain temperature."

Superconducting cavities are useful for numerous areas of physics—from quantum physics to particle accelerators. But designing superconducting cavities is becoming more complex, often involving nonstandard geometries and arrays of resonators, which makes conventional machining more challenging.

So two groups at the University of Western Australia—one led by Professor Tim Sercombe, an expert in materials and 3-D printing, and the other led by Tobar, an expert in engineered [quantum systems](#) and novel cavity designs—combined their expertise and launched a pilot study to explore the superconducting properties of 3-D printed parts.

"The physics of superconductivity is well understood, and it has been known for decades that aluminum exhibits superconductivity," Tobar said. "But the 3-D printing process relies on aluminum that's far from pure and it undergoes several processes—atomization, laser melting, furnace annealing, etc. So we wanted to explore whether a range of known superconducting metals could successfully be 3-D printed and retain their desirable electrical property."

A process known as "selective laser melting" (SLM) tends to produce a finished material with a very small grain and, for a number of metals, the critical temperature at which superconductivity occurs can be strongly linked to grain size.

"Materials such as lanthanum, molybdenum, and niobium all respond differently," Tobar said. "Grain size has been observed to both increase and decrease this [critical temperature](#). Superconductors with high critical temperatures are particularly interesting, so this 3-D printing process may have some advantage in reducing grain size. The SLM process may also enable rapid testing of new alloys with varying percentages of elements that haven't been measured before."

Beyond measuring the superconductivity, the group wanted to show that they could do something potentially useful with this technique so they decided to 3-D print a resonant microwave cavity.

"Using a device called a 'vector network analyzer,' we excited electromagnetic modes of resonance at microwave frequencies inside the cavity and measured its quality factor, aka 'Q'. This is a measure of how long injected microwaves are stored within the cavity before being lost. It's directly related to the surface resistance of the cavity walls," he explained.

Through measurements of the Q-factor, the researchers were able to indirectly determine this resistance and show that the material becomes superconducting at 1.2 Kelvin.

This result was "surprising, given the very large concentration of nonsuperconducting silicon within the alloy," Tobar noted. "It may open new possibilities for printing novel cavity configurations."

The team's results are immediately useful—people can now craft a variety of components based on their work.

"Because superconductors expel magnetic fields, magnetic shielding can be printed for experiments," Tobar said. "Also, any cavity experiment requiring a Q-factor on the order of 1 million can benefit from this technology."

For technologies requiring much sharper line-widths and higher Q-factors, according to Tobar, starting materials such as high-purity niobium powder may be ideal.

"There is relatively little in the literature regarding 3-D printed superconductors, so further work must be done to determine more

appropriate materials and how to improve the surface finish and resistance of the parts—possibly via heat treatment or chemical polishing/etching," he added.

Next steps? The team wants to attempt 3-D printing cavities with highly pure niobium powder.

"Niobium is an excellent and widely used material for superconducting cavities," Tobar said. "We anticipate that using a very pure metal powder for the SLM process will provide great results."

**More information:** "A 3D printed superconducting aluminium microwave cavity," *Applied Physics Letters*, [DOI: 10.1063/1.4958684](https://doi.org/10.1063/1.4958684)

Provided by American Institute of Physics

Citation: Exploring superconducting properties of 3-D printed parts (2016, July 18) retrieved 22 March 2023 from <https://phys.org/news/2016-07-exploring-superconducting-properties-d.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--