


Simpler, faster and cheaper: A full-filling approach to making carbon nanotubes of consistent quality

July 15 2016, by Mark Bello

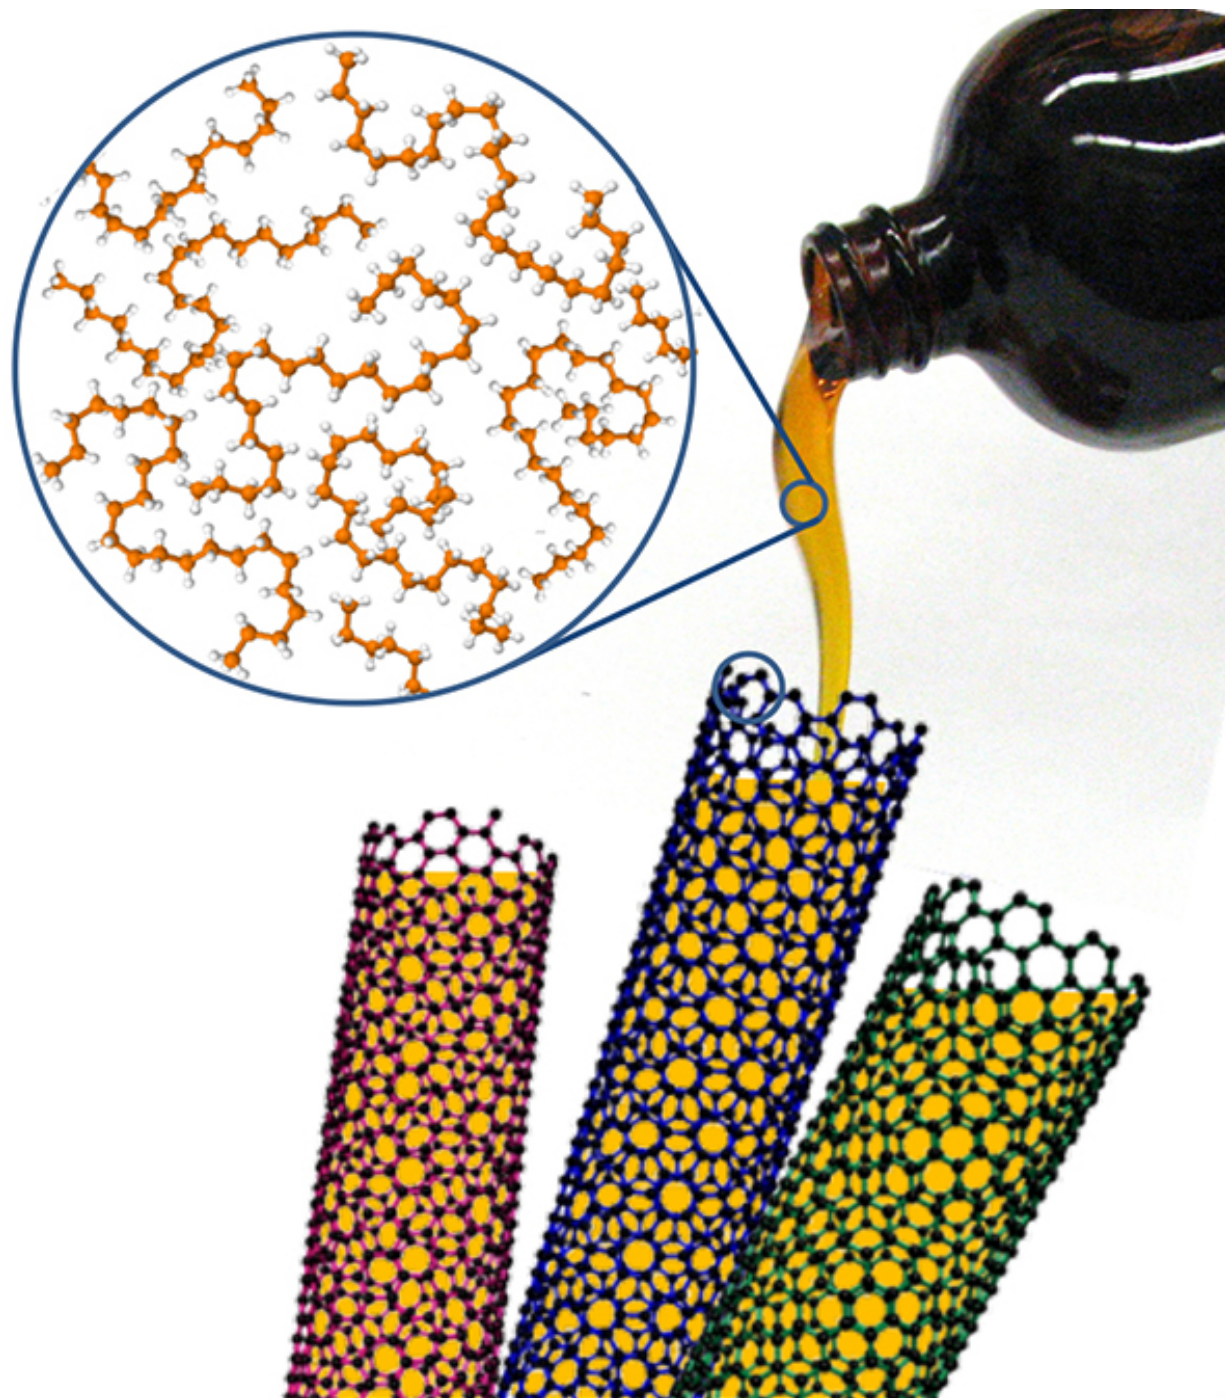

To prevent cores of single-wall carbon nanotubes from filling with water or other detrimental substances, the NIST researchers advise intentionally prefilling them with a desired chemical of known properties. Taking this step before separating and dispersing the materials, usually done in water, yields a consistently uniform collection of nanotubes, especially important for optical applications. Credit:

Fagan/NIST

Just as many of us might be resigned to clogged salt shakers or rush-hour traffic, those working to exploit the special properties of carbon nanotubes have typically shrugged their shoulders when these tiniest of cylinders fill with water during processing. But for nanotube practitioners who have reached their Popeye threshold and "can't stand no more," the National Institute of Standards and Technology (NIST) has devised a cheap, quick and effective strategy that reliably enhances the quality and consistency of the materials—important for using them effectively in applications such as new computing technologies.

To prevent filling of the cores of single-wall carbon nanotubes with water or other detrimental substances, the NIST researchers advise intentionally prefilling them with a desired chemical of known properties. Taking this step before separating and dispersing the materials, usually done in water, yields a consistently uniform collection of nanotubes. In quantity and quality, the results are superior to water-filled nanotubes, especially for optical applications such as sensors and photodetectors.

The approach opens a straightforward route for engineering the properties of single-wall carbon nanotubes—rolled up sheets of carbon atoms arranged like chicken wire or honey combs—with improved or new properties.

"This approach is so easy, inexpensive and broadly useful that I can't think of a reason not to use it," said NIST chemical engineer Jeffrey Fagan.

In their proof-of-concept experiments, the NIST team inserted more

than 20 different compounds into an assortment of single-wall carbon nanotubes with an interior diameter that ranged from more than 2 down to about 0.5 nanometers. Led by visiting researcher Jochen Campo, the scientists tested their strategy by using hydrocarbons called alkanes as fillers.

The alkanes, which include such familiar compounds as propane and butane, served to render the nanotube interiors unreactive. In other words, the alkane-filled nanotubes behaved almost as if they were empty—precisely the goal of Campo, Fagan and colleagues.

Compared with nanotubes filled with water and possibly ions, acids and other unwanted chemicals encountered during processing, empty nanotubes possess far superior properties. For example, when stimulated by light, empty carbon nanotubes fluoresce far brighter and with sharper signals.

Yet, "spontaneous ingestion" of water or other solvents by the nanotubes during processing is an "endemic but often neglected phenomenon with strong implications for the development of nanotube applications," the NIST team wrote in a recent article in *Nanoscale Horizons*.

Perhaps because of the additional cost and effort required to filter out and gather nanotubes, researchers tend to tolerate mixed batches of unfilled (empty) and mostly filled single-wall carbon nanotubes. Separating unfilled nanotubes from these mixtures requires expensive ultracentrifuge equipment and, even then, the yield is only about 10 percent, Campo estimates.

"If your goal is to use nanotubes for electronic circuits, for example, or for fluorescent anti-cancer image contrast agents, then you require much greater quantities of materials of consistent composition and quality," Campo explained, who was exploring these applications while doing

postdoctoral research at the University of Antwerp. "This particular need inspired development of the new prefilling method by asking the question, can we put some passive chemical into the nanotube instead to keep the water out."

From the very first simple experiments, the answer was yes. And the benefits can be significant. In fluorescence experiments, alkane-filled nanotubes emitted signals two to three times stronger than those emitted by water-filled nanotubes. Performance approached that of empty nanotubes—the gold standard for these comparisons.

As important, the NIST-developed prefilling strategy is controllable, versatile and easily incorporated into existing methods for processing single-wall carbon nanotubes, according to the researchers.

More information: J. Campo et al, Enhancing single-wall carbon nanotube properties through controlled endohedral filling, *Nanoscale Horiz.* (2016). [DOI: 10.1039/C6NH00062B](https://doi.org/10.1039/C6NH00062B)

Provided by National Institute of Standards and Technology

Citation: Simpler, faster and cheaper: A full-filling approach to making carbon nanotubes of consistent quality (2016, July 15) retrieved 26 April 2024 from <https://phys.org/news/2016-07-simpler-faster-cheaper-full-filling-approach.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.