


New analysis finds way to safely conduct heat from graphene to biological tissues

September 23 2016, by Jennifer Chu

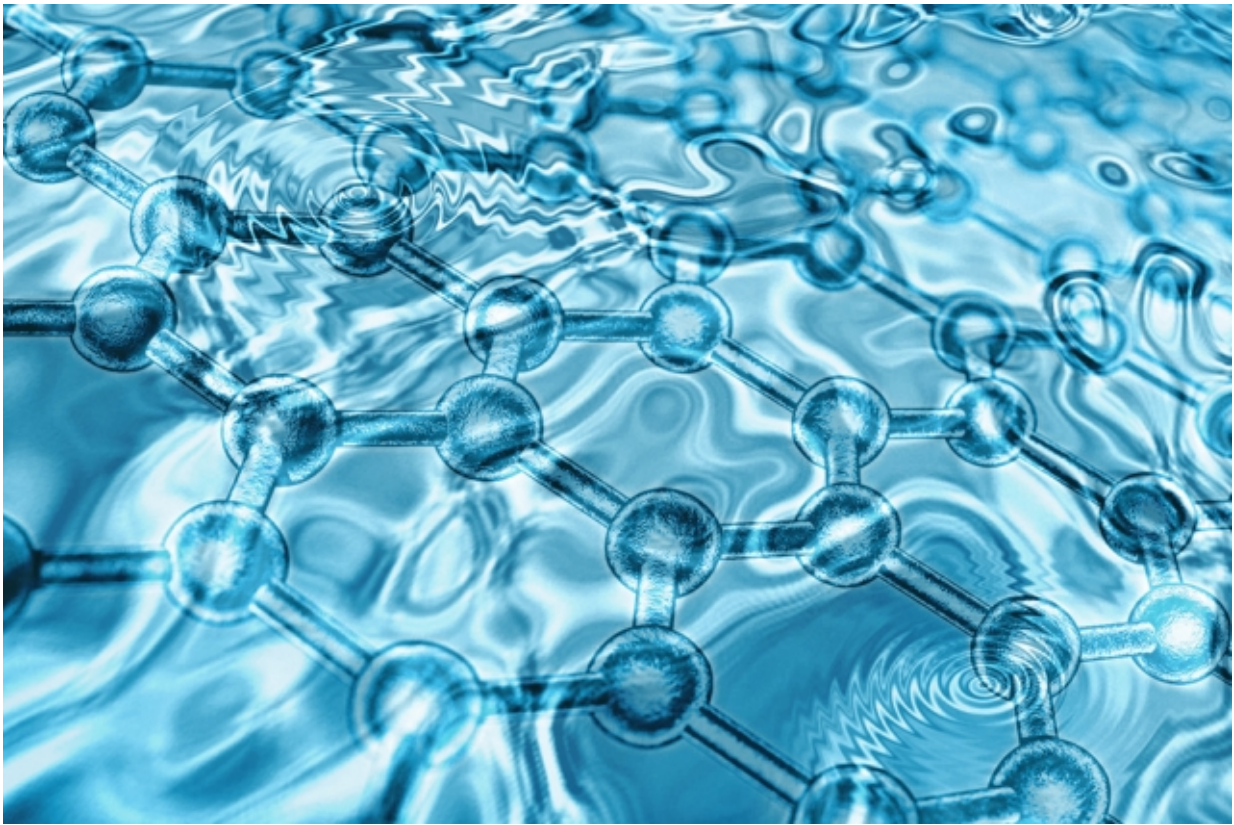

This computational illustration shows a graphene network structure below a layer of water. Credit: Zhao Qin

In the future, our health may be monitored and maintained by tiny sensors and drug dispensers, deployed within the body and made from

graphene—one of the strongest, lightest materials in the world. Graphene is composed of a single sheet of carbon atoms, linked together like razor-thin chicken wire, and its properties may be tuned in countless ways, making it a versatile material for tiny, next-generation implants.

But [graphene](#) is incredibly stiff, whereas biological tissue is soft. Because of this, any power applied to operate a graphene implant could precipitously [heat](#) up and fry surrounding cells.

Now, engineers from MIT and Tsinghua University in Beijing have precisely simulated how electrical power may generate heat between a single layer of graphene and a simple [cell membrane](#). While direct contact between the two layers inevitably overheats and kills the cell, the researchers found they could prevent this effect with a very thin, in-between layer of water.

By tuning the thickness of this intermediate water layer, the researchers could carefully control the amount of heat transferred between graphene and biological tissue. They also identified the critical power to apply to the graphene layer, without frying the cell membrane. The results are published today in the journal *Nature Communications*.

Co-author Zhao Qin, a research scientist in MIT's Department of Civil and Environmental Engineering (CEE), says the team's simulations may help guide the development of graphene implants and their optimal power requirements.

"We've provided a lot of insight, like what's the critical power we can accept that will not fry the cell," Qin says. "But sometimes we might want to intentionally increase the temperature, because for some biomedical applications, we want to kill cells like cancer cells. This work can also be used as guidance [for those efforts.]"

Qin's co-authors include Markus Buehler, head of CEE and the McAfee Professor of Engineering, along with Yanlei Wang and Zhiping Xu of Tsinghua University.

Sandwich model

Typically, heat travels between two materials via vibrations in each material's atoms. These atoms are always vibrating, at frequencies that depend on the properties of their materials. As a surface heats up, its atoms vibrate even more, causing collisions with other atoms and transferring heat in the process.

The researchers sought to accurately characterize the way heat travels, at the level of individual atoms, between graphene and biological tissue. To do this, they considered the simplest interface, comprising a small, 500-nanometer-square sheet of graphene and a simple cell membrane, separated by a thin layer of water.

"In the body, water is everywhere, and the outer surface of membranes will always like to interact with water, so you cannot totally remove it," Qin says. "So we came up with a sandwich model for graphene, water, and membrane, that is a crystal clear system for seeing the thermal conductance between these two materials."

Qin's colleagues at Tsinghua University had previously developed a model to precisely simulate the interactions between atoms in graphene and water, using density functional theory—a computational modeling technique that considers the structure of an atom's electrons in determining how that atom will interact with other atoms.

However, to apply this modeling technique to the group's sandwich model, which comprised about half a million atoms, would have required an incredible amount of computational power. Instead, Qin and his

colleagues used classical molecular dynamics—a mathematical technique based on a "force field" potential function, or a simplified version of the interactions between [atoms](#)—that enabled them to efficiently calculate interactions within larger atomic systems.

The researchers then built an atom-level sandwich model of graphene, water, and a cell membrane, based on the group's simplified force field. They carried out molecular dynamics simulations in which they changed the amount of power applied to the graphene, as well as the thickness of the intermediate water layer, and observed the amount of heat that carried over from the graphene to the cell membrane.

Watery crystals

Because the stiffness of graphene and [biological tissue](#) is so different, Qin and his colleagues expected that heat would conduct rather poorly between the two materials, building up steeply in the graphene before flooding and overheating the cell membrane. However, the intermediate water layer helped dissipate this heat, easing its conduction and preventing a temperature spike in the cell membrane.

Looking more closely at the interactions within this interface, the researchers made a surprising discovery: Within the sandwich model, the water, pressed against graphene's chicken-wire pattern, morphed into a similar crystal-like structure.

"Graphene's lattice acts like a template to guide the water to form network structures," Qin explains. "The water acts more like a solid material and makes the stiffness transition from graphene and membrane less abrupt. We think this helps heat to conduct from graphene to the membrane side."

The group varied the thickness of the intermediate water layer in

simulations, and found that a 1-nanometer-wide layer of water helped to dissipate heat very effectively. In terms of the power applied to the system, they calculated that about a megawatt of power per meter squared, applied in tiny, microsecond bursts, was the most power that could be applied to the interface without overheating the cell membrane.

Qin says going forward, implant designers can use the group's model and simulations to determine the critical power requirements for graphene devices of different dimensions. As for how they might practically control the thickness of the intermediate water layer, he says graphene's surface may be modified to attract a particular number of water molecules.

"I think graphene provides a very promising candidate for implantable devices," Qin says. "Our calculations can provide knowledge for designing these devices in the future, for specific applications, like sensors, monitors, and other biomedical applications."

More information: Yanlei Wang et al. Intercalated water layers promote thermal dissipation at bio–nano interfaces, *Nature Communications* (2016). [DOI: 10.1038/ncomms12854](https://doi.org/10.1038/ncomms12854)

This story is republished courtesy of MIT News (web.mit.edu/newsoffice/), a popular site that covers news about MIT research, innovation and teaching.

Provided by Massachusetts Institute of Technology

Citation: New analysis finds way to safely conduct heat from graphene to biological tissues (2016, September 23) retrieved 2 May 2024 from <https://phys.org/news/2016-09-analysis-safely-graphene-biological-tissues.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.