


# Researchers report new thermoelectric material with high power factors

November 14 2016

---

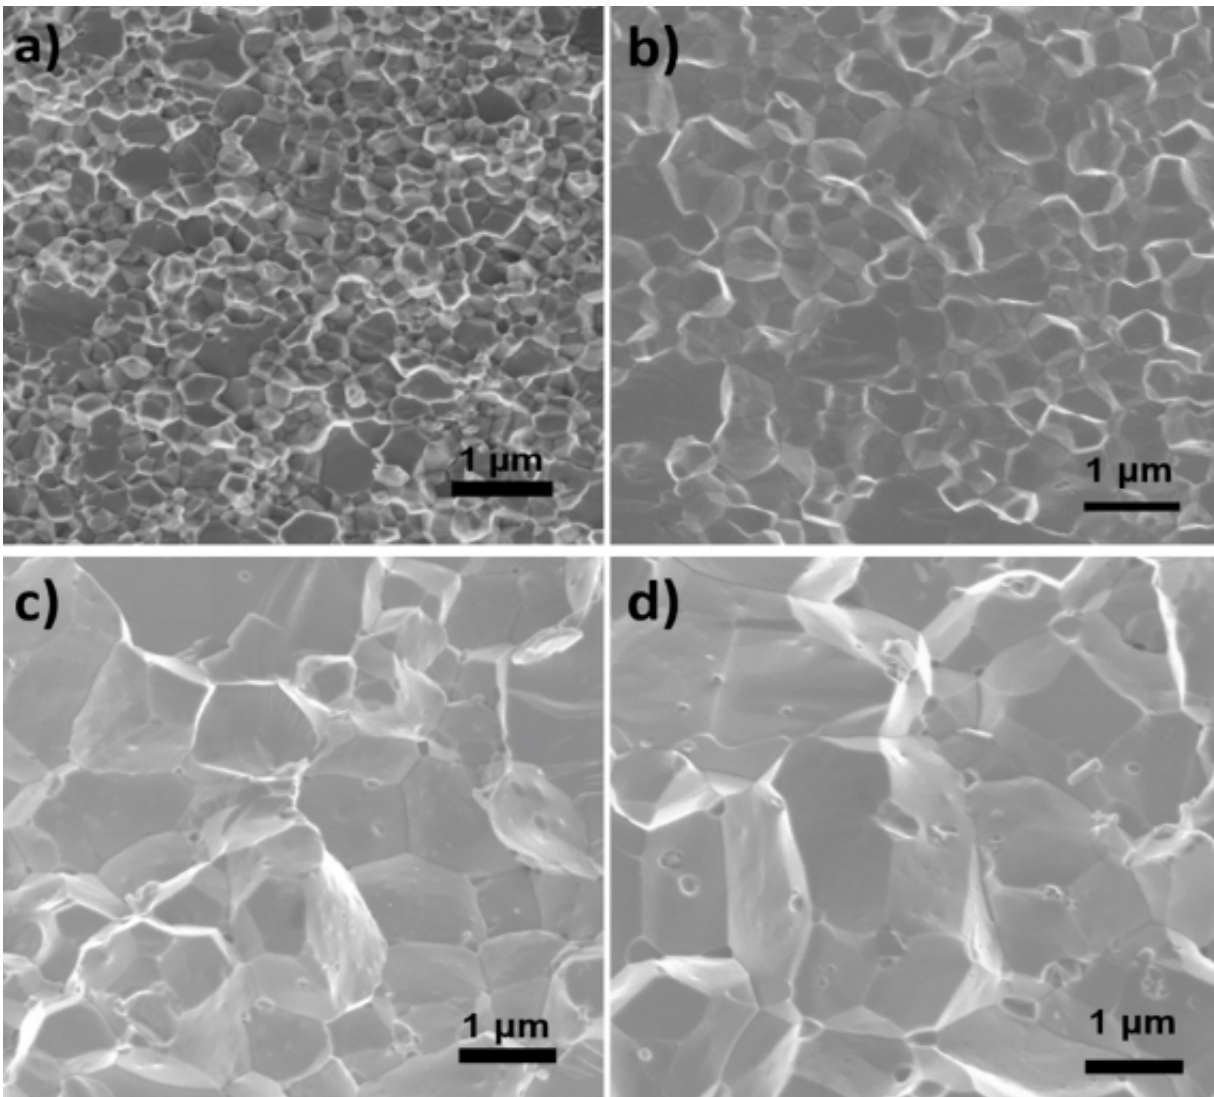

SEM images of the material hot-pressed at a) 1123 K, b) 1173 K, c) 1273 K, and d) 1373 K. Credit: University of Houston

With energy conservation expected to play a growing role in managing global demand, materials and methods that make better use of existing sources of energy have become increasingly important.

Researchers reported this week in the *Proceedings of the National Academy of Sciences* that they have demonstrated a step forward in converting waste heat - from industrial smokestacks, [power generating plants](#) or even automobile tailpipes - into electricity.

The work, using a thermoelectric compound composed of niobium, titanium, iron and antimony, succeeded in raising the material's [power output](#) density dramatically by using a very hot pressing temperature - up to 1373 Kelvin, or about 2,000 degrees Fahrenheit - to create the material.

"The majority of industrial energy input is lost as waste heat," the researchers wrote. "Converting some of the waste heat into useful electrical [power](#) will lead to the reduction of fossil fuel consumption and CO2 emission."

Thermoelectric materials produce electricity by exploiting the flow of heat current from a warmer area to a cooler area, and their efficiency is calculated as the measure of how well the material converts heat - often waste heat generated by power plants or other industrial processes - into power. For example, a material that takes in 100 watts of heat and produces 10 watts of electricity has an efficiency rate of 10 percent.

That's the traditional way of considering thermoelectric materials, said Zhifeng Ren, MD Anderson Professor of Physics at the University of Houston and lead author of the paper. But having a relatively high conversion efficiency doesn't guarantee a high power output, which

measures the amount of power produced by the material rather than the rate of the conversion.

Because [waste heat](#) is an abundant - and free - source of fuel, the conversion rate is less important than the total amount of power that can be produced, said Ren, who is also a principal investigator at the Texas Center for Superconductivity at UH. "In the past, that has not been emphasized."

In addition to Ren, researchers involved in the project include Ran He, Jun Mao, Qing Jie, Jing Shuai, Hee Seok Kim, Yuan Liu and Paul C.W. Chu, all of UH; Daniel Kraemer, Lingping Zeng and Gang Chen of the Massachusetts Institute of Technology; Yucheng Lan of Morgan State University, and Chunhua Li and David Broido of Boston College.

The researchers tweaked a compound made up of niobium, iron and antimony, replacing between 4 and 5 percent of the niobium with titanium. Processing the new compound at a variety of high temperatures suggested that a very high temperature - 1373 Kelvin - resulted in a material with an unusually high [power factor](#).

"For most [thermoelectric materials](#), a power factor of 40 is good," Ren said. "Many have a power factor of 20 or 30."

The new material has a power factor of 106 at room temperature, and researchers were able to demonstrate an output power density of 22 watts per square centimeter, far higher than the 5 to 6 watts typically produced, he said.

"This aspect of thermoelectrics needs to be emphasized," he said. "You can't just look at the efficiency. You have to look also at the power factor and power output."

**More information:** Achieving high power factor and output power density in p-type half-Heuslers  $\text{Nb}_{1-x}\text{Ti}_x\text{FeSb}$ , *Proceedings of the National Academy of Sciences*,

[www.pnas.org/cgi/doi/10.1073/pnas.1617663113](http://www.pnas.org/cgi/doi/10.1073/pnas.1617663113)

Provided by University of Houston

Citation: Researchers report new thermoelectric material with high power factors (2016, November 14) retrieved 26 April 2024 from <https://phys.org/news/2016-11-thermoelectric-material-high-power-factors.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--