

# World's first gas sensor to apply a new principle for graphene use

December 5 2016

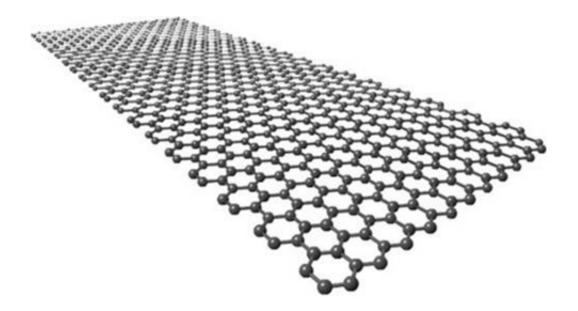


Figure 1:Arrangement of carbon atoms in a sheet of graphene. Credit: Fujitsu

Fujitsu Laboratories today announced the world's first successful development of an exquisitely sensitive gas sensor based on a new principle that takes advantage of graphene, a material in which carbon atoms are arranged in a sheet one atom thick. This development paves the way for compact instruments that can measure specific gas components with speed and sensitivity, for detecting atmospheric pollution or testing for organically derived gases in a person's breath. Fujitsu Laboratories has developed a gas sensor that operates on a new principle, in which the gate part of a silicon transistor is replaced by



graphene. This sensor can detect concentrations lower than tens of parts per billion (ppb) of nitrogen dioxide (NO2) and ammonia (NH3); with nitrogen dioxide in particular, sensitivity has improved more than tenfold, to less than 1 ppb. This technology is expected to enable realtime measurements of air quality, which may have taken tens of hours depending upon the gas being measured. It will also simplify detection of gas components in breath, which can be used to quickly discover lifestyle diseases.

Details of this technology are to be presented at the 2016 IEEE International Electron Devices Meeting, which opened December 3 in San Francisco.

# Background

Graphene, a two-dimensional sheet of carbon just one atom thick, has remarkable electrical properties far beyond the limits of very-large-scale integration (VLSI) circuitry using silicon, which is reaching the limits of miniaturization. This has garnered attention as a material for nextgeneration electronic devices. Fujitsu Laboratories is developing ultrafast, low-power transistors and revolutionary devices using graphene, and is also developing functional devices such as highsensitivity sensors using graphene.

Gas sensors have been proposed as one kind of functional device that can be made using graphene. The hope is that it will allow for sensors that can measure certain gas components with high sensitivity (on a ppb scale) for detecting air pollution or gases contained in human breath. While it is possible to perform extremely sensitive measurements using specialized equipment, such as gas chromatographs, this equipment is large and the measurements take time. There are semiconductor gas sensors that are compact and work in real time, but these generally operate at a sensitivity on the order of parts per million, so their



performance is not sufficient for detecting certain gas components. There have been proposals for sensors that use graphene that would work by detecting the change in resistance across the graphene to which a gas adheres, but resistance only varies by several percent in the presence of 1-parts per million (ppm) concentrations of gases, which does not reach the level needed for real-world use.

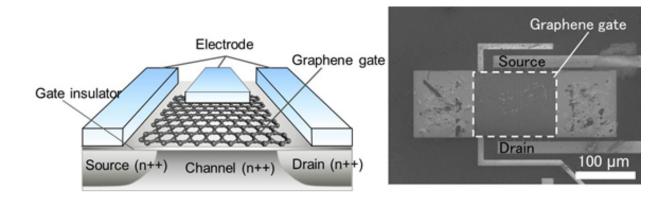


Figure 2: The newly developed graphene gate sensor, a schematic (left), and a scanning electron microscope image (right) of the produced sensor. Credit: Fujitsu

#### About the Technology

Fujitsu Laboratories has now developed a <u>gas sensor</u> based on a new principle. In such a sensor, a graphene sheet with just a single layer of atoms replaces the gate part of a conventional <u>silicon transistor</u> (Figure 2). When a gas molecule adheres to the graphene, the graphene's work function changes, and the result is that there is a major change in the switching characteristics of the silicon transistor. It is this principle that enables a gas to be detected. When the gas molecule separates from the graphene, the graphene returns to its original state.



A sensor based on this principle has been created that measures a few tens of ppb of ammonia and less than 1 ppb of NO2 in a nitrogen environment. Among the gases expected to be found in analyses of the air or human breath, the results of tests have demonstrated that it reacts only to NO2 and NH3, meaning that it can detect only specific gases (Figure 3).

This technology's sensitivity to NO2 is an order of magnitude greater than conventional resistivity-based graphene sensors, at less than 1 ppb, and the commercially available electrochemical <u>sensors</u>, which have sensitivity of over tens of ppb.

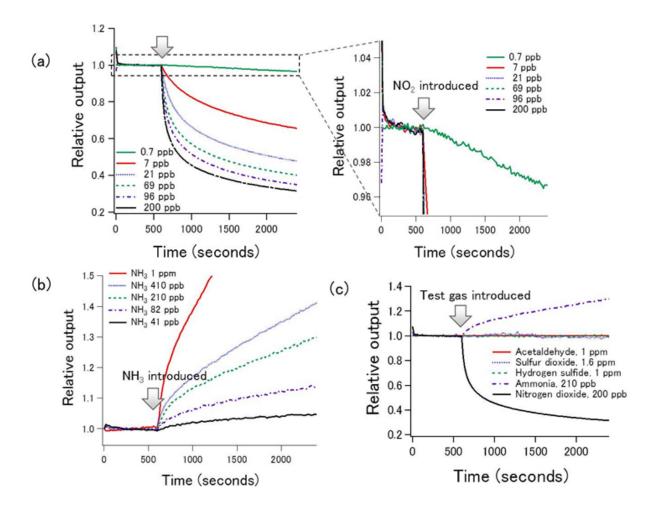




Figure 3 a: Responsiveness of graphene-gate sensor's output to NO2, left: a magnified figure b: Responsiveness to ammonia. c: Responsiveness to various gases. Credit: Fujitsu

### Results

This sensor is compact, with a detection area of only a few hundred micrometers, but could be made even smaller (less than one micrometer). Sensitivity is greater than existing technologies, and because its mechanism does not rely on chemical reactions, the sensor returns to its original state through methods such as the application of heat to the device. This sensor could be used in a compact device that could measure NO2 anywhere, in real time, at the environmental benchmark level of sensitivity of 40-60 ppb, which is an index of air pollution.

Fujitsu Laboratories has tested the validity of the principle behind the graphene gate sensor, and aims to put it into practical use as an environmental sensor after verifying its characteristics and studying its durability. The company also plans to find ways to detect gases other than <u>nitrogen dioxide</u> and ammonia by combining <u>graphene</u> with other molecules. Furthermore, by combining this sensor with a sensor announced in April 2016 that can measure ammonia with a high degree of <u>sensitivity</u>, Fujitsu Laboratories plans to develop a highly sensitive and portable sensor that can be used as conveniently as a thermometer to measure gases in <u>human breath</u> for early detection of lifestyle diseases.

## Provided by Fujitsu

Citation: World's first gas sensor to apply a new principle for graphene use (2016, December 5)



retrieved 2 May 2024 from <u>https://phys.org/news/2016-12-world-gas-sensor-principle-graphene.html</u>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.