


In the fast lane—conductive electrodes are key to fast-charging batteries

July 10 2017

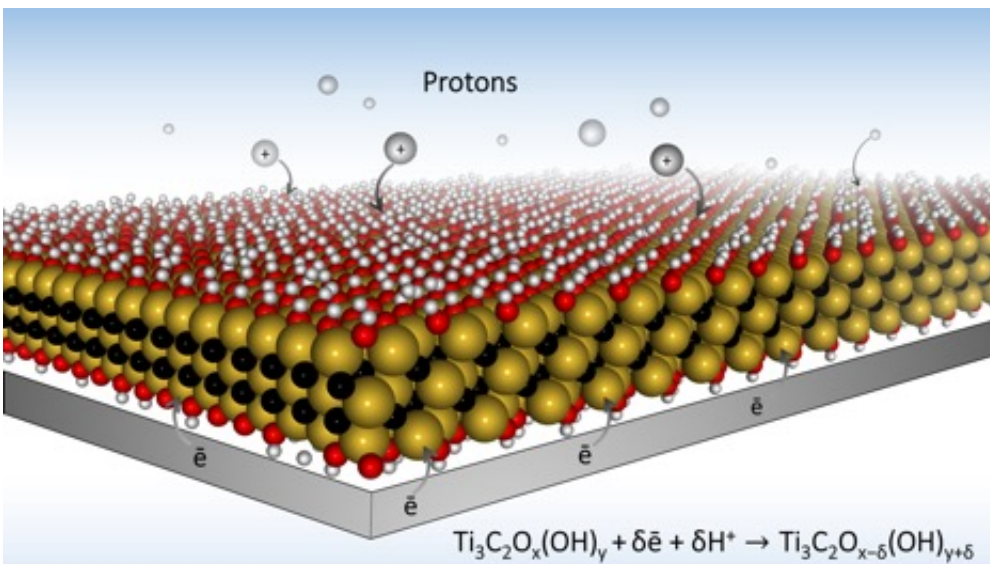

Drexel University researchers have developed two new electrode designs, using MXene material, that will allow batteries to charge much faster. The key is a microporous design that allows ions to quickly make their way to redox active sites. Credit: Drexel University

Can you imagine fully charging your cell phone in just a few seconds? Researchers in Drexel University's College of Engineering can, and they took a big step toward making it a reality with their recent work unveiling of a new battery electrode design in the journal *Nature Energy*.

The team, led by Yury Gogotsi, PhD, Distinguished University and Bach

professor in Drexel's College of Engineering, in the Department of Materials Science and Engineering, created the new electrode designs from a highly conductive, two-dimensional material called MXene. Their design could make [energy storage devices](#) like batteries, viewed as the plodding tanker truck of energy storage technology, just as fast as the speedy supercapacitors that are used to provide energy in a pinch—often as a battery back-up or to provide quick bursts of energy for things like camera flashes.

"This paper refutes the widely accepted dogma that chemical charge storage, used in batteries and pseudocapacitors, is always much slower than physical storage used in electrical double-layer capacitors, also known as supercapacitors," Gogotsi said. "We demonstrate charging of thin MXene electrodes in tens of milliseconds. This is enabled by very high electronic conductivity of MXene. This paves the way to development of ultrafast energy storage devices than can be charged and discharged within seconds, but store much more energy than conventional supercapacitors."

The key to faster charging energy storage devices is in the electrode design. Electrodes are essential components of batteries, through which energy is stored during charging and from which it is disbursed to power our devices. So the ideal design for these components would be one that allows them to be quickly charged and store more energy.

To store more energy, the materials should have places to put it. Electrode materials in batteries offer ports for charge to be stored. In electrochemistry, these ports, called "redox active sites" are the places that hold an electrical charge when each ion is delivered. So if the electrode material has more ports, it can store more energy—which equates to a battery with more "juice."

Collaborators Patrice Simon, PhD, and Zifeng Lin, from Université Paul

Sabatier in France, produced a hydrogel electrode design with more redox active sites, which allows it to store as much charge for its volume as a battery. This measure of capacity, termed "volumetric performance," is an important metric for judging the utility of any [energy](#) storage device.

To make those plentiful hydrogel electrode ports even more attractive to ion traffic, the Drexel-led team, including researchers Maria Lukatskaya, PhD, Sankalp Kota, a graduate student in Drexel's MAX/MXene Research Group led by Michel Barsoum, PhD, distinguished professor in the College of Engineering; and Mengquiang Zhao, PhD, designed electrode architectures with open macroporosity—many small openings—to make each redox active sites in the MXene material readily accessible to ions.

"In traditional batteries and supercapacitors, ions have a tortuous path toward charge storage ports, which not only slows down everything, but it also creates a situation where very few ions actually reach their destination at fast charging rates," said Lukatskaya, the first author on the paper, who conducted the research as part of the A.J. Drexel Nanomaterials Institute. "The ideal electrode architecture would be something like ions moving to the ports via multi-lane, high-speed 'highways,' instead of taking single-lane roads. Our macroporous electrode design achieves this goal, which allows for rapid charging—on the order of a few seconds or less."

The overarching benefit of using MXene as the material for the [electrode](#) design is its conductivity. Materials that allow for rapid flow of an electrical current, like aluminum and copper, are often used in electric cables. MXenes are conductive, just like metals, so not only do ions have a wide-open path to a number of [storage](#) ports, but they can also move very quickly to meet electrons there. Mikhael Levi, PhD, and Netanel Shpigel, research collaborators from Bar-Ilan University in

Israel, helped the Drexel group maximize the number of the ports accessible to ions in MXene electrodes.

Use in battery electrodes is just the latest in a series of developments with the [MXene material that was discovered by researchers](#) in Drexel's Department of Materials Science and Engineering in 2011. Since then, researchers have been testing them in a variety of applications from [energy storage](#) to electromagnetic radiation shielding, and water filtering. This latest development is significant in particular because it addresses one of the primary problems hindering the expansion of the electric vehicle market and that has been lurking on the horizon for mobile devices.

"If we start using low-dimensional and electronically conducting [materials](#) as battery electrodes, we can make batteries working much, much faster than today," Gogotsi said. "Eventually, appreciation of this fact will lead us to car, laptop and cell-phone batteries capable of charging at much higher rates—seconds or minutes rather than hours."

More information: Maria R. Lukatskaya et al, Ultra-high-rate pseudocapacitive energy storage in two-dimensional transition metal carbides, *Nature Energy* (2017). [DOI: 10.1038/nenergy.2017.105](https://doi.org/10.1038/nenergy.2017.105)

Provided by Drexel University

Citation: In the fast lane—conductive electrodes are key to fast-charging batteries (2017, July 10) retrieved 18 April 2024 from <https://phys.org/news/2017-07-fast-laneconductive-electrodes-key-fast-charging.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.