


Researchers develop model for lighter armor

August 17 2017

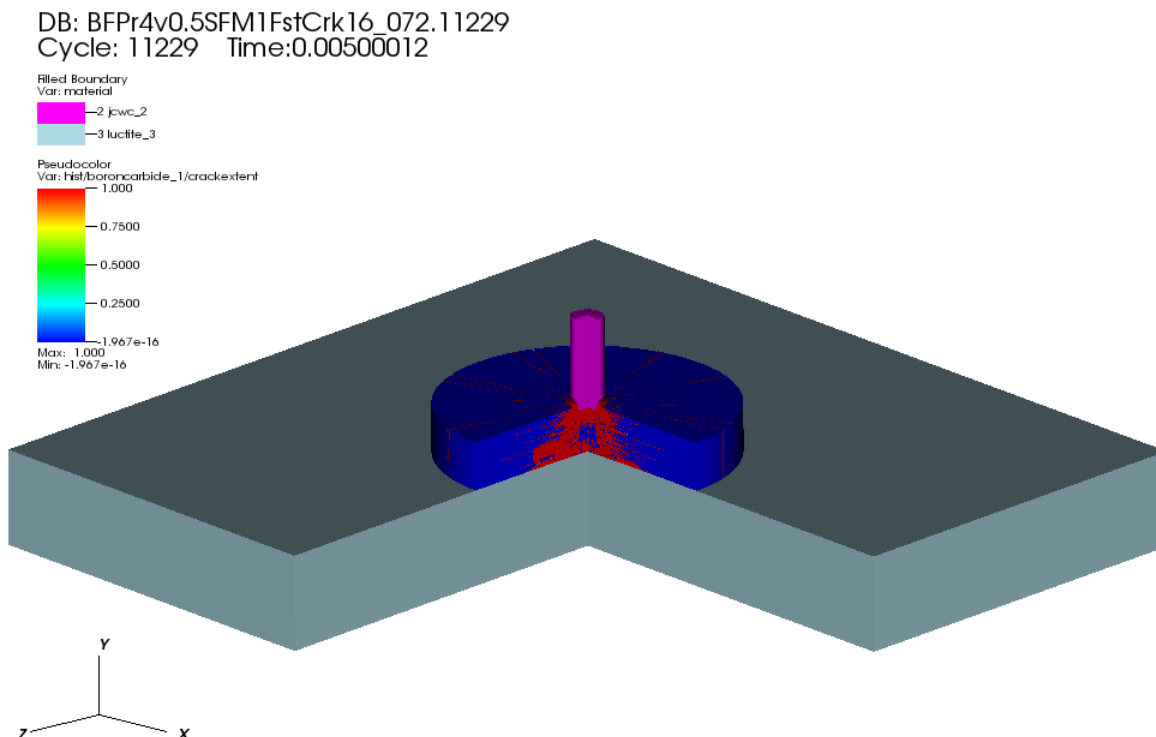

A simulation of a laboratory projectile impacting ceramic backed by polycarbonate showing damage in the ceramic. Credit: US Army Research Laboratory

The US Army Research Laboratory is working on developing new lightweight ceramic materials that resist fracture, and has teamed with researchers from the University of Florida to better understand exactly

how these materials, which are suited for Soldier personal protection and Army systems, fracture, and how they can be further improved. They are focusing on failure through cracking; the material eventually disintegrates into a granular-like state through a process called comminution.


"While various ceramic [materials](#) possess high hardness, they fail easily when pulled apart. That is, when subjected to tensile forces. The amount of tension that these materials can withstand before failure, is a small fraction of the compression they can withstand. As a result, high velocity impact of bullets and fragments causes extensive cracking and fragmentation of the material, reducing its ability to fully utilize its superior hardness to resist complex stress states generated by the impact event," explained Dr. Sikhanda Satapathy, of ARL's Soldier Protection Sciences Branch.

Traditionally, the relationship between the granular material's ability to withstand compression and its ability to resist shearing deformation, which causes material to change shape has been described by the Mohr-Coulomb [model](#). This model approximates the material's resistance to shearing deformation (shear strength) as a linear function of applied pressure. In reality, the shear strength does not increase linearly with pressure and will saturate at high pressures.

The UF researchers developed a new model that describes the granular material response more accurately by studying the stress state at which a variety of ceramics fail as reported in the literature by various research teams.

The ARL and the UF team collaborated to employ this improved granular response model in conjunction with a dynamic cavity expansion modeling framework to capture the response of ceramics to the complex impact-induced stress state that includes compression, tension and shear.

The dynamic cavity expansion modeling framework uses the pressure required to expand a cavity in an intact material to characterize its ability to resist deep penetration. This pressure, of course, is dependent on how the material responds to compression, tension and shear forces. Due to the applicability of this new model to a broad class of ceramics, the need for expensive experiments to characterize penetration response is significantly reduced. The new penetration model improves the understanding of how brittle ceramic responds to high impact stress by fracturing and comminuting to granular like material, and increases modeling ability of penetration events.

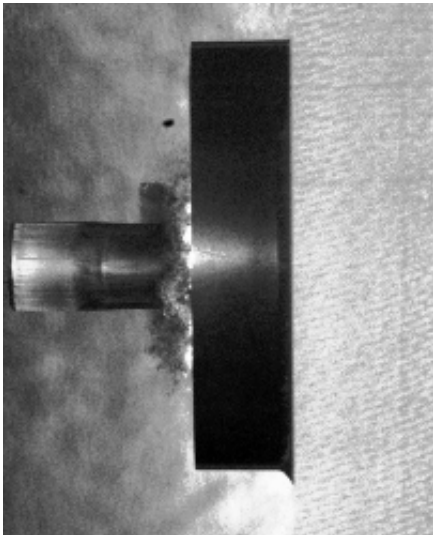


A side image of a laboratory projectile impacting a ceramic disk backed by polycarbonate captured using high speed cameras. Credit: US Army Research Laboratory

The improved model has been shown to better predict the resistance of a wide range of ceramic targets when shot at by a long-rod projectiles at velocities up to 3km/s. The important material parameters for penetration performance of a ceramic target have been identified

through this collaborative effort, which will guide how the failure processes in ceramic can be controlled through improved material design or through a multi-materials systems approach.

"Understanding the mechanics of material response to projectile impact generated stress conditions is crucial in this research," Satapathy said. The research will appear in the *International Journal of Solids and Structures*.

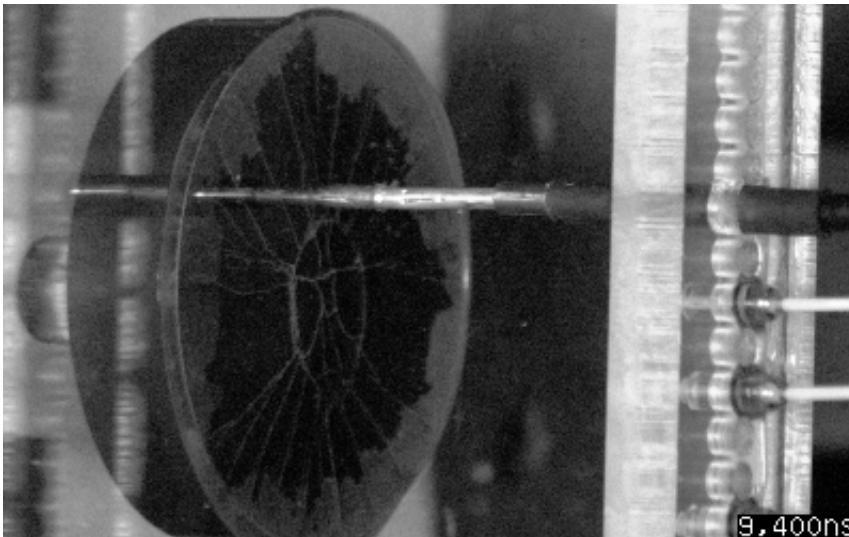

The rear surface of the ceramic disk viewed through the polycarbonate backer showing the failure of a ceramic disk as a result of impact by a laboratory projectile. Credit: US Army Research Laboratory

More information: Salil Bavdekar et al, An improved dynamic expanding cavity model for high-pressure and high-strain rate response of ceramics, *International Journal of Solids and Structures* (2017). [DOI: 10.1016/j.ijsolstr.2017.07.014](https://doi.org/10.1016/j.ijsolstr.2017.07.014)

Provided by U.S. Army Research Laboratory

Citation: Researchers develop model for lighter armor (2017, August 17) retrieved 5 May 2024 from <https://phys.org/news/2017-08-lighter-armor.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.