


# Researchers create single-crystal perovskite solar cells

August 29 2017

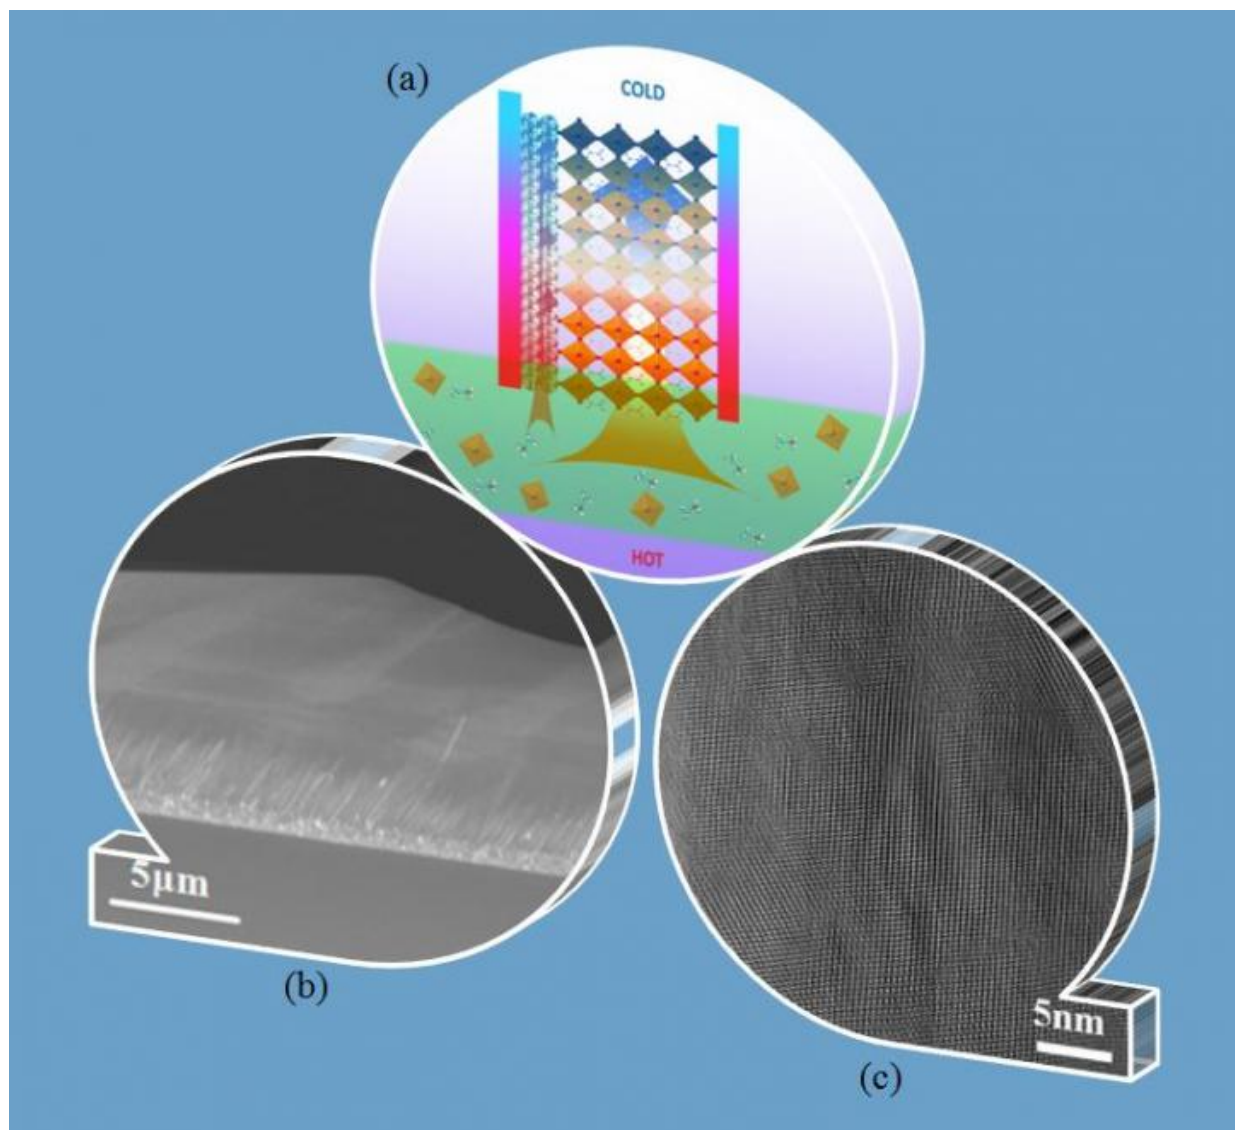

Single crystalline  $\text{CH}_3\text{NH}_3\text{PbI}_3$  self-grown on FTO/ $\text{TiO}_2$  substrate. (a) Schematic self-growth via temperature gradient and capillary effect; (b) cross-

sectional SEM image of  $\text{CH}_3\text{NH}_3\text{PbI}_3$  on FTO/ $\text{TiO}_2$ ; (c) high resolution TEM image of single crystalline  $\text{CH}_3\text{NH}_3\text{PbI}_3$ . Credit: Science China Press

Photovoltaic conversion is regarded as the ultimate solution to the growing demand for energy, yet traditional silicon-based solar cells are expensive to produce, and production itself involves intensive energy consumption. Emerging hybrid organic-inorganic solar cells based on perovskite  $\text{CH}_3\text{NH}_3\text{PbI}_3$ , on the other hand, are not only inexpensive to process but also flexible, and thus are widely pursued as one of the most promising next-generation photovoltaic conversion technologies.

Since first reported in 2009, the [photovoltaic](#) conversion efficiency of perovskite solar cells has increased spectacularly from 3.81 percent to 22.1 percent in just seven years, and this unprecedented rise has fueled worldwide pursuit for new efficiency records. Nevertheless, in the last two years, the pace of [perovskite solar cell](#) efficiency gains has slowed considerably despite the distance from the projected theoretical limit of 31 percent. Therefore, researchers are exploring new strategies to further enhance perovskite solar cell performance.

The current perovskite solar cells are based on polycrystalline  $\text{CH}_3\text{NH}_3\text{PbI}_3$  films, and thus inevitably have many defects in grains and grain boundaries that affect the device performance. Researchers have made efforts to produce bulk  $\text{CH}_3\text{NH}_3\text{PbI}_3$  crystals that exhibit exceptional photovoltaic properties such as long diffusion length and lifetime of photogenerated charge carriers, though the integration of bulk crystal into the perovskite solar cell architecture has proved challenging.

Now, a team of Chinese and U.S. scientists led by Profs. Jiangyu Li and Jinjin Zhao has successfully grown single-crystalline  $\text{CH}_3\text{NH}_3\text{PbI}_3$  film

directly on electron-collecting FTO/TiO<sub>2</sub> substrate, as shown in Fig. 1. They took advantage of temperature gradient and the capillary effect during the growth process, enabling them to produce high-quality single crystalline film tightly integrated on FTO/TiO<sub>2</sub>. This proves critical, as FTO/TiO<sub>2</sub> is the most widely used electron-collecting substrate for perovskite solar cells, making subsequent device fabrication straightforward.

Indeed, the single crystalline CH<sub>3</sub>NH<sub>3</sub>PbI<sub>3</sub> film shows excellent photovoltaic properties. Measured directly on an FTO glass substrate with poor electron extraction, the time-resolved photoluminescence has much longer carrier lifetime in single crystalline CH<sub>3</sub>NH<sub>3</sub>PbI<sub>3</sub> film compared to polycrystalline film, as seen in Fig. 2(a). When a TiO<sub>2</sub> electron-collecting layer is added to the FTO glass, then the charge carrier lifetime drops substantially, thanks to efficient electron extraction at the TiO<sub>2</sub>/perovskite interface. As a result, the device exhibits photovoltaic conversion efficiency of 8.78 percent, the highest reported to date for a single crystalline perovskite solar cells. The team says that the system has much room for improvement, and with continuous optimization of materials and devices, they believe that the single crystalline [perovskite](#) solar cells will rival their polycrystalline counterparts in the foreseeable future.

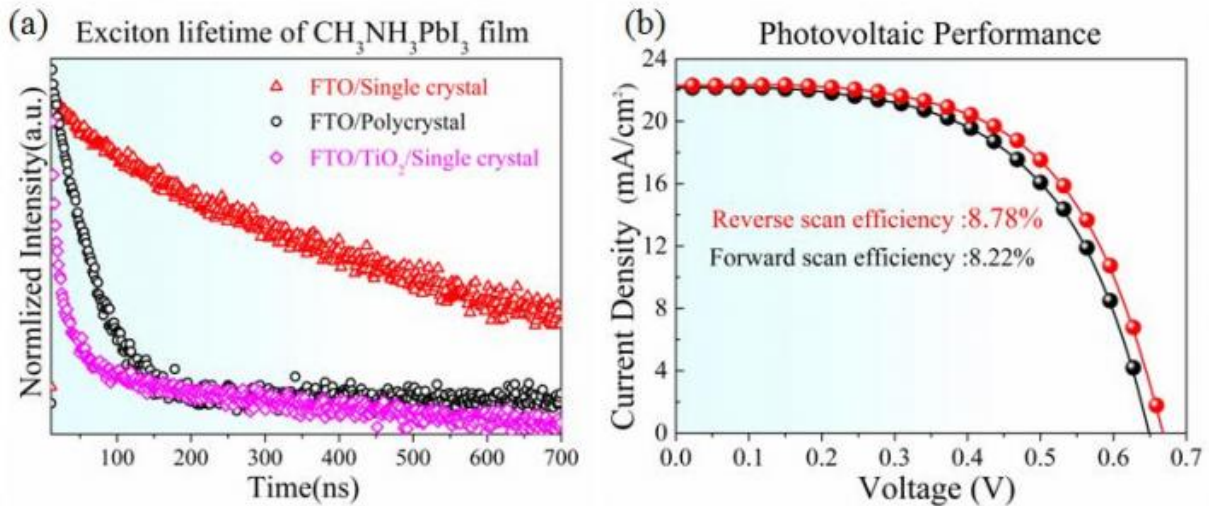


Photo-carrier properties and photovoltaic performance of single crystalline and polycrystalline  $\text{CH}_3\text{NH}_3\text{PbI}_3$ . (a) time-resolved photoluminescence shows longer charge lifetime in single crystalline film and efficient charge collection at the interface with FTO/ $\text{TiO}_2$  substrate; and (b) current density-voltage curve shows a photovoltaic efficiency of 8.78 percent. Credit: Science China Press

**More information:** Jinjin Zhao et al. Single crystalline  $\text{CH}_3\text{NH}_3\text{PbI}_3$  self-grown on FTO/ $\text{TiO}_2$  substrate for high efficiency perovskite solar cells, *Science Bulletin* (2017). [DOI: 10.1016/j.scib.2017.08.022](https://doi.org/10.1016/j.scib.2017.08.022)

Provided by Science China Press

Citation: Researchers create single-crystal perovskite solar cells (2017, August 29) retrieved 19 April 2024 from <https://phys.org/news/2017-08-single-crystal-perovskite-solar-cells.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is

provided for information purposes only.