

3-D LiDAR sensor enabling detection of distances with wide angle of view

September 11 2017



3D LiDAR sensor

(September 2017, Panasonic)

Credit: Panasonic

Panasonic Corporation announced today that it has developed a 3-D LiDAR sensor that accurately measure the direction of and distance to objects with a wide angle of view, which is critical for autonomous operation of mobile robots. Employing Panasonic's propriety laser-scanning technology, this 3-D LiDAR is capable of scanning the laser as


wide as up to 60 degrees vertically and 270 degrees horizontally to achieve stable operation of autonomous robots. Sample shipments will start in January 2018. Panasonic will exhibit the 3-D LiDAR at "CEATEC JAPAN 2017" at Makuhari Messe, Chiba, Japan, from October 3 to 6, 2017

The wide scanning angle of the newly developed 3-D LiDAR helps the detection of objects on the ground precisely as well as the roughness of the ground surface. In addition, the range of scanning angles and the resolution can be tailored precisely by adjusting the rotation angle and speed of the mirrors in the system. This feature gives users accuracy and flexibility to choose the most appropriate conditions for the measurement depending on their usage. That will facilitate the widespread use of [autonomous robots](#) that navigate inside or outside facilities with moving objects around, including people.

Panasonic's new 3-D LiDAR has the following features:

- Wide view angles: 60 [degrees](#) in vertical and 270 degrees in horizontal directions
- Variable detection settings for viewing angles and resolution in vertical
- Accurate detection under strong sunlight

Autonomous robots need to detect the condition of the ground as well as the objects around them since they will be operated inside and/or outside facilities with many moving objects including people. Conventional 3-D LiDARs that are designed for autonomous driving of automobiles cannot scan the laser in a wide range of vertical angles. Therefore, they cannot precisely detect the conditions of the ground. For this reason, conventional LiDARs need to be combined with other sensors that can detect the ground condition. This results in complicated configuration and the design of the autonomous robots.

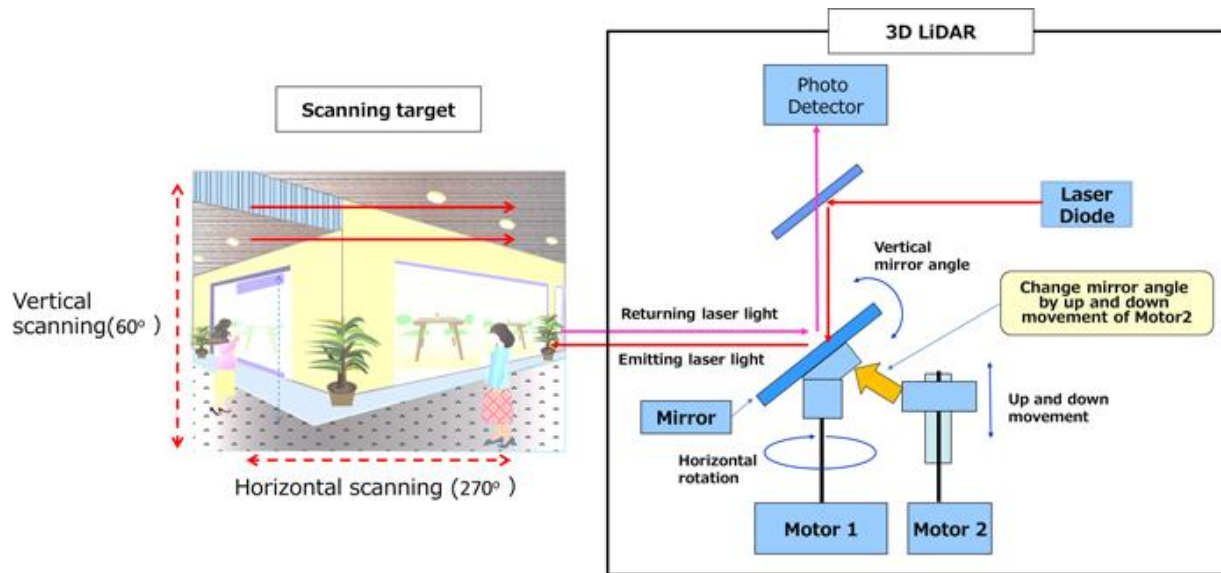


Details of laser-scanning system in Panasonic's 3-D LiDAR. Credit: Panasonic

Wide view angles: 60 degrees in vertical and 270 degrees in horizontal directions

Existing 3-D LiDARs cannot detect objects around them with wide view angles especially for the vertical direction. Panasonic developed the laser-scanning technologies utilizing its proprietary design of optical system and motor controlling technology to move the mirror that have been developed for the mass production of optical disk drives. The 3-D LiDAR employs a single laser and moving mirror for the detection. Laser light travels the same optical path in the Panasonic's original optical system. The mirror moves toward two different directions by two motors. The single-path design and [wide angle](#) of the mirror-move enable wide view angles with 60 degrees in vertical and 270 degrees in horizontal directions. The 3-D LiDAR does not require any additional sensors for the detection of the objects around including those on the

ground, which makes the detection system in autonomous robots very simple.

Variable detection settings for viewing angles and resolution in vertical

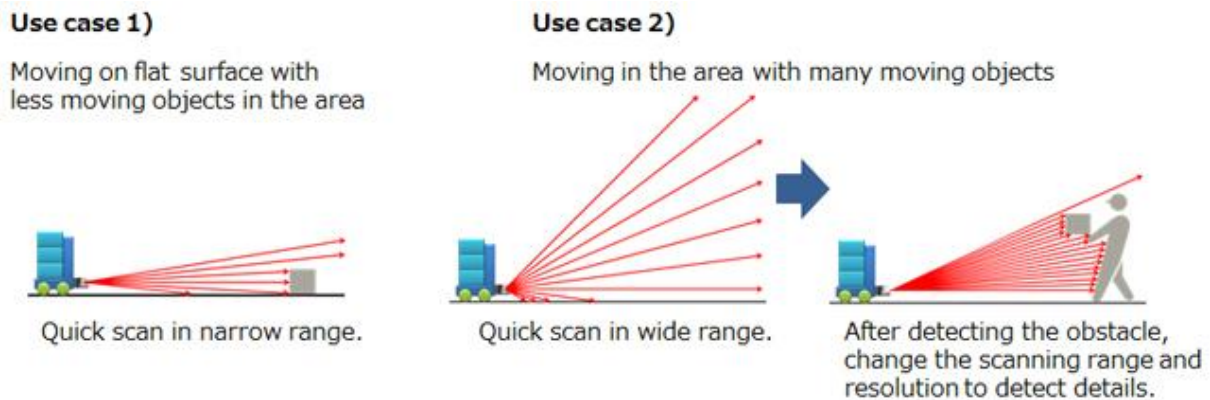

Examples of laser scanning by Panasonic's 3-D LiDAR. Credit: Panasonic

Autonomous robots are required to detect the objects in the specified area. For example, autonomous robots do not need to sense the objects in details when they move on flat surface with less objects in the area. The [object](#) detection sensor can be scanned at relatively high speed according to the [robot](#)'s speed. On the other hand, in an area with many moving people or objects, it requires high sensing technologies with a wide angle of view. Furthermore, the sensor needs to examine the details of the object's surface that has been detected. Panasonic's new 3-D LiDAR can easily vary the detection settings thanks to its unique laser-scanning technologies employed. Stable and time-effective operations of autonomous robots can be achieved by choosing the most suitable detection settings depending on the conditions of the areas where they

will be used.


Accurate detection even under strong sunlight

Autonomous robots also require the accuracy in detecting objects under strong sunlight. By making the return light follow the same path as the emitted laser, Panasonic has successfully reduced the noise induced by bright sunlight. As a result, the newly developed 3-D LiDAR can be operated with high accuracy even under the light intensity of 100,000 lux that corresponds to strong sunlight in summer-time.

Image by camera



Image by Panasonic's 3D LIDAR

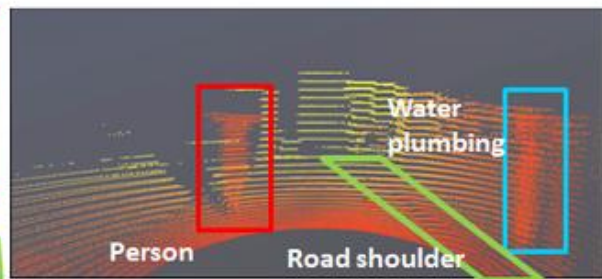

Example of detection image under strong sunlight. Credit: Panasonic

Basic specifications of Panasonic's 3D LiDAR:

Item	Performance
Scanning angle	270 degrees in horizontal and 0 to 60 degrees in vertical direction (variable)
Resolution in vertical angles	Can be chosen from three modes of 1.5 degrees, 3.0 degrees and 7.5 degrees.
Detectable distance	0.5 m to 50 m
Frame rate	5 fps to 25 fps
Ambient light immunity	Up to 100,000 lux (under sunlight)
Outside dimensions	130 mm (H) x 120 mm (W) x 140 mm (D)

Provided by Panasonic Corporation

Citation: 3-D LiDAR sensor enabling detection of distances with wide angle of view (2017, September 11) retrieved 19 April 2024 from <https://phys.org/news/2017-09-d-lidar-sensor-enabling-distances.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.