


Researchers report new technique for de-icing surfaces

September 21 2017

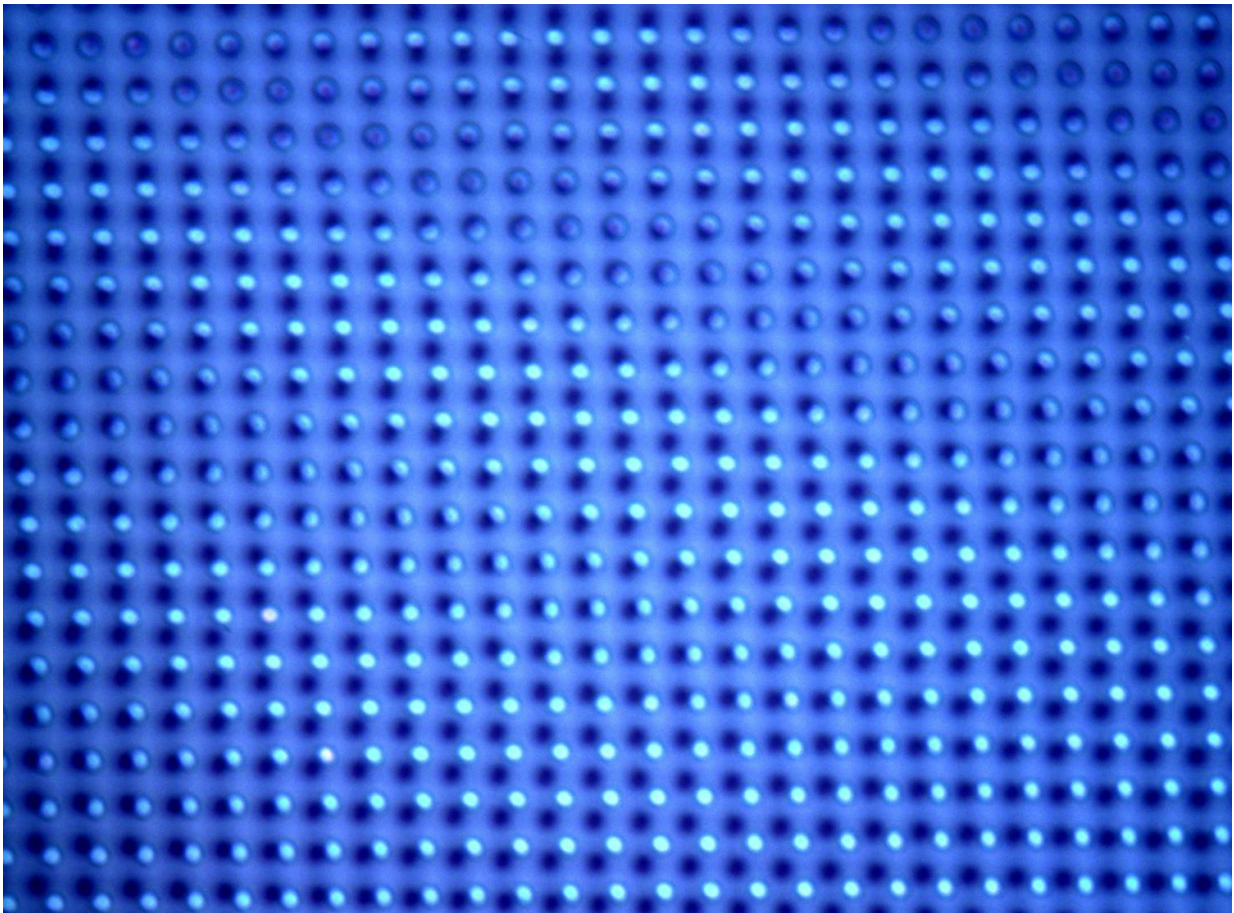

The photograph shows one of the patterned sub-structures that Zhang and his colleagues used in the design of their anti-icing coating. The substructures helped cause macro-cracking at the interface between ice on the surface and the surface itself, a process the researchers called MACI, for macro-crack initiator. Credit: NTNU Nanomechanical Lab

Scientists and engineers have been waging a quiet but determined battle against the build-up of ice on infrastructure. A thin coating of ice on solar panels can wreak havoc with their ability to generate electricity. Thin layers of ice on the vanes of wind turbines can slow their efficiency.


And a thin layer of ice on an electrical transmission line can be the first step in dangerous ice build-up. That's exactly what happened in Quebec in 1998, when an accumulation of ice on transmission lines and towers crushed more than 150 towers, leaving more than a million people without power and causing roughly CDN \$5 billion in damage.

Now, a research team at the Norwegian University of Science and Technology (NTNU) reports a novel approach to prevent ice build-up by cracking it. "We think we have found a very interesting method to reduce ice adhesion which is unique, and a breakthrough in the anti-icing community," says Zhiliang Zhang, a professor in the Department of Structural Engineering at NTNU and head of the SLICE research project team that discovered the technique. Their approach has just been published in *Soft Matter*, a publication of the Royal Society of Chemistry.

If you've ever taken a flight in winter, you've almost certainly experienced one approach to keeping ice from sticking to a [surface](#), which involves spraying de-icing fluid on a plane's wings and other critical parts of the aircraft. The spray physically removes any accumulated ice, but it also makes the surface of the plane less likely to accumulate snow or ice (although only for a brief period). In most industrial applications, however, such as on an offshore rig or ship in the Arctic, or on wind turbines, spraying antifreeze on a structure isn't an option.

Scientists and engineers have thus created substances that are called

superhydrophobic. This means they excel at repelling water. Superhydrophobic substances can be applied to surfaces by spraying or dipping. Often, they are made of fluorinated chemicals that are not particularly environmentally friendly. And scientists are not completely certain that a superhydrophobic surface can remain ice-free, at least for long periods. That motivated Zhang and his colleagues at the NTNU Nanomechanical Lab to try a completely different approach.

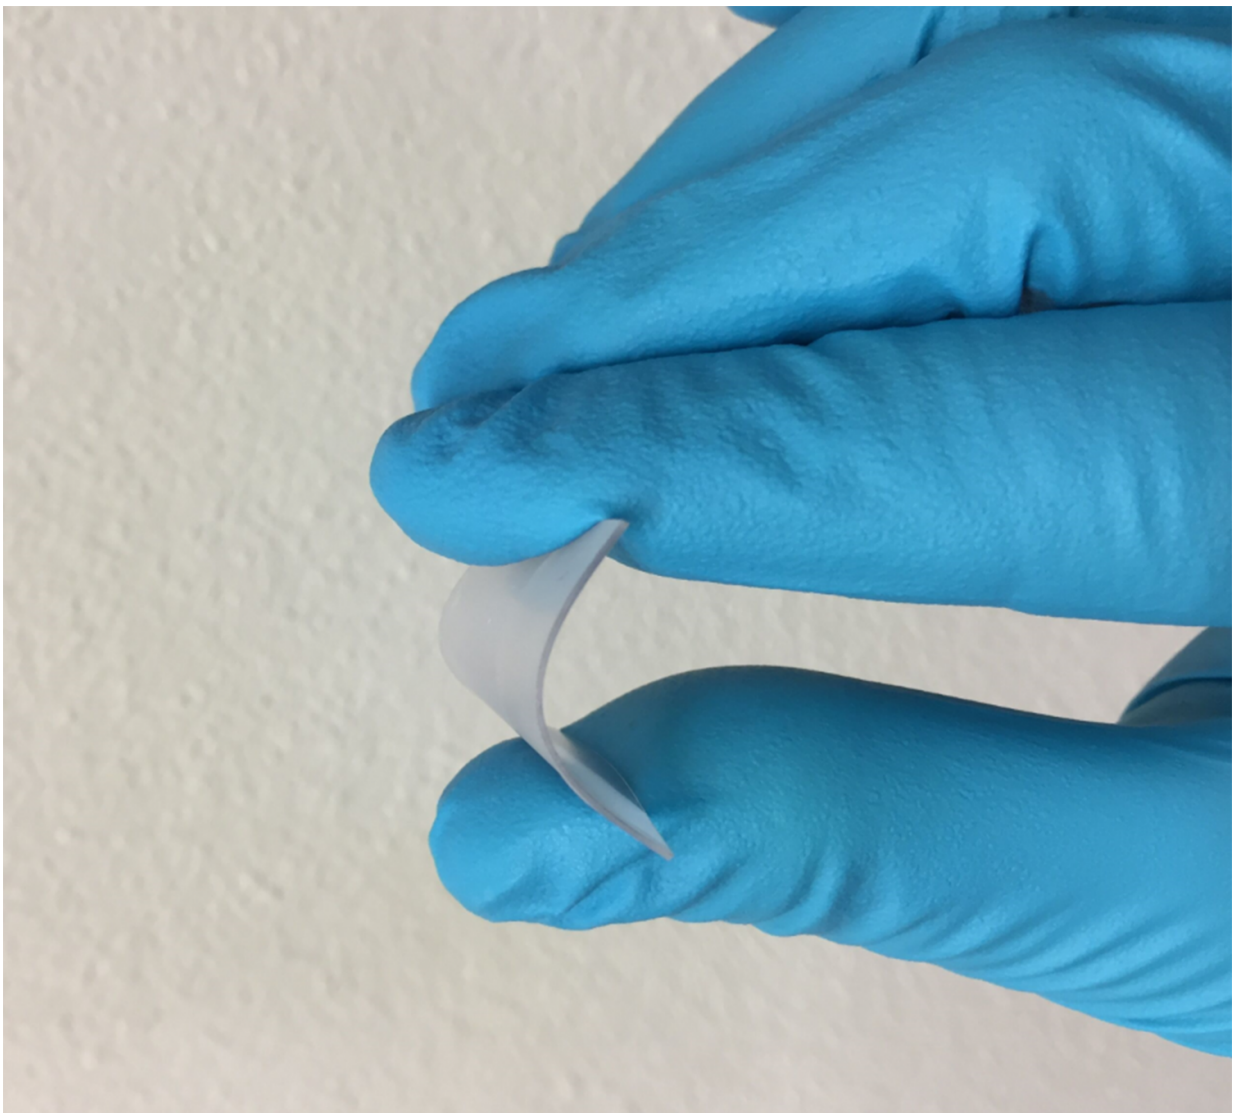

Here's what the anti-icing coating looks like when it is attached to a flexible

piece of plastic. The coating itself is just 30 microns thick, or about the half the width of an average human hair. Credit: NTNU Nanomechanical Lab

"Our strategy is to live with ice," he said, by letting it form, but by ensuring that the layers of ice crack away from the surface and fall off. In their efforts to find ways to keep ice from sticking to surfaces, ice researchers have tried manipulating physical forces to generate interface cracks at the nanoscale and the microscale.

Many ice researchers have tried creating slippery surfaces that rely on surface chemistry to cause cracks by weakening the atomic bonds between the ice and surface. These surface-chemistry-related substances are called NACI, for nano-crack initiators.

At the microscale, ice researchers have built microbumps into the surfaces they want to protect from ice. These microbumps are called micro-crack initiators, or MICI, because their roughness promotes micro-cracks at the contact between the surface and the ice, and limits the ability of the ice to stick to the treated surface.

Neither of these mechanisms are perfect for preventing ice from sticking to a surface. Zhang and his colleagues tested a number of commercial and homemade coatings that rely on NACI and MICI to lower the ability of ice to stick to the surface. They gradually realized that if they added another structure below the surface, they could form large macro-cracks at the interface between the surface and the ice. They called this mechanism MACI, for macro-crack initiator.

As the cracks get larger, the ice is less likely to stay on the surface. In this way, MACI holds the key to getting rid of ice build-up on surfaces, Zhang said. To test their idea, Zhang and his colleagues created

subsurface layers that had microholes or pillars. Then they made a thin film of a substance called polydimethylsiloxane, or PDMS, which covered the holey, bumpy substructure layers.

They tested multiple designs of their MACI inner structures. They also tested what would happen if they used multiple layers with inner holes. The researchers were surprised to find that surfaces that had the MACI substructures had ice adhesion strengths that were at least 50 percent weaker than the pure PDMS surfaces without MACI. A surface with the special MACI design gave the researchers the results they were hoping for, with some of the lowest values for ice adhesion, or stickiness, ever measured.

"The ice adhesion strength for common outdoor steel or aluminum surfaces is around 600-1000 kPa," Zhang said. "By introducing the novel MACI concept to the surface design, we reached the super-low ice adhesion value of 5.7 kPa."

Zhang and his colleagues have more work to do as they develop their idea, but they are excited that they may have cracked the code to preventing dangerous ice buildup while limiting unwanted environmental effects. "Traditional active de-icing techniques... can have major detrimental effects on structures and the environment," Zhang said. "But passive super-low ice adhesion surfaces avoid all those detrimental effects. This is very interesting not only for the scientific community, and for Arctic applications, but for solar panels, for shipping and transmission lines. There are a lot of applications related to everyday life."

More information: Zhiwei He et al, Multiscale crack initiator promoted super-low ice adhesion surfaces, *Soft Matter* (2017). [DOI: 10.1039/c7sm01511a](https://doi.org/10.1039/c7sm01511a)

Provided by Norwegian University of Science and Technology

Citation: Researchers report new technique for de-icing surfaces (2017, September 21) retrieved 27 April 2024 from <https://phys.org/news/2017-09-technique-de-icing-surfaces.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.