


Researchers reveal the effect of nano-diamond on magnetorheological fluids

October 30 2017

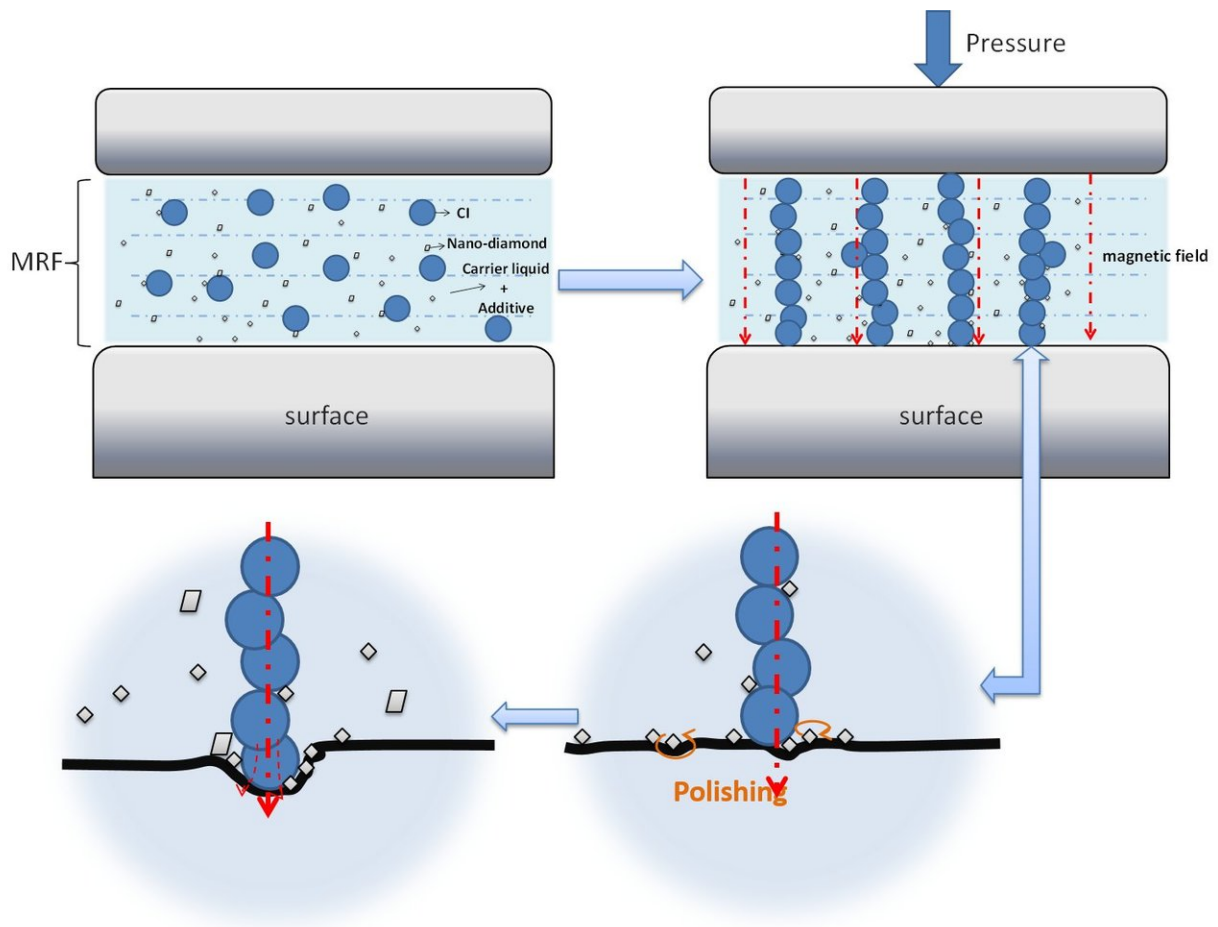

As the fragmented nano-diamond had a high hardness, the MRF on the surface of the ball during friction was not stable. Moreover, as the duration and the role of the load increased, pit and debris appeared on the ball surface. As the nano-diamond was lower-sized, additional nano-diamond and debris went into the pit and continued to further polish the surface, whereas the depth and diameter of

the wear spot became higher. The steel balls rotation produced higher friction and the four-ball test machine detected a higher friction coefficient; consequently, the friction coefficient curve produced a peak. The wall shape change affected the magnetic field strength distribution, whereas the researchers discovered that the deeper groove with the higher the magnetic field strength. At this time, the ferromagnetic particles became a longer solid chain and because the wall was no longer smooth, the friction between the magnetic chain and the wall became higher. This led in the exhibition of a high shear yield strength. Credit: Dr Mingmei Zhao

Chinese researchers have found that nano-diamond has significant impact on the performance of magnetorheological fluids (MRFs). The shear yield strength and settling stability of the MRFs were found to have potential to be highly enhanced through the process. The higher the strength of the magnetic field, the higher the difference in the shear yield strength.

In order to analyze the effects of nano-diamond on the performance of MRFs, the MRF-1 with a 2% mass fraction in nano-diamond and the MRF-2 without nano-diamond were prepared with the carbonyl iron powder in the dispersed phase and the synthetic mineral oil in the continuous phase. The viscosity and shear stress of MRFs under different magnetic fields were measured by the Anton-Paar rheometer (MCR 302). The MRF settling [stability](#) was studied by a standing observation method. A four-ball wear machine was utilized for the wear test at 0.1 T of magnetic [field](#), whereas the [magnetic field](#) was provided by an external coil. Also, the three-dimensional white light interferometer was utilized to observe the surface of the ball wear spot, in order to determine the MRF friction properties.

The results demonstrated that the nano-diamond had a significant increase in surface wear. Both the shear yield [strength](#) and settling

stability of the MRF could be highly enhanced.

The MRF preparation method containing the nano-diamond was simple and low cost, while apparently improved the settling stability of the MRF application and significantly increased the shear yield strength. This [method](#) broke the traditional bottleneck of MRFs and had important significance, but the device wear was more acute. Therefore, the MRF needs to be further improved. The research team is currently exploring preparation of high performance MRF.

More information: Mingmei Zhao et al, Effects of Nano-Diamond on Magnetorheological Fluid Properties, *Nano* (2017). [DOI: 10.1142/S1793292017501193](#)

Provided by World Scientific Publishing

Citation: Researchers reveal the effect of nano-diamond on magnetorheological fluids (2017, October 30) retrieved 26 April 2024 from <https://phys.org/news/2017-10-reveal-effect-nano-diamond-magnetorheological-fluids.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.