


A stopwatch for nanofluids: NIST files provisional patent for microflowmeter

January 19 2018, by Ben P. Stein

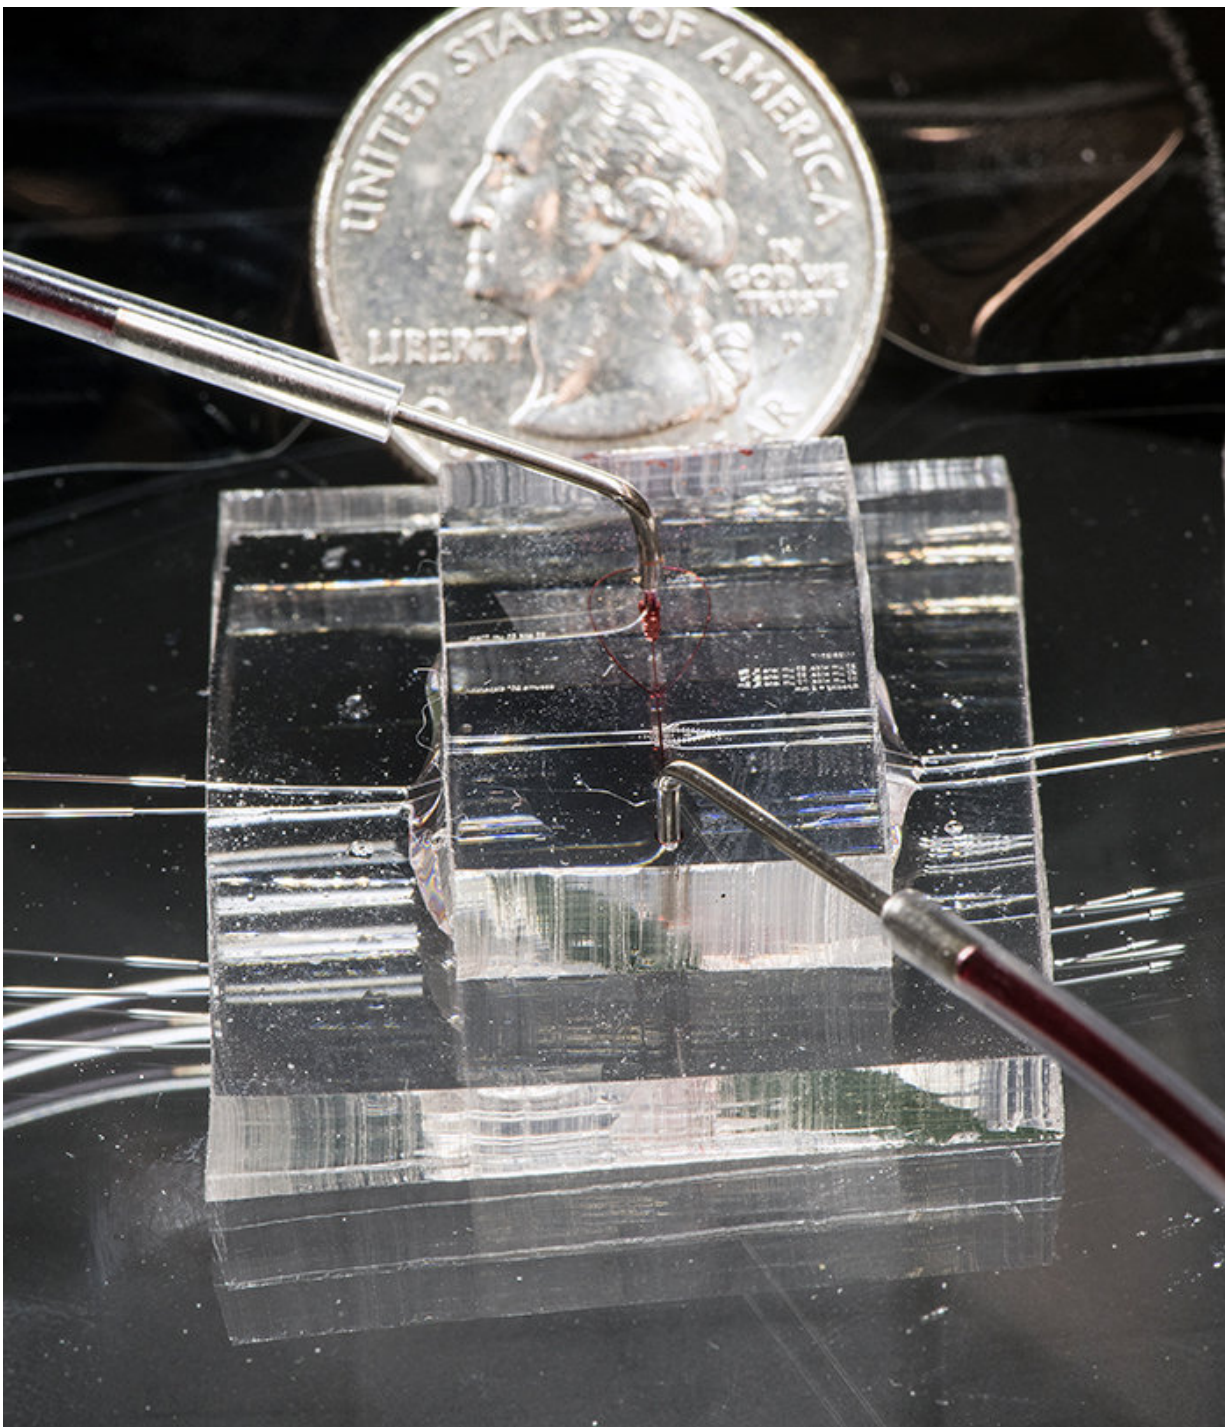

Close-up of a microflow system with red dye in fluid channel. Credit: NIST

The National Institute of Standards and Technology (NIST) has filed a provisional patent application for a microflow measurement system, about the size of a nickel, that can track the movement of extremely tiny amounts of liquids—as small as nanoliters (nL, billionth of a liter) per minute. If water were flowing at that rate from a 1-liter bottle of water, it would take about 200 years to drain.

The invention is designed to fill an urgent need in the rapidly expanding field of microfluidics, in which precisely measuring tiny flow rates is critical. For example, some medical drug-delivery pumps dispense as little as tens of nL per minute into the bloodstream. For comparison, a single drop of water contains 50,000 nL. Clinical diagnostics, chemical research, cell sorting and counting, and continuous-flow micromanufacturing—essentially tiny factories that work nonstop to make small quantities of liquids—also increasingly require accurate measurements of similarly minuscule volumes.

But current state-of-the-art devices used to measure flow on that scale have one or more operational limitations. "Some require calibration, others use complex imaging systems and microscopes; some take data over many minutes, and therefore, can't track dynamic changes, and some are not traceable to the International System of Units," said inventor Greg Cooksey, a biomedical engineer in NIST's Physical Measurement Laboratory.

His optical microflow measurement system, fabricated at NIST's Center for Nanoscale Science and Technology, avoids those complications. It monitors the speed of fluorescent molecules in liquid as they travel down a channel about the width of a human hair, measuring the time interval between the molecules' responses to two separate laser pulses.

Flowing down a microchannel is a fluid filled with [fluorescent molecules](#) that emit green light when exposed to a specific wavelength of blue light.

However, these molecules have been chemically modified to prevent fluorescence. At one point in the channel, an ultraviolet laser destroys the chemical modification of some of the molecules. At another point in the channel, a blue laser causes these bare [molecules](#) to fluoresce. Researchers determine flow rate by measuring the elapsed time between removing the chemical modification and fluorescence .

To exactly mark a start-time reference point, an ultraviolet laser pulse (with a wavelength of 375 nm) is fired along an optical waveguide and into the channel. There, the pulse strikes a chemically protected ("caged") fluorescent molecule moving in the stream. "The molecule can't fluoresce until we activate it with the UV pulse," Cooksey said. "That, in effect, turns the molecule 'on' as its cage is destroyed by the laser. At that point, the molecule becomes responsive to excitation by light."


After the activated molecule has traveled 250 micrometers—about the thickness of a playing card—downstream in the channel, it crosses the path of a blue laser (488 nm).

The molecule absorbs the blue light and immediately emits [green light](#) (520 nm). That emission travels down a wave guide to an optical power meter that continuously measures changes in the emitted light's intensity at a rate of 250,000 times per second.

The emission signals are compared to the timing of the initial activating pulses to determine the elapsed interval. The faster the flow, the less time between activation and emission.

The flow rate is deduced from careful measurements of the time between laser pulses and the channel dimensions, and those measurements are refined with calculations of flow pattern between activation and emission measurements. Therefore, the flow meter does

not require calibration using an independent flow standard. In addition, it is more sensitive than most conventional technologies, and provides continuous real-time data with resolution on the order of 1 millisecond.

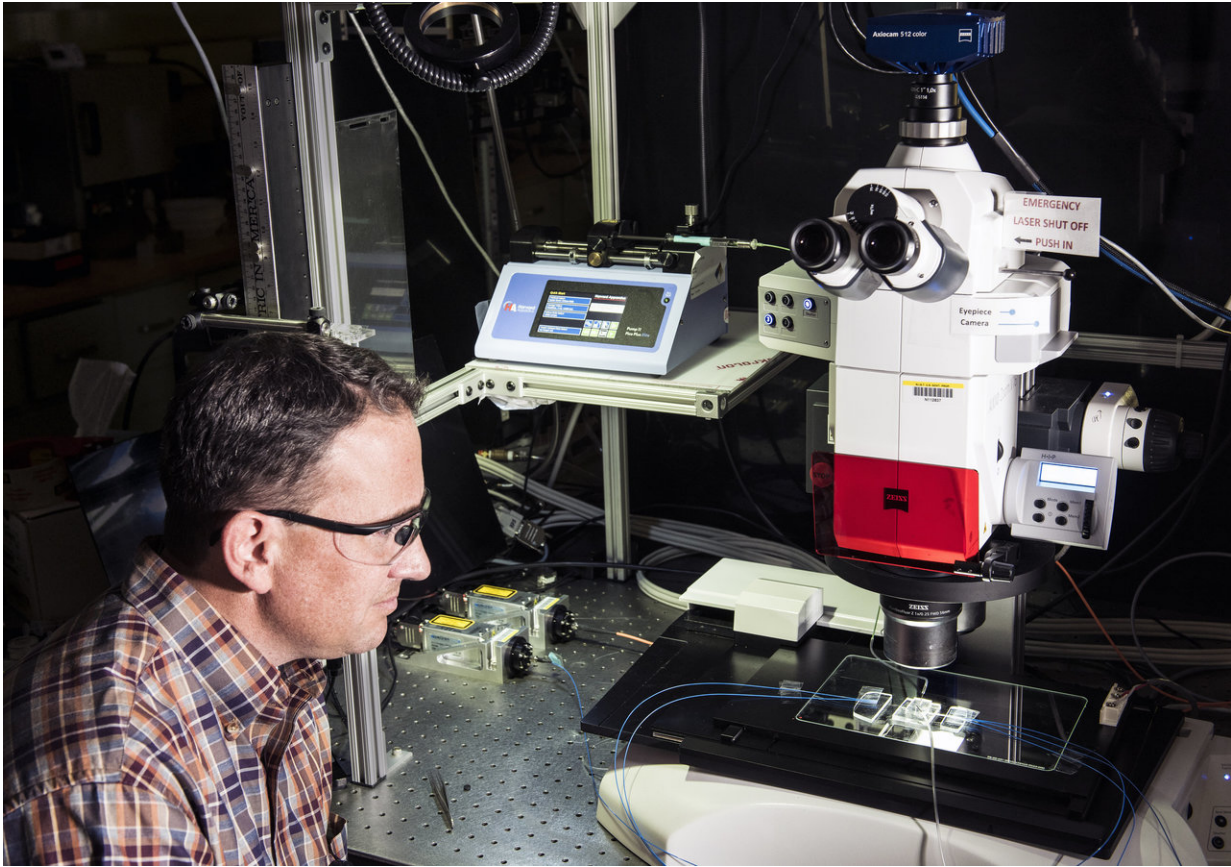

Greg Cooksey with apparatus used to observe microflow meter. Credit: NIST

The invention is also capable of serving as a flow cytometer—a device that counts, or otherwise measures, properties of biological [cells](#) in a fluid stream. There are many ways of engineering cells so that they contain fluorescent "biomarkers" of various kinds, which can be measured as they flow past the detectors in the NIST device.

"That's what we're trying to build in addition to precision [flow](#) measurement—a platform for next-generation biological measurements," Cooksey said. "For example, because of the precise timing built into the system, we can conduct 'time-lapse' studies of cell metabolism, where cells are loaded with fluorescent materials whose emission changes in proportion to their metabolism."

Such information will be useful for studies of cancer, as cancer cells are known to have elevated rates of metabolism. "We could make as many measurements as we want downstream," Cooksey said. "We could use 10 of these optical interrogation points, each separated by, say, 100 milliseconds, and track the decline in light output in each cell through time."

Alternatively, Cooksey said, they could also investigate calcium influx. "Many kinds of cells use calcium for signaling, so if we load the cell with a calcium-sensitive dye, the dye will respond as the calcium concentration changes.

That would allow us to watch changes in real time in functions such as neural communication or triggering of programmed cell death."

A provisional patent application, marking the start of the patent process, has been filed.

This story is republished courtesy of NIST. Read the original story [here](#).

Provided by National Institute of Standards and Technology

Citation: A stopwatch for nanofluids: NIST files provisional patent for microflowmeter (2018, January 19) retrieved 3 May 2024 from <https://phys.org/news/2018-01-stopwatch-nanofluids-nist-provisional-patent.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.