


Marine exploration sensing with light and sound

March 13 2018

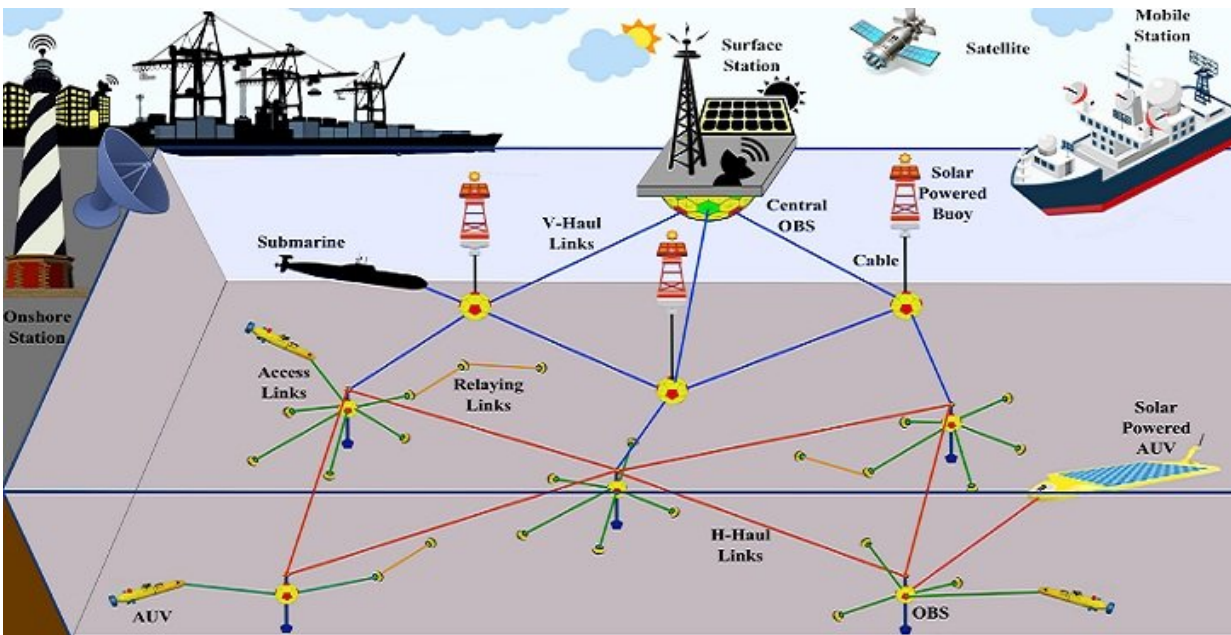

KAUST researchers are modeling various techniques for improving wireless underwater sensor networks. For example, new wireless hybrid sensors that use both acoustic and optical communication could improve underwater data collection for ocean observation. Credit: © 2018 Abdulkadir Celik

Oceanic sensor networks that collect and transmit high-quality, real-time data could transform the understanding of marine ecology, improve pollution and disaster management, and inform multiple industries that draw on ocean resources. A KAUST research team is designing and

optimizing underwater wireless sensor networks that could vastly improve existing ocean sensing equipment.

"Currently, underwater [sensors](#) use acoustic waves to communicate data," explains Nasir Saeed, who is working on a new hybrid optical-acoustic sensor design with colleagues Abdulkadir Celik, Mohamed Slim Alouini and Tareq Al-Naffouri. "However, while acoustic communication works over long distances, it can only transmit limited amounts of data with long delays. Recent research has also shown that noise created by humans in the oceans adversely affects marine life. We need to develop alternative, energy-efficient sensors that limit noise pollution while generating high-quality data."

One option is to use optical communication technology instead, but light waves will only travel short distances underwater before they are absorbed. Optical sensors also rely heavily on pointing and tracking mechanisms to ensure they are correctly orientated to send and receive signals. The team therefore propose a hybrid sensor capable of transmitting both acoustic and optical signals simultaneously. In this way, a data-collection buoy on the water surface can communicate with every sensor in a network spread out beneath it.

However, marine research requires accurate measurements taken from precise locations, so scientists need to know where every sensor is at any given time. The team used mathematical modeling to develop a proof-of-concept localization technique.

"Using our technique, the sensors transmit their received signal strength information (RSSI) to the surface buoy," says Saeed. "For a large communication distance, the sensors use acoustic signals, but if the sensor is within close range of another sensor, it will send an optical signal instead."

Multiple RSSI measurements for each sensor are collected by the surface buoy. The buoy then weights these measurements to give preference to the most accurate readings before calculating where each sensor is positioned.

Alouini's and Al-Naffouri's teams propose that their sensors will require a new energy source rather than relying on short-term battery power. They envisage an energy-harvesting system that powers fuel cells using microscopic algae or piezoelectric (mechanical stress) energy.

More information: et al, Energy Harvesting Hybrid Acoustic-Optical Underwater Wireless Sensor Networks Localization, *Sensors* (2017).
[DOI: 10.3390/s18010051](https://doi.org/10.3390/s18010051)

Provided by King Abdullah University of Science and Technology

Citation: Marine exploration sensing with light and sound (2018, March 13) retrieved 20 April 2024 from <https://phys.org/news/2018-03-marine-exploration.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.