


Space smash—simulating when satellites collide

April 24 2018

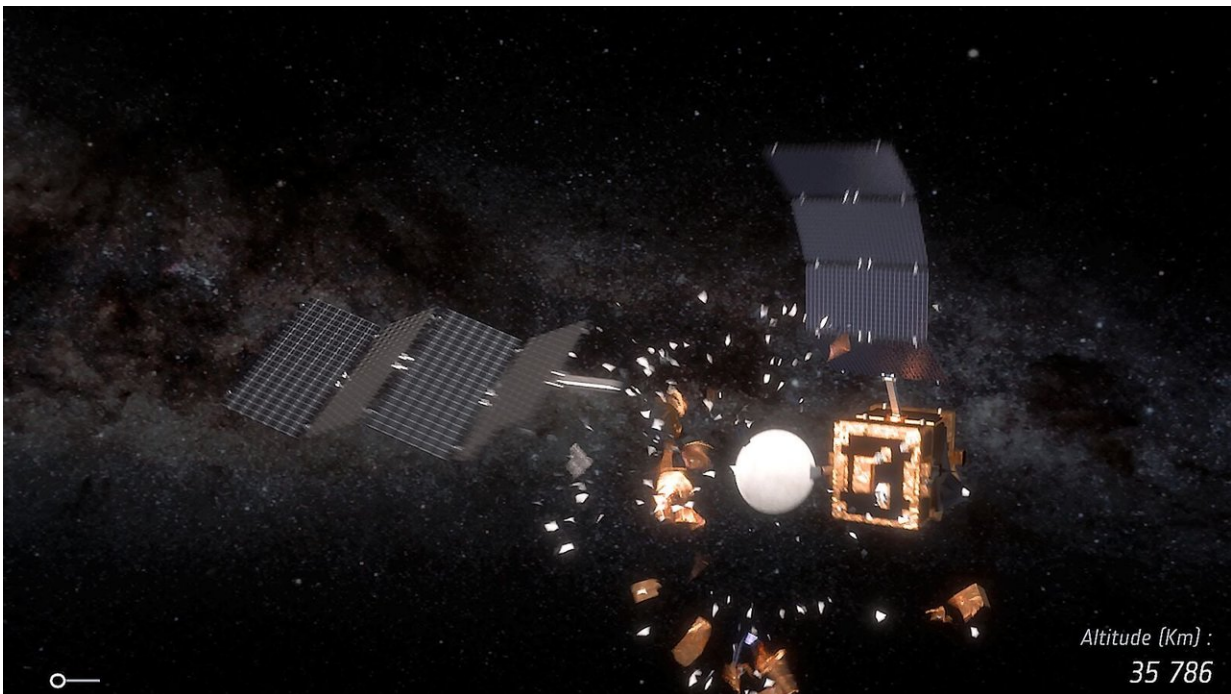

Satellite collisions give rise to debris; see this video for more information.
Credit: ESA/ID&Sense/ONiRiXEL, CC BY-SA 3.0 IGO, CC BY-SA 3.0 IGO

Satellites orbiting Earth are moving at many kilometres per second – so what happens when their paths cross? Satellite collisions are rare, and their consequences poorly understood, so a new project seeks to simulate them, for better forecasting of future space debris.

Only four such collisions have taken place in the history of spaceflight so far – the majority of [space debris](#) stems from explosions of leftover propellant tanks or batteries – but they are projected to grow more common.

"We want to understand what happens when two satellites collide," explains ESA structural engineer Tiziana Cardone, overseeing the project.

"Up until now a lot of assumptions have been made about how the very high collision energy would dissipate, but we don't have a solid understanding of the physics involved.

"We want to be able to visualise in detail how the satellites would break up, and how many pieces of debris would be produced, to improve the quality of our models and predictions."

The total energy involved is orders of magnitudes higher than typical structural engineering for space, which focuses on enduring the violence of launch. "This is really unknown territory," adds Tiziana.

"We need to have this understanding because we are currently working on expensive debris mitigation strategies based on our understanding of debris behaviour," explains Holger Krag of ESA's Space Debris Office. "We're projecting the evolution of the debris environment up to 200 years ahead.


"Of the four known collisions, only one of them took place in the way we expected, with both satellites breaking up catastrophically, generating clouds of debris. The others were quite different, so there's something missing from our picture.

"By running many different collision variants then we hope to

understand what happened across the actual collisions, to help substantiate our modelling."

Two different kinds of software simulations are being undertaken: at Germany's Fraunhofer Institute for High-Speed Dynamics and the other at a consortium led by the Center for Studies and Activities for Space at the University of Padua in Italy.

The first approach is based on a sophisticated numerical method to simulate the deformation and fragmentation processes in a collision. The colliding objects are modelled with realistic structural and mechanical properties, represented by a 'finite element mesh'.

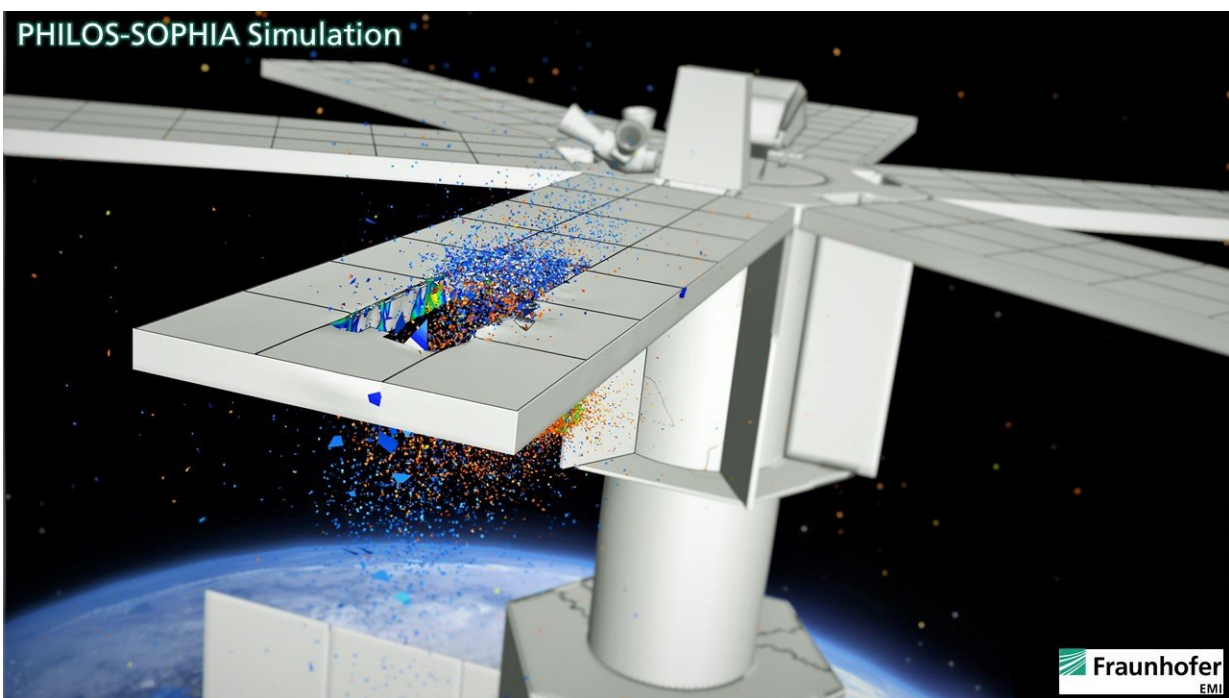








Snapshot of a simulated collision between a model of the LOFT (Large Observatory For X-ray Timing) satellite and a 12-unit CubeSat, moving with a relative velocity of 11 km/s and hitting at a 32 degree angle. LOFT is a candidate ESA Science mission competing for a launch opportunity in the early 2020s. At

the Fraunhofer Institute for High-Speed Dynamics, colliding objects are simulated at the material level with realistic structural and mechanical properties, represented by a 'finite element mesh'. These elements are converted into discrete particles as the structure fragments. This allows the simulation of a satellite's structural response to collision and predicts the cloud of impact-generated fragments, as well as its evolution over time. Credit: ESA/Fraunhofer Institute for High-Speed Dynamics

These elements are converted into discrete particles as the satellites fragment. This allows the simulation of the satellites' structural response to the collision as well as the generation of the fragment cloud, and its evolution over time.


The second approach treats the spacecraft as made up of larger elements, such as panels, payload, propellant tanks or solar arrays, attached together with physical links. When the energy transfer of the collision takes place, these links are broken apart and the elements are fragmented. A library of previous simulations and empirical data is applied to show how these elements fragment under the force of the impact.

<p><u>Sphere vs Loft gaussian distrib.</u></p>	<p>Impactor <u>Al-alloysphere</u> Diameter=50 mm Velocity=8.5 km/s Impact angle=45°</p>	<p>Target  Empty LOFT model Impact on detector panel (modelled with brittle material) with velocity vector towards the centre of mass of the spacecraft body</p>
<p>time = 1.500000e-03</p> 	<p>time = 1.654167e-03</p> 	<p>time = 3.536315e-03</p> 
<p>time = 1.500000e-03</p> 	<p>time = 1.654167e-03</p> 	<p>time = 3.536315e-03</p> 

An alternative simulation method, showing a 5 cm aluminium alloy sphere striking the LOFT LOFT (Large Observatory For X-ray Timing) satellite at a velocity of 8.5 km/s and an impact angle of 45 degrees. LOFT is a candidate ESA Science mission competing for a launch opportunity in the early 2020s. This component-level approach, undertaken by a consortium led by Center for Studies and Activities for Space at the University of Padua in Italy, treats the spacecraft as made up of larger elements, such as panels, payload, propellant tanks or solar arrays, attached together with physical links. When the energy transfer of the collision takes place, these links are broken apart and the elements are fragmented. A library of previous simulations and empirical data is applied to show how these elements fragment under the force of the impact. Credit: ESA/Center for Studies and Activities for Space

The two types of simulation together – operating at material and component levels – should give new insight into the underlying physics of collisions, but has begun by mimicking the effects of a single item of [debris](#) – the kind of collision that can be simulated physically in terrestrial labs.

Once these simulations duplicate the observed reality, then they will be used to reproduce entire impacts of 500 kg-scale satellites.

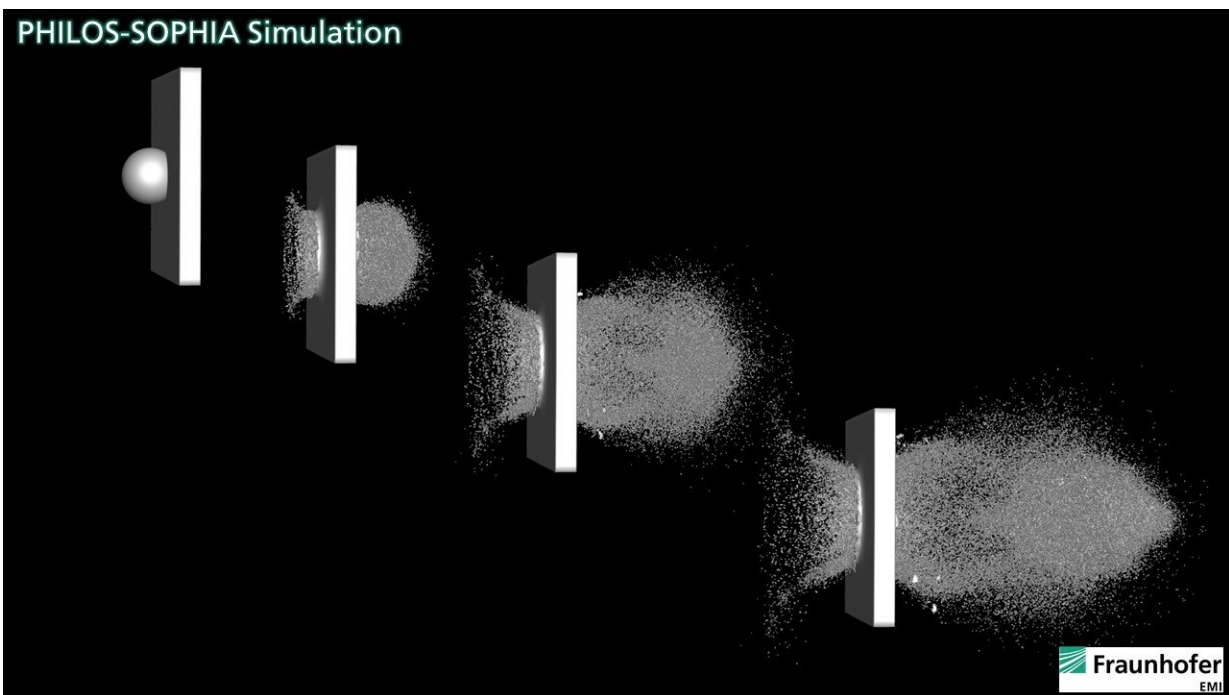

Simulating a hypervelocity impact of a sphere onto a satellite surface. At the Fraunhofer Institute for High-Speed Dynamics approach, a sophisticated numerical method is used to simulate the deformation and fragmentation processes of the collision. This approach allows for a physically consistent simulation, which agrees very well with experimental results. Credit: ESA/Fraunhofer Institute for High-Speed Dynamics

The first known [collision](#) took place in 1991, when Russia's Cosmos 1934 was struck by a piece of Cosmos 926. Then, in 1996, France's Cerise [satellite](#) was hit by a fragment of an Ariane 4 rocket. In 2005 a US upper stage was hit by a fragment of a Chinese rocket's third stage. In 2009 an Iridium satellite collided with Russia's Cosmos-2251.

Provided by European Space Agency

Citation: Space smash—simulating when satellites collide (2018, April 24) retrieved 26 April 2024 from <https://phys.org/news/2018-04-space-smashsimulating-satellites-collide.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.