


Electron sandwich doubles thermoelectric performance

June 20 2018

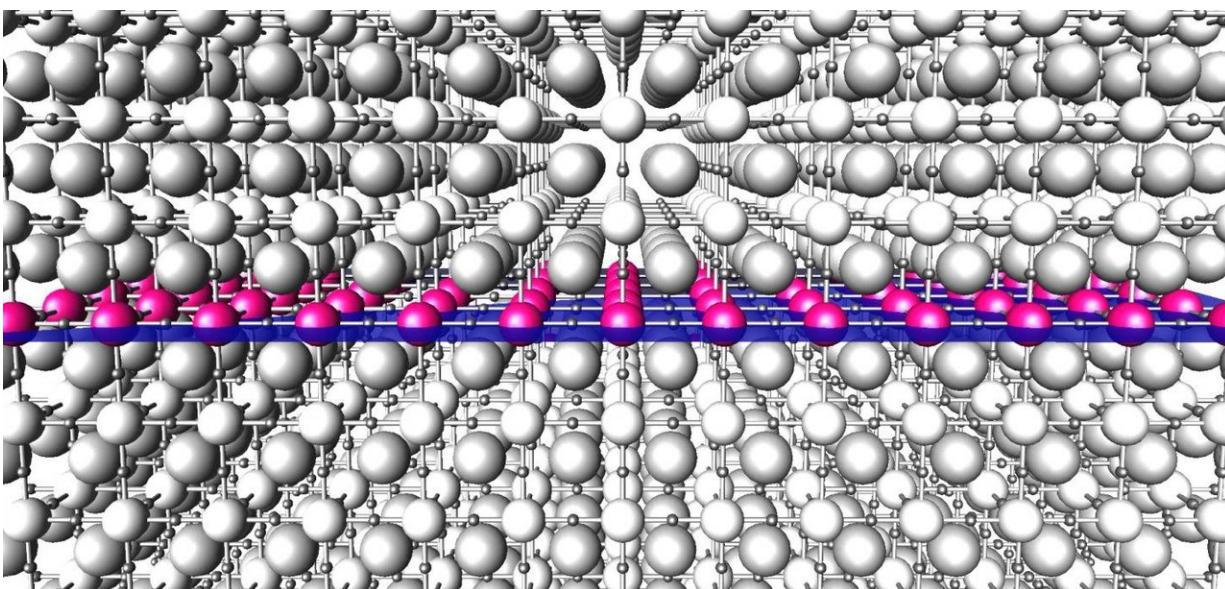

Conceptual drawing of the superlattice in which spread electrons are confined to a narrow space to enhance thermoelectric conversion. Credit: Hokkaido University

Researchers more than doubled the ability of a material to convert heat into electricity, which could help reduce the amount of wasted heat, and thus wasted fossil fuel, in daily activities and industries.

Researchers from Hokkaido University and their colleagues in Japan and Taiwan have improved the ability to transform wasted [heat](#) into usable

electricity by significantly narrowing the space through which spread electrons move, according to a new study published in the journal *Nature Communications*.

More than 60 percent of energy produced by [fossil fuels](#) is lost as waste heat. One way to address this problem is to convert the wasted heat into electricity, known as thermoelectric energy conversion. However, improving the conversion rate has been difficult because of a trade-off relationship between the required properties within the material.

Thermoelectric materials convert heat into electricity when there is a temperature difference, a phenomenon known as the Seebeck effect. Scientists have been investigating ways to confine electrons to a narrow space as a way to enhance conversion rates. In 2007, researchers built an artificial superlattice composed of conducting [ultrathin layers](#) sandwiched by thick insulating layers. This method yielded higher voltage but did not improve conversion rates. Researchers have predicted that performance can be significantly improved if electrons with longer de Broglie wavelength, which means they are more spread, are confined into a narrow conducting layer, but it had not yet been proven experimentally.

The research team, led by Hiromichi Ohta of Hokkaido University, designed a superlattice in which [electrons](#) are spread by 30 percent wider as compared to previous experiments. This resulted in much higher voltage and doubled the thermoelectric conversion rate recorded from previous methods.

"This is a significant step forward towards reducing the amount of heat wasted by power plants, factories, automobiles, computers, and even human bodies," says Hiromichi Ohta of Hokkaido University.

More information: Yuqiao Zhang et al, Double thermoelectric power

factor of a 2D electron system, *Nature Communications* (2018). [DOI: 10.1038/s41467-018-04660-4](https://doi.org/10.1038/s41467-018-04660-4)

Provided by Hokkaido University

Citation: Electron sandwich doubles thermoelectric performance (2018, June 20) retrieved 8 May 2024 from <https://phys.org/news/2018-06-electron-sandwich-thermoelectric.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--