

Switchable plasmonic routers controlled by external magnetic fields by using magneto-plasmonic waveguides

August 7 2018

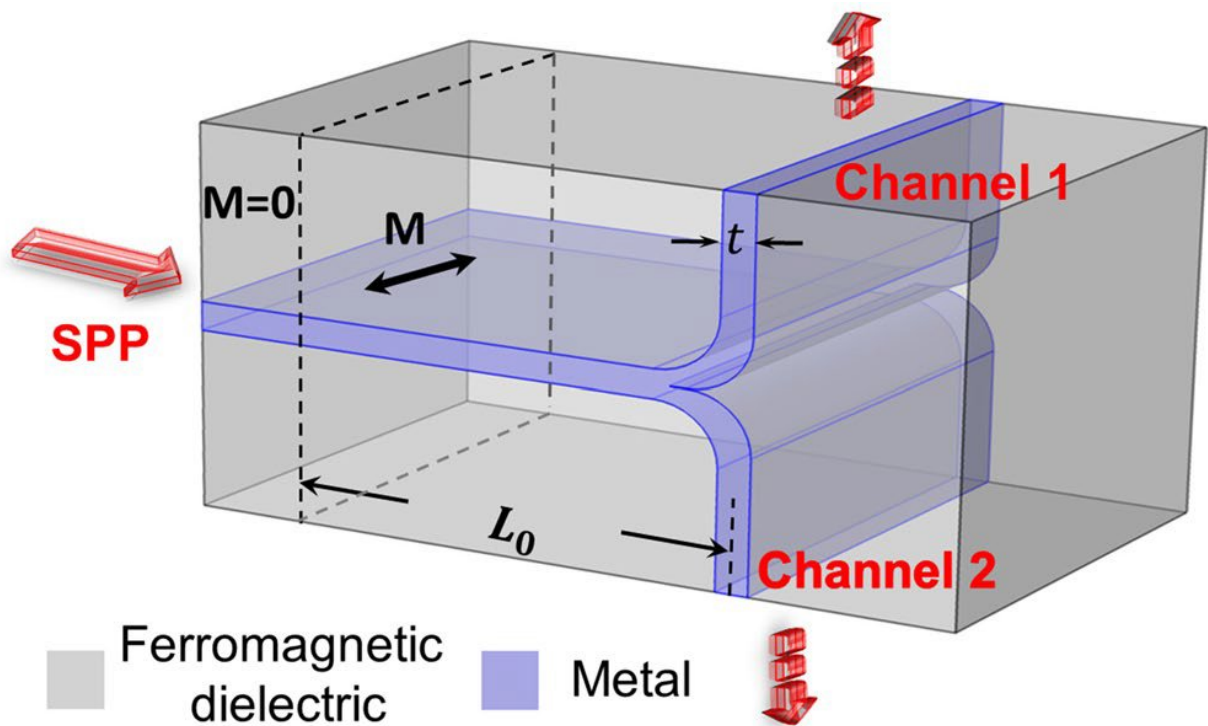


Figure 1 shows the configuration of a switchable plasmonic router consisting of a T-shaped metallic waveguide surrounded by a ferromagnetic dielectric material and under the action of an external magnetic field. Credit: MBI

Plasmonic waveguides open the possibility to develop dramatically

miniaturized optical devices and provide a promising route towards the next generation of integrated nanophotonic circuits for information processing, optical computing and others. Key elements of nanophotonic circuits are switchable plasmonic routers and plasmonic modulators.

Recently, Dr. Joachim Herrmann (MBI) and his external collaborators have developed new concepts for the realization of such nanodevices. They investigated the propagation of surface-plasmon-polaritons (SPP) in magneto-[plasmonic](#) waveguides. Based on the results of this study, they proposed new variants of switchable magneto-plasmonic routers and magneto-plasmonic disk modulators for various nanophotonic functionalities. In a [waveguide](#) based on a metal film with a thickness exceeding the skin depth and surrounded by a ferromagnetic dielectric, an [external magnetic field](#) in the transverse direction can induce a significant spatial asymmetry of mode distribution of surface-plasmon-polaritons (SPP). Superposition of the odd and the even asymmetric modes over a certain distance leads to a concentration of the energy on one interface, which is switched to the other interface by [magnetic field reversal](#).

The requested magnitude of magnetization is exponentially reduced with the increase of the metal film thickness. Based on this phenomenon, the group proposed a new type of waveguide-integrated magnetically controlled switchable plasmonic routers. A configuration of such nanodevice is shown in Fig. 1, consisting of a T-shaped metallic waveguide surrounded by a ferromagnetic dielectric under an external magnetic field inducing a magnetization M . In Fig. 2, numerical results for the plasmon propagation by solving the Maxwell equation show channel switching by the magnetic field reversal with a 99 percent high contrast within the optical bandwidth of tens of THz. Here, g is the gyration $g = \chi M$, χ is the magneto-optical susceptibility and g_0 is a characteristic gyration requested to induce a significant mode asymmetry. Magnetic field reversal by integrated electronic circuits can

be realized with a repetition rate in the GHz region. Note that up to now, there have been few papers reporting the realization of switchable plasmonic routers based on branched silver nanowires controlled by the polarization of the input light.

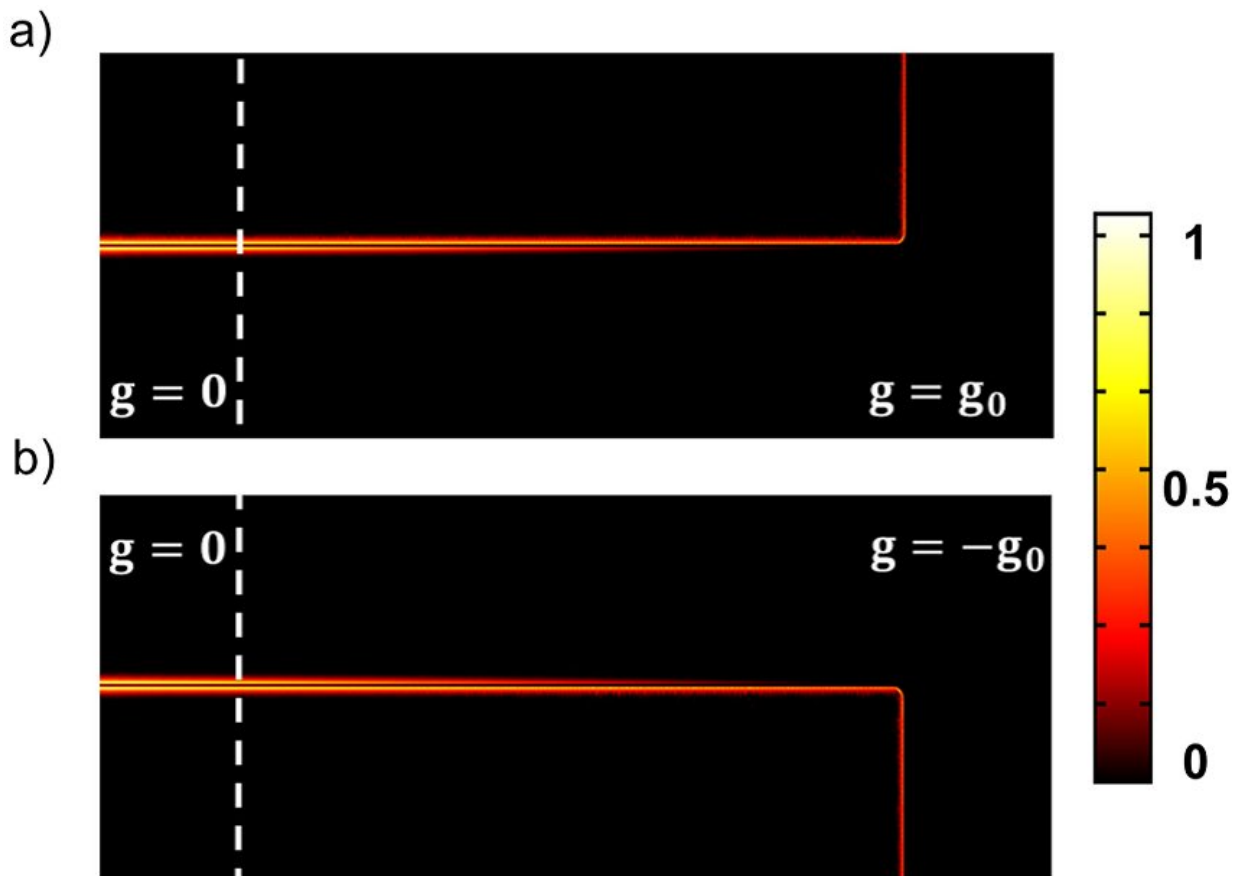


Figure 2 shows the numerical results for the distribution of the plasmon intensity demonstrating channel switching. The reversal of the direction of the external magnetic field leads to a switching of the SPP propagation from channel 1 in (a) to channel 2 in (b). The metal waveguide is made from gold and the surrounding ferromagnetic dielectric from Bi-substituted iron garnet (BIG). Credit: MBI

In a second paper, the group proposed and studied a novel type of ultra-

small plasmonic modulator based on a metal-isolator-metal waveguide and a side-coupled magneto-optical disk controlled by an external magnetic field (see Fig.3). The wavenumber change and the transmission of surface-plasmon-polaritons (SPPs) can be tuned by altering the magnetic field. Reversible on/off switching of the running SPP modes by a reversal of the direction of the external magnetic field is demonstrated. Resonant enhancement of the magneto-plasmonic modulation by more than 200 times leads to a modulation contrast ratio more than 90 percent, keeping a moderate insertion loss within an optical bandwidth of hundreds of GHz. Numerical simulations by the solution of Maxwell's equations confirm the predictions by the derived analytical formulas of a high-contrast magneto-plasmonic modulation. Fig. 4 shows the distribution of the magnetic [field](#) components of the SPPs at a gyration $g=0.03$ and $g=-0.03$, respectively. As seen by changing the direction of the external [magnetic field](#), the transmission of the SPPs is switched from an off to an on state via the changed interference pattern in the waveguide.

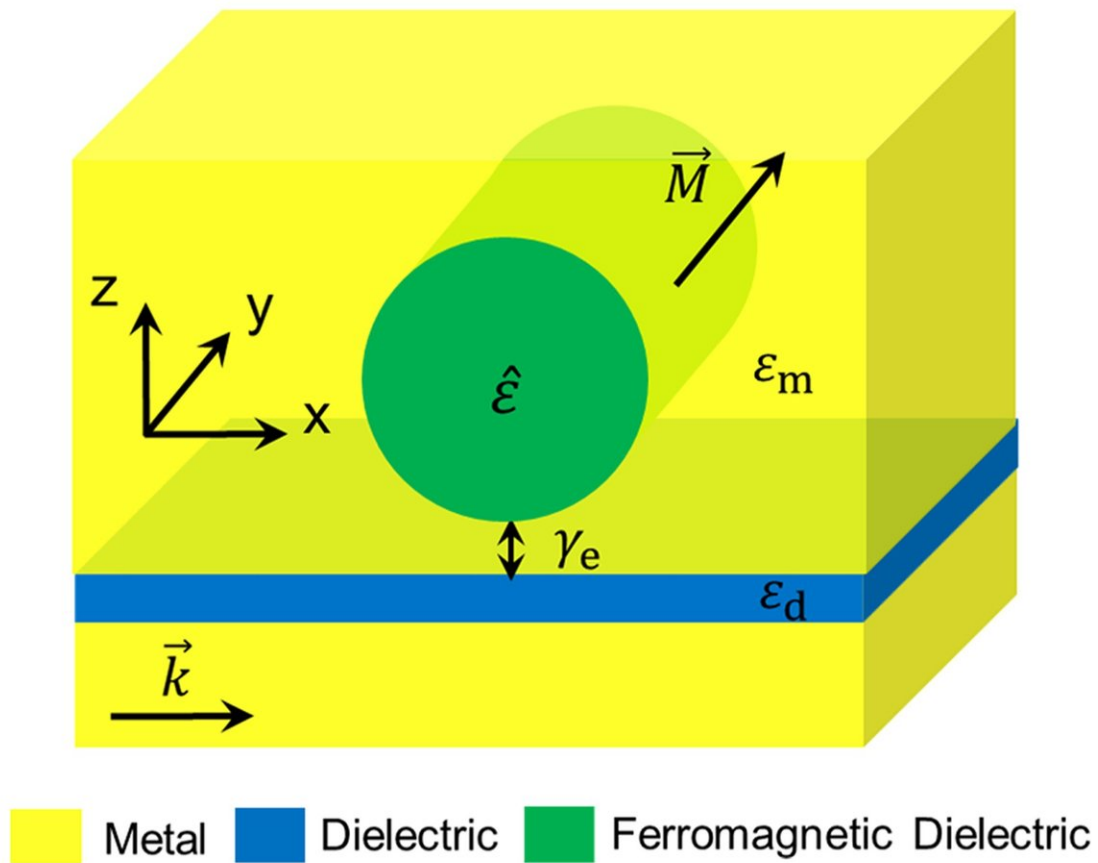


Figure 3 shows the scheme of the magnetoplasmonic disk resonator side-coupled to a metal-insulator-metal waveguide and controlled by an external magnetic field. Credit: MBI

More information: Kum-Song Ho et al, Switchable plasmonic routers controlled by external magnetic fields by using magneto-plasmonic waveguides, *Scientific Reports* (2018). [DOI: 10.1038/s41598-018-28567-8](https://doi.org/10.1038/s41598-018-28567-8)

Provided by Forschungsverbund Berlin e.V. (FVB)

Citation: Switchable plasmonic routers controlled by external magnetic fields by using magneto-plasmonic waveguides (2018, August 7) retrieved 13 March 2024 from

<https://phys.org/news/2018-08-switchable-plasmonic-routers-external-magnetic.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--