


Spray-coated tactile sensor on a 3-D surface for robotic skin

September 24 2018

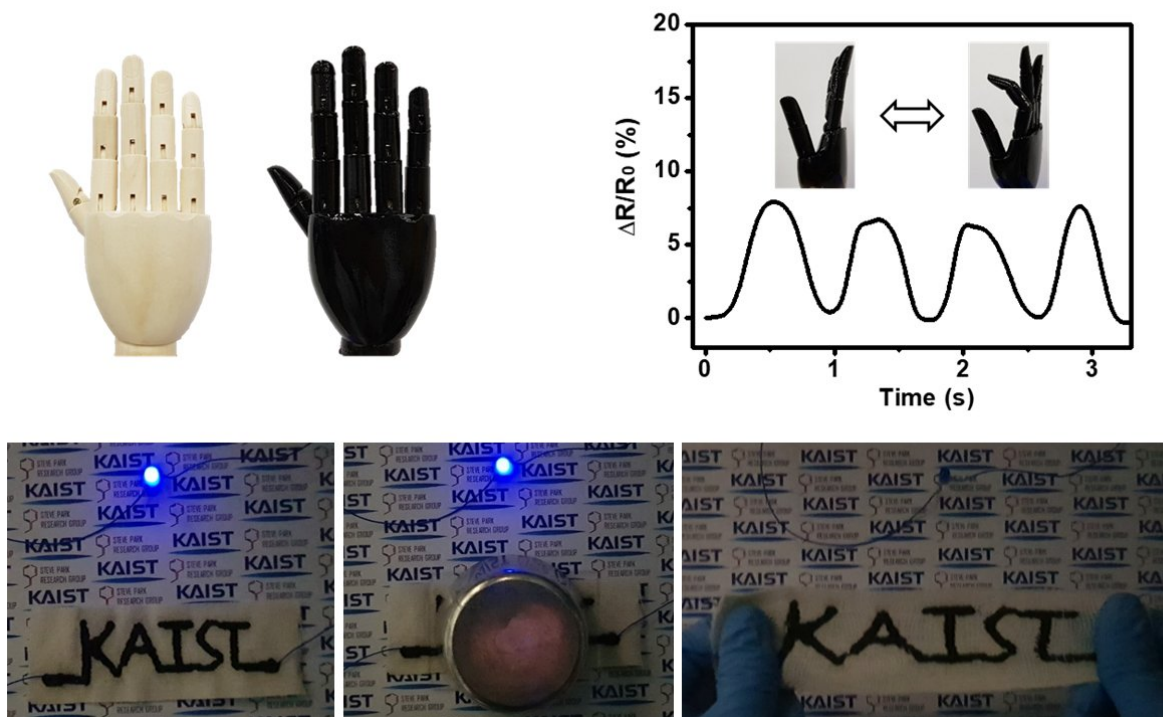

Fabrication of e-skin using various printing methods and the detection of signals for wearable and robotic applications. Credit: KAIST

Robots will be able to conduct a wide variety of tasks as well as humans if they can be given tactile sensing capabilities.

A KAIST research team has reported a stretchable, [pressure](#)-insensitive strain sensor by using a solution-based process. The process is easily scalable to accommodate large areas and can be coated as a thin film on three-dimensional, irregularly shaped objects via spray coating. These conditions make their processing technique unique and highly suitable for robotic electronic skin or [wearable electronics](#) applications.

The making of electronic skin to mimic the tactile sensing properties of human skin is an active area of research for applications such as wearable electronics, robotics and prosthetics. One of the major challenges in electronic skin research is differentiating external stimuli, particularly strain and pressure. Another issue is uniformly depositing electronic skin on three-dimensional, irregularly shaped objects.


To overcome these issues, the research team led by Professor Steve Park from the Department of Materials Science and Engineering and Professor Jung Kim from the Department of Mechanical Engineering developed electronic skin that can be uniformly coated on three-dimensional surfaces and distinguish [mechanical stimuli](#). The new electronic skin can also distinguish mechanical stimuli analogously to human skin.

The structure of the electronic skin was designed to respond differently under applied pressure and strain. Under applied strain, conducting pathways undergo significant conformational changes, considerably changing the resistance. On the other hand, under applied pressure, negligible conformational change in the conducting pathway occurs; e-skin is therefore non-responsive to pressure. The research team is currently working on strain-insensitive pressure sensors to use with the developed strain sensors.

The research team also spatially mapped the local strain without the use of patterned electrode arrays utilizing electrical impedance tomography

(EIT). By using EIT, it is possible to minimize the number of electrodes, increase durability, and enable facile fabrication onto three-dimensional surfaces.

Professor Park said, "Our electronic [skin](#) can be mass produced at a low cost and can easily be coated onto complex three-dimensional surfaces. It is a key technology that can bring us closer to the commercialization of [electronic skin](#) for various applications in the near future."

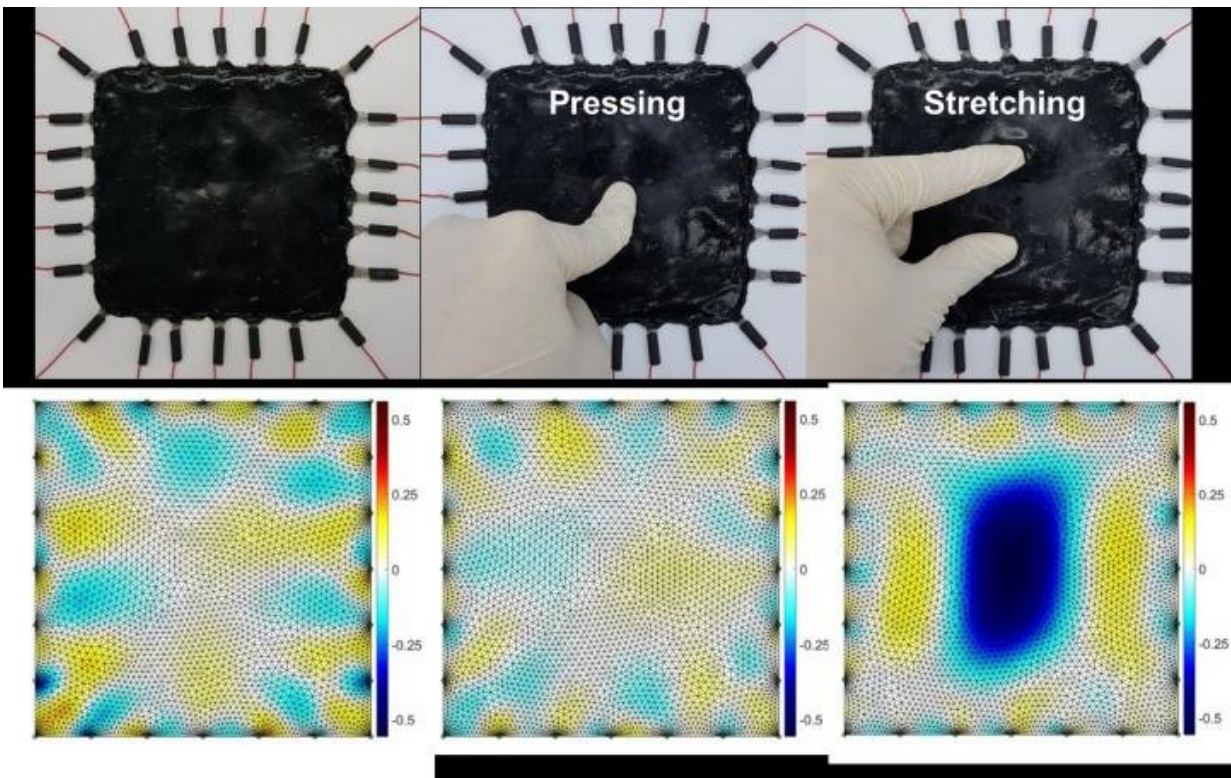

Detecting mechanical stimuli using electrical impedance tomography. Credit: KAIST

More information: Jinwon Oh et al, Pressure Insensitive Strain Sensor with Facile Solution-Based Process for Tactile Sensing Applications, *ACS Nano* (2018). [DOI: 10.1021/acsnano.8b03488](https://doi.org/10.1021/acsnano.8b03488)

Provided by The Korea Advanced Institute of Science and Technology (KAIST)

Citation: Spray-coated tactile sensor on a 3-D surface for robotic skin (2018, September 24) retrieved 27 April 2024 from

<https://phys.org/news/2018-09-spray-coated-tactile-sensor-d-surface.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--