


Deformation of nanotubes to control conductivity

October 24 2018

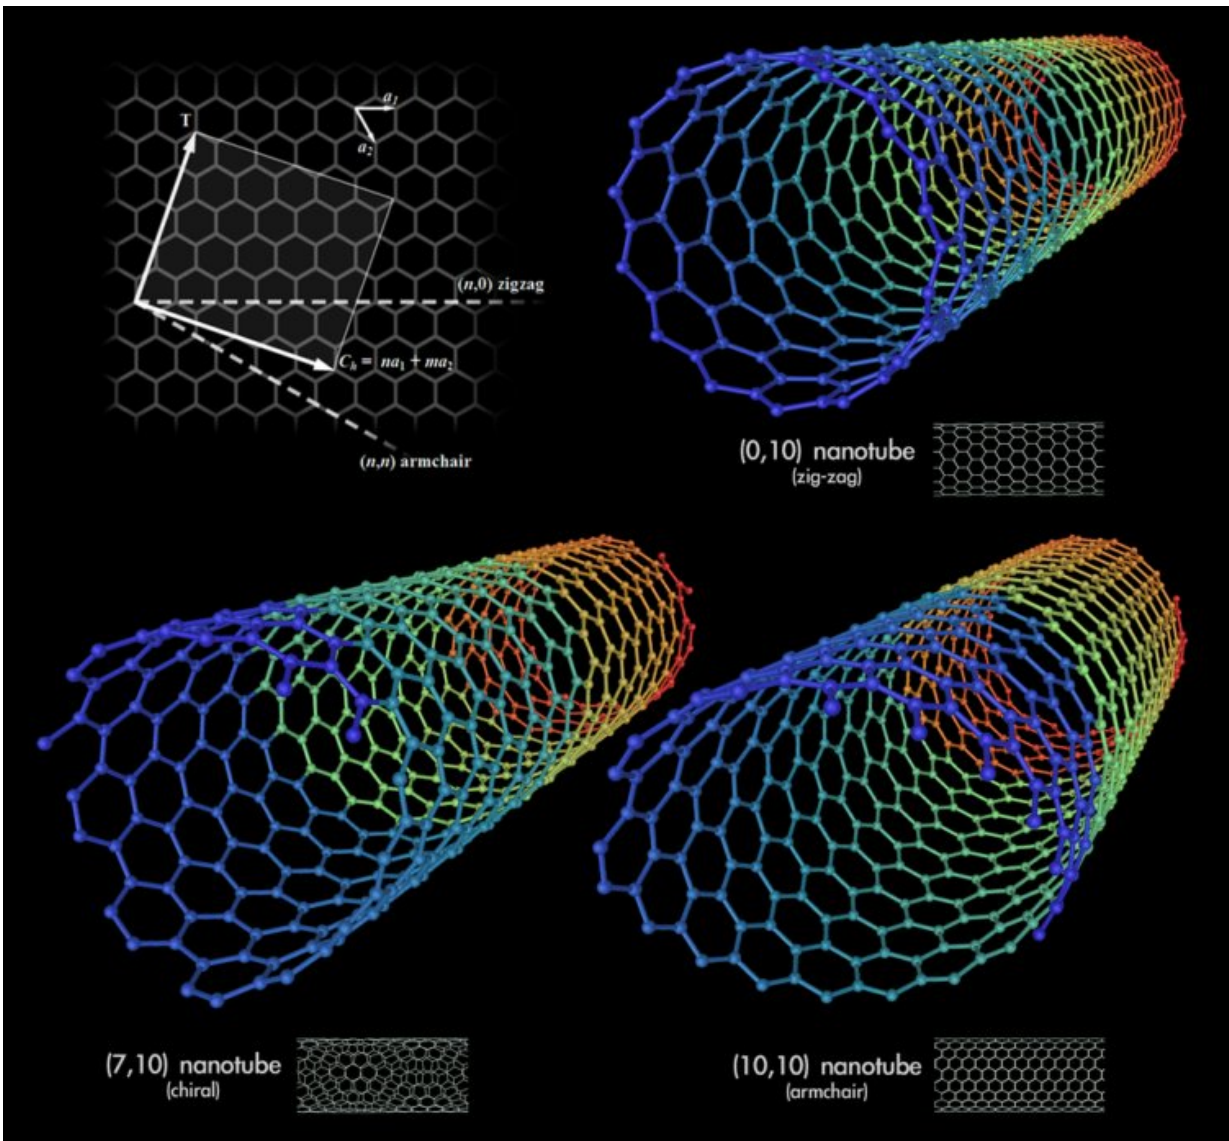

Different types of nanotubes: 1) zigzag, 2) chiral and 3) armchair (or dentated).


Credit: NUST MISIS

Scientists from the NUST MISIS Laboratory of Inorganic Nanomaterials and international colleagues have proved that it's possible to change the structural and conductive properties of nanotubes by stretching them. This finding has applications in electronics and high-precision sensors such as microprocessors and detectors. The research article has been published in *Ultramicroscopy*.

Carbon nanotubes can be represented as a sheet of [graphene](#) rolled in a special way. There are different ways of folding it, which results in the graphene edges interconnecting at different angles, forming either armchair, zigzag or chiral nanotubes (Fig 1).

Nanotubes are considered to be promising materials for use in electronics and sensors because they have high electrical conductivity, which would work well in things like microprocessors and high-precision detectors. However, it is hard to control their conductivity during production. Nanotubes with metallic and semiconducting properties can grow into a single array while microprocessor-based electronics require semiconducting nanotubes that have the same characteristics.

Scientists from the NUST MISIS Laboratory of Inorganic Nanomaterials, jointly with a research team from Japan, China and Australia, led by Professor Dmitri Golberg, have proposed a method that allows for the modification of the structure of ready-made nanotubes and thus changes their conductive properties.

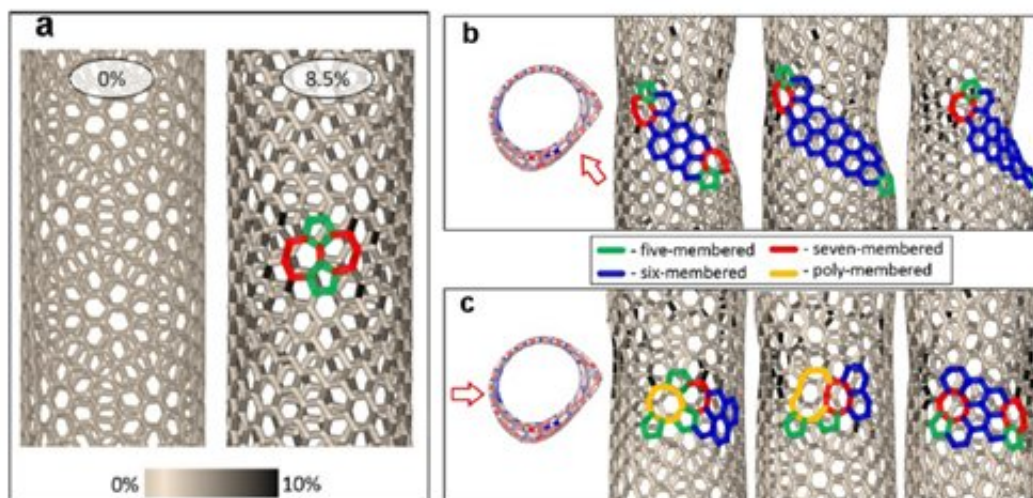

The process of the nanotube structure changing: a) stretching with the first defect formation; b) the restructuring of related carbon bonds; c) the formation of new defects and the continuation of the restructuring of links. Credit: © NUST MISIS

"The basis of the nanotube—a folded layer of graphene—is a grid of regular hexagons, the vertices of which are carbon atoms. If one of the carbon bonds in the nanotube is rotated by 90 degrees, a pentagon and a heptagon are formed at this [junction] instead of a hexagon, and a so-called Stone-Wales defect is obtained in this case. Such a defect can occur in the structure under certain conditions.

"Back in the late '90s, it was predicted that the migration of this defect along the walls of a highly heated nanotube with the application of mechanical stress could lead to a change in its structure—a sequential change in the chirality of the nanotube, which leads to a change in its electronic properties. No experimental evidence for this hypothesis has previously been obtained, but our research paper has presented convincing proof of it," said Associate Professor Pavel Sorokin, head of the Theoretical Materials Science of Nanostructures infrastructure

project at the NUST MISIS Laboratory of Inorganic Nanomaterials.

Scientists from the NUST MISIS Laboratory of Inorganic Nanomaterials have conducted simulations of the experiment at the atomic level. At first, the nanotubes were lengthened to form the first structural defect consisting of two pentagons and two heptagons (a Stone-Wales defect, Fig. 2a), where the prolonged lengthening of the tube began to "spread" to the sides, rearranging other carbon bonds (Fig. 2b). It was at this stage that the structure of the nanotubes changed. With further stretching, more and more Stone-Wales defects began to form, eventually leading to a change in the [nanotubes'](#) conductivity (Fig. 2).

"We were responsible for the theoretical modeling of the process on a supercomputer in the NUST MISIS Laboratory for Modeling and Development of New Materials for the experimental part of the work. We are glad that the simulation results [support] the experimental data," added Dmitry Kvashnin, co-author of the research work, Candidate of Physical & Mathematical Sciences and a researcher at the NUST MISIS Laboratory of Inorganic Nanomaterials.

The proposed technology is capable of helping in the transformation of "metallic" nanotube structure for further application in semiconductor electronics and sensors such as microprocessors and ultrasensitive detectors.

More information: Dai-Ming Tang et al, Chirality transitions and transport properties of individual few-walled carbon nanotubes as revealed by in situ TEM probing, *Ultramicroscopy* (2018). [DOI: 10.1016/j.ultramic.2018.07.012](https://doi.org/10.1016/j.ultramic.2018.07.012)

Provided by National University of Science and Technology MISIS

Citation: Deformation of nanotubes to control conductivity (2018, October 24) retrieved 2 May 2024 from <https://phys.org/news/2018-10-deformation-nanotubes.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.