

# High-performance components made by electroplating

October 30 2018, by Rainer Klose

---



The balance wheel is the beating heart of every mechanical watch mechanism. The delicate springs are usually made of cast, forged Nivarox alloy. At Empa a new generation of balance springs is produced with means of electroplating.  
Credit: A. Lange & Söhne


What happens when something keeps getting smaller and smaller? This is the type of question Empa researcher Johann Michler and his team are investigating. As a by-product of their research completely novel watch

springs could soon be used in Swiss timepieces.

Applied research is not always initiated by industry – but oftentimes it yields results that can swiftly be implemented by companies. A prime example can be seen on the Empa campus in Thun: Tiny watch springs are on display at the Laboratory for Mechanics of Materials and Nanostructures. These springs – the beating heart of every mechanical clock – are not your usual components. They are not made of the famous Nivarox wires, but rather deposited electrically – or, rather, electrochemically – in the desired form from a cold, aqueous saline solution.

By now, the production in the Empa lab has outgrown the first pilot tests. On a regular basis the electroplated springs are delivered to the R&D department at a major Swiss watchmaker, where they are fitted in prototype watch mechanisms. The watches run. However, there is still work to do on their accuracy and long-term stability.

Only a few years ago, Empa had to rely on partners to take care of certain process steps. Meanwhile, the knowhow for the entire production process is pooled in Michler's lab. Laetitia Philippe, who oversees the production of the springs, explains the production steps. The base material is a silicon wafer like the ones used to produce computer chips and solar cells. This wafer is initially coated with a conductive gold layer and, later on, a thin layer of light-sensitive paint. The shape of the [spring](#) is then projected onto it and the illuminated parts of the paint are etched out. Now the desired metallic alloy can be electroplated onto the conductive gold base.

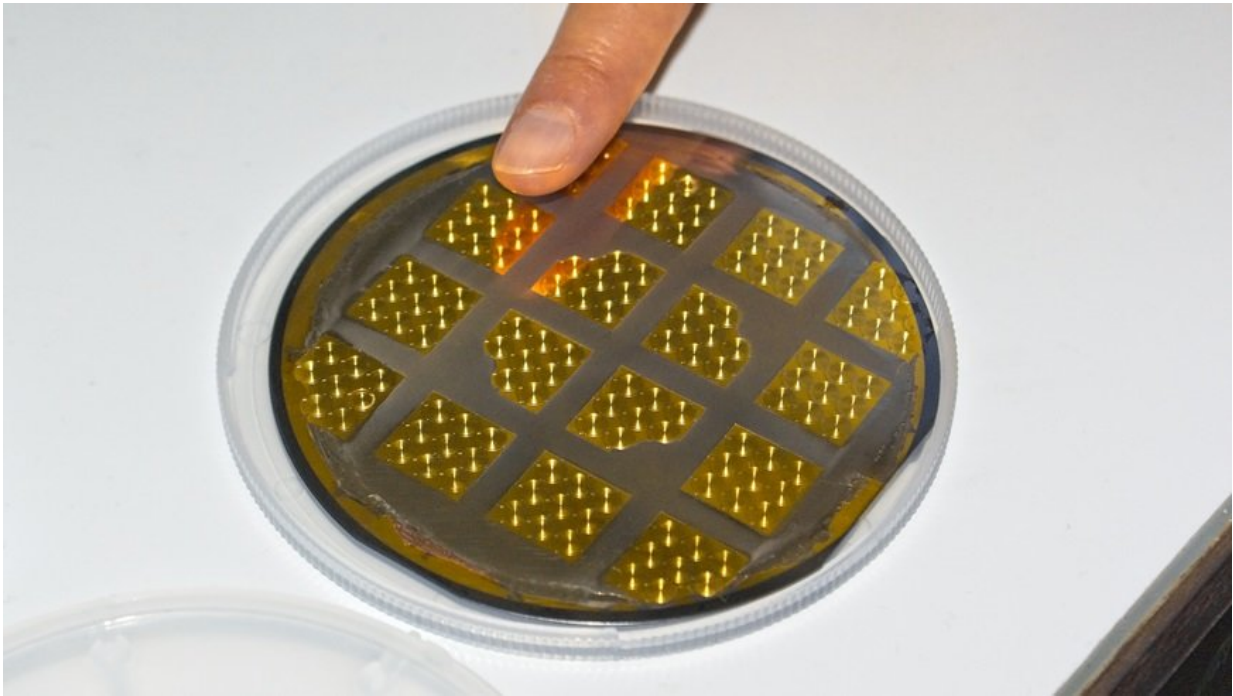

The watch springs are electroplated on a gold plated silicon wafer, coated with a light-sensitive paint. Credit: Empa


As Philippe knows only too well, this crucial step in the process is tricky. "We need a good swirl in the galvanic bath, the right temperature, some organic additives and a current at just the right strength and – if it's alternating current – in the right form." Eventually, the goal is to dissolve the springs out of the galvanic mold. Initially, the researchers use a light microscope to check whether the spring molds are filled correctly with metal. Then the top side of the mold is fine-polished to ensure all springs are of a defined thickness; the result is verified via X-ray fluorescence analysis. Finally, the paint is removed with an oxygen plasma, the silicon wafer etched away using a strong alkaline solution and the gold coating dissolved. The remaining springs then need to go into a special washing machine for a few hours to remove any ridges and protruding metal remnants. These flawless springs then go into the watch lab for prototype

production.

## A by-product of research

For the researchers at Empa, however, this kind of prototype production is only one aspect of their scientific work. "Our goal is certainly not to compete with suppliers in the watch industry," says Michler. "At Empa, we are mainly interested in the process of miniaturization itself."

Michler's team studies the mechanical properties of the tiny parts with minuscule stamps and needles. After all, the properties of materials change if we build tiny parts: Ductile metals become harder; brittle ceramics, on the other hand, become ductile with very small component sizes.

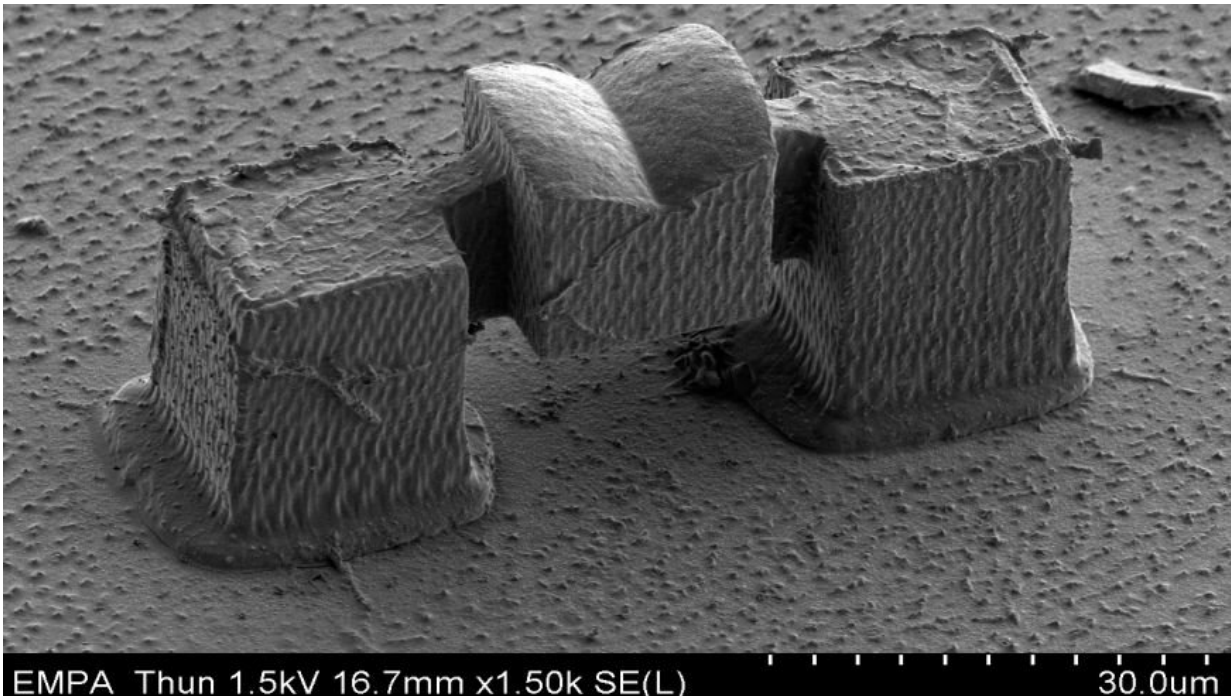

The team succeeded in producing bridges and columns made of solid nickel that are only a few micrometers in size. Credit: Empa

"The prerequisite for any examination, however, is that we are able to produce the objects we are interested in based on defined criteria," explains the Empa researcher. Thus, Michler's team not only strives to master one single process step, but also keep a grip on the quality of the entire process chain. "Some process steps are closely intertwined," says Michler. "If we change one parameter, such as the geometry of the electroplating molds or the composition of the alloy, we usually have to adjust the preceding and subsequent steps, too. We want to understand these connections and the effects of miniaturization in every aspect."

## Additive manufacturing in 3-D

Besides two-dimensional structures, the researchers in Thun have already made progress in the production of 3-D structures – also with the aid of electroplating. The required molds are not produced by illuminating layers of paint on [silicon wafers](#), but rather via what is known as two-photon polymerization. This involves emitting a laser beam in a container with a special liquid plastic precursor. In the focal point of the beam, the liquid polymerizes and solidifies. The Empa team succeeded in making delicate structures and electroplating them with a nickel boron coating. In strength tests, these metallized structures exhibited much more stability than the raw polymer scaffold. Meanwhile, the researchers have also managed to produce bridges and columns made of solid nickel that are merely a few micrometers in size. Stress tests reveal how the nickel alloys behave in these dimensions. "We are already able to make such structures with a nice regularity and in a replicable manner," says Laetitia Philippe. "We have taken a major step forward on the road towards [micromechanics](#) made of electroplated components." In the not too distant future, these components might permit clock mechanisms with particularly fine mechanical complications.

**More information:** Patrik Schürch et al. Additive Manufacturing through Galvanofarming of 3D Nickel Microarchitectures: Simulation-

Assisted Synthesis, *Advanced Materials Technologies* (2018). [DOI: 10.1002/admt.201800274](https://doi.org/10.1002/admt.201800274)

Provided by Swiss Federal Laboratories for Materials Science and Technology

Citation: High-performance components made by electroplating (2018, October 30) retrieved 10 April 2024 from

<https://phys.org/news/2018-10-high-performance-components-electroplating.html>

|                                                                                                                                                                                                                                          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p> |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|