

# Marine sensor gets to grips with salt

February 4 2019

---




The salinity sensor was integrated with an ultralow-power aquatic tag and attached to a bottlenose dolphin. This image was taken at the 2018 workshop "Ocean 2.0: Exploring With Marine Animals" in Valencia, Spain. Credit: Robert Romosan

A flexible, lightweight and robust salinity sensor that can be attached to aquatic animals for long-term monitoring of their habitat has been developed by a multidisciplinary team at KAUST. The team created a sensor that accurately records salinity even after long-term submersion. The sensor can form the basis of a marine animal monitoring device that records multiple underwater habitat parameters, the researchers say.

Located on the shores of the Red Sea, KAUST has a research focus on this ecologically rich and economically important ecosystem. Electrical engineer Jürgen Kosel is working with marine scientist Carlos Duarte from the Red Sea Research Center to develop monitoring devices as part of KAUST's Sensor Initiative. "As engineers, our group aspires to furnish the marine research scientists with new technologies tailored to their needs," Kosel says.

One important parameter is shifting [ocean salinity](#), which can impact the health of marine organisms, but also affects key aspects of the ocean system, such as [water circulation](#). "It is a pivotal parameter used to study properties of the oceans as well as the effects of climate change," explains Alayna Kaidarova, a Ph.D. student in Kosel's team.

The saltier the water, the higher its [electrical conductivity](#), which can be measured using a pair of electrodes. The challenge lies in the fact that, in seawater, microorganisms will start growing on the electrode surface, causing a fall in the recorded conductance values. Kosel and his team have developed a sensor that overcomes this problem.

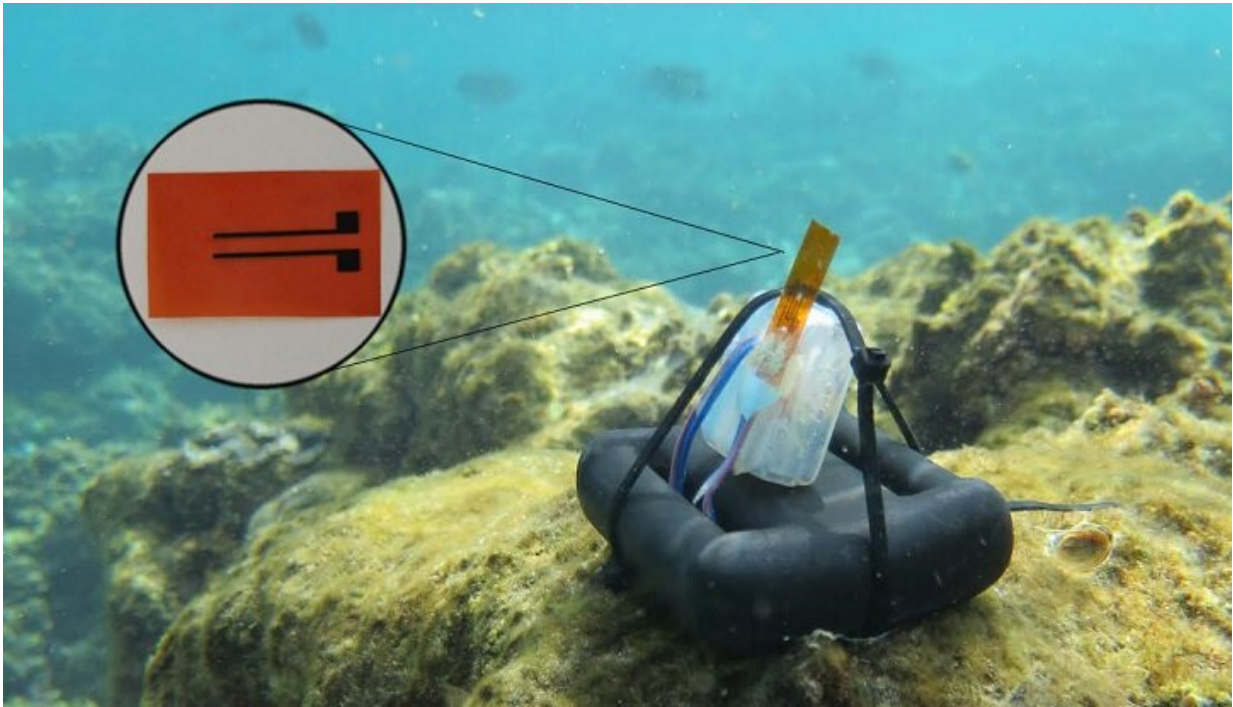

The salinity sensor was tested at the Al Fahal Reef in the Red Sea. Credit: Nathan R. Gerald

The team created the sensor from a flexible polymer sheet. Writing on the sheet using a [laser beam](#), the team heated targeted strips of the polymer, breaking down the polymer structure to produce conductive strips of graphene that form the electrodes. When operated at low frequency, biofouling caused the same conductance drop that had afflicted previous devices. But when it was operated at [high frequency](#), the team showed, biofouling had no effect on the performance and the sensor maintained a steady reading even after weeks in seawater. "We avoided the influence of foulants' recruitment on the surface of the electrodes, which is expected to solve long-term reliability issues," Kaidarova says.

The team plans to use the laser-induced graphene technique as a

versatile, inexpensive way to create integrated sensor platforms that can monitor temperature, pressure, salinity, pH and magnetic field. "The data collected from these versatile [sensors](#) are intended to be incorporated into Red Sea conservation management," Kaidarova says.

**More information:** Altynay Kaidarova et al. Flexible and Biofouling Independent Salinity Sensor, *Advanced Materials Interfaces* (2018). [DOI: 10.1002/admi.201801110](#)

Provided by King Abdullah University of Science and Technology

Citation: Marine sensor gets to grips with salt (2019, February 4) retrieved 6 August 2024 from <https://phys.org/news/2019-02-marine-sensor-salt.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--