


Elucidation of structural property in Li-ion batteries that deliver ultra-fast charging

March 12 2019

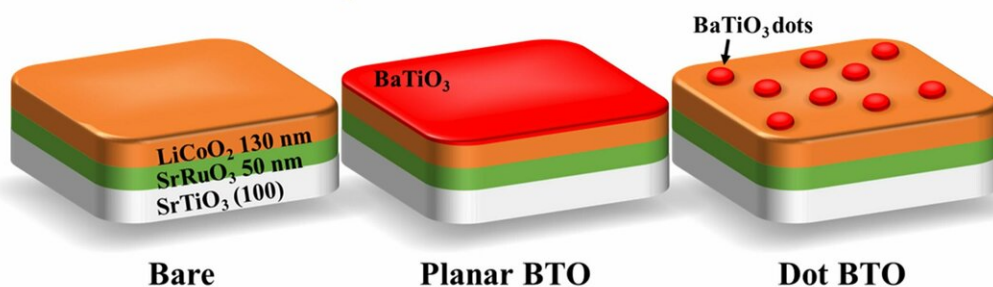

Three cathodes were fabricated: a standard bare one (left), one coated with a layer of BaTiO₃ (middle), and one coated with several BaTiO₃ nanodots (right). The one with the nanodots exhibited greatly enhanced performance. Credit: Nano Letters

Scientists at Tokyo Tech and Okayama University have greatly improved the performance of LiCoO₂ cathodes in Li-ion batteries by decorating them with BaTiO₃ nanodots. Most importantly, they elucidated the mechanism behind the measured results, concluding that the BaTiO₃ nanodots create a special interface through which Li ions can circulate easily, even at very high charge/discharge rates.


Today, modern advances in [electrical devices](#) and vehicles have created the need for improved batteries in terms of stability, rechargeability, and charging speeds. While Li-ion batteries (LIBs) have proven to be very

useful, it is not possible to charge them quickly enough with high currents without running into problems such as sudden decreases in cyclability and output capacity owing to their intrinsic high resistance and unwanted side reactions.


The negative effects of such unwanted reactions hinder LIBs using LiCoO_2 (LCO) as a cathode material. One of them involves the dissolution of Co^{4+} ions into the [electrolyte solution](#) of the battery during charge/discharge cycles. Another effect is the formation of a solid electrolyte interface between the active material and the electrode in these batteries, which hinders the movement of Li ions and thus degrades performance.

In a previous study, scientists reported that using materials with a high dielectric constant, such as BaTiO_3 (BTO) enhanced the high-rate performance of LCO cathodes. However, the mechanism behind the observed improvements was unclear. To shed light on this promising approach, a team of scientists from Tokyo Tech, led by Prof. Mitsuru Itoh, Dr. Shintaro Yasui and Mr. Sou Yasuhara, studied LCO cathodes with BTO applied in different ways to find out what happened at the BTO-LCO interface in more detail.

Bare

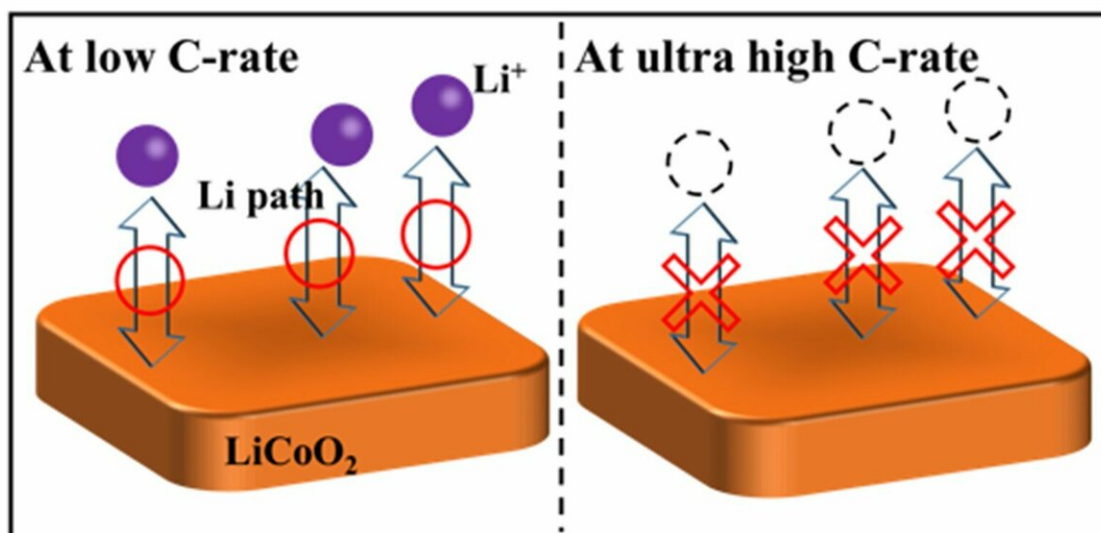

Dot BTO

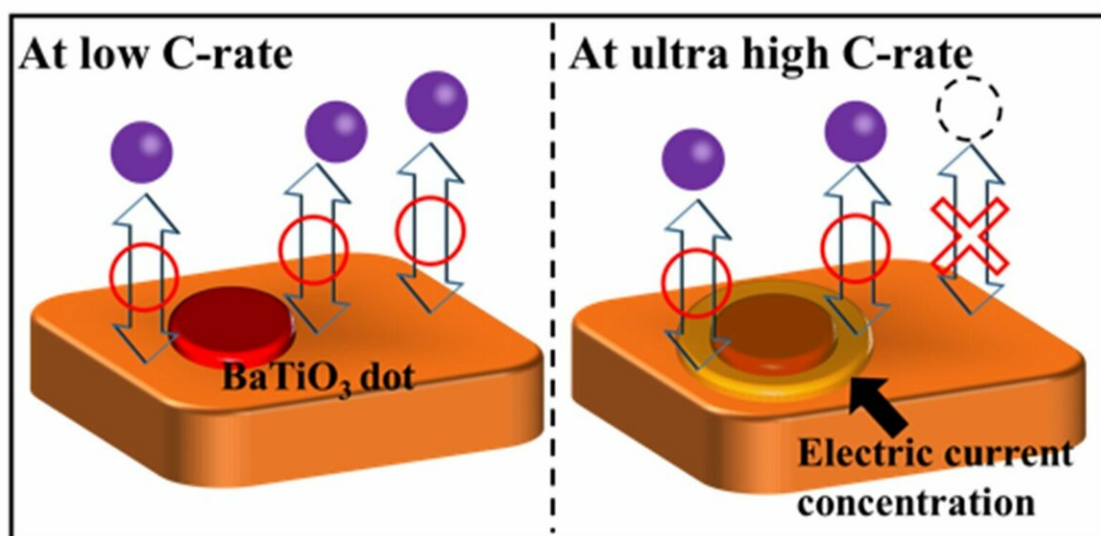

The BaTiO_3 nanodots concentrate electric current in a ring around them and create paths through which Li ions can pass, even at really high charge/discharge rates. Credit: Nano Letters

The team created three LCO cathodes: a bare one, one coated with a layer of BTO, and one covered with BTO nanodots (Figure 1). The team also modeled an LCO cathode with a single BTO nanodot and predicted that the current density close to the edge of the BTO nanodot was very high. This particular area is called the triple phase interface (BTO-LCO-electrolyte), and its existence greatly enhanced the electrical performance of the cathode covered with microscopic BTO nanodots.

As expected, after testing and comparing the three cathodes they prepared, the team found that the one with a layer of BTO dots exhibited a much better performance, both in terms of stability and discharge capacity. "Our results clearly demonstrate that decorating with BTO nanodots plays an important role in improving cyclability and reducing resistance," states Itoh. Realizing that the BTO dots had a crucial effect on the motility of Li ions in the [cathode](#), the team looked for an explanation.

After examining their measurements results, the team concluded that BTO nanodots create paths through which Li ions can easily intercalate/de-intercalate, even at very high charge/discharge rates (Figure 2). This is so because the electric field concentrates around materials with a high dielectric constant. Moreover, the formation of a solid electrolyte interface is greatly suppressed near the triple phase interface, which would otherwise result in poor cyclability. "The mechanism by which the formation of a solid electrolyte interface is inhibited near the triple phase [interface](#) is still unclear," remarks Itoh.

While much research on this topic remains to be done, the results are promising and hint at a new way of greatly improving LIBs. This could be a significant step for meeting the demands of modern and future devices.

More information: Sou Yasuhara et al, Enhancement of Ultrahigh

Rate Chargeability by Interfacial Nanodot BaTiO₃ Treatment on LiCoO₂ Cathode Thin Film Batteries, *Nano Letters* (2019). [DOI: 10.1021/acs.nanolett.8b04690](https://doi.org/10.1021/acs.nanolett.8b04690)

Provided by Tokyo Institute of Technology

Citation: Elucidation of structural property in Li-ion batteries that deliver ultra-fast charging (2019, March 12) retrieved 10 April 2024 from <https://phys.org/news/2019-03-elucidation-property-li-ion-batteries-ultra-fast.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.