


Scientists learn how to manage the properties of amorphous microwires

March 1 2019

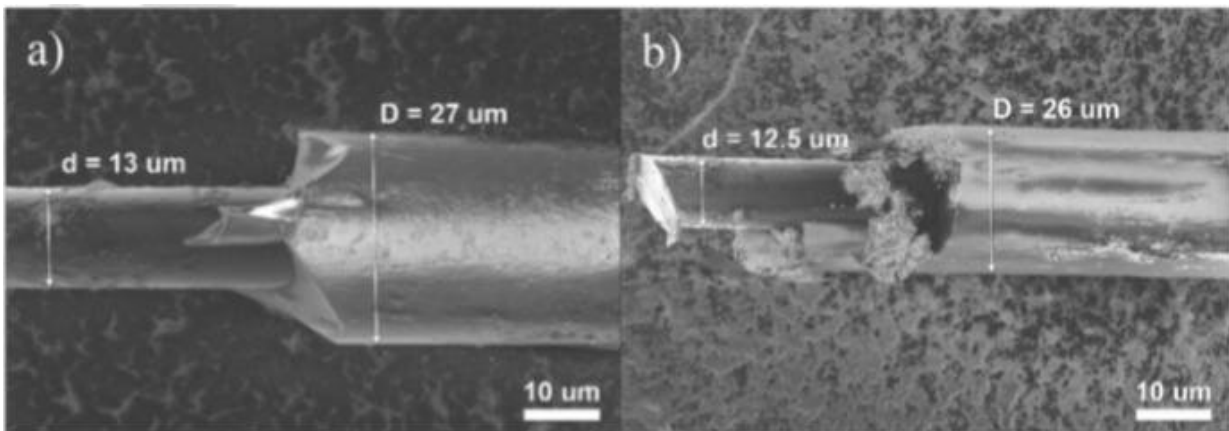

SEM-images of microwires. Credit: 10.1016/j.jmmm.2018.12.017

Amorphous ferromagnetic microwires are thin, glass-coated wires used to manufacture magnetic safety tags and in medicine. A team of physicists from Immanuel Kant Baltic Federal University and MISIS controlled their properties by adjusting internal mechanical stress. Their article was published in the *Journal of Magnetism and Magnetic Materials*.

Their static and dynamic properties of microwires have recently become the focus of studies, because these materials are easy and cheap to produce, and their unique magnetic properties can be easily managed both in the course of manufacture and sample processing. Currently,

microwires are widely used in magnetic safety tags, detectors, and in medicine for creating the state of hyperthermia.

Amorphous microwires can become magnetized. They also have a [domain structure](#) that consists of different domains with opposite magnetization directions. The border between them is called a domain wall. There are two mechanisms used to remagnetize ferromagnetic objects—domain wall propagation and magnetization vector turning. Amorphous ferromagnetic microwires manufactured from Fe-rich alloys are remagnetized using domain wall propagation. Control of this process is of interest from both scientific and practical points of view. Its dynamics can be regulated by choosing the composition of the alloy and the manufacture regime. The combination of these factors forms the distribution of internal mechanical stresses in a metal core which in turn determines the micromagnetic structure and the dynamics of domain wall propagation.

However, it is difficult to produce a [microwire](#) with specified [mechanical properties](#). A team of scientists from Immanuel Kant Baltic Federal University analyzed the application of stress in a metal core in the course of manufacturing microwires with similar diameters. To do so, they examined samples in different states: immediately after manufacture, after the removal of glass, and after additional annealing (heating a material up to certain temperature and keeping it at it for a required period of time followed by gradual cooling down to [room temperature](#)).

"We found that residual stresses in the wires with identical composition are determined not only by their geometry, as we supposed. We went back to basics of the process and demonstrated the importance of the production technology choice. We also showed differences in the internal stresses of similar wires and their considerable influence at static and dynamic magnetic properties of the [materials](#)," said Valeria

Rodionova, a co-author of the article, and the head of the laboratory of new [magnetic materials](#) at Baltic Federal University.

The study will improve the understanding of the properties of amorphous ferromagnetic microwires and broaden the areas of their use (e.g. in applications that require [domain](#) wall propagation control, as well as in data recording and reading devices).

More information: I. Baraban et al, Control of magneto-static and -dynamic properties by stress tuning in Fe-Si-B amorphous microwires with fixed dimensions, *Journal of Magnetism and Magnetic Materials* (2018). [DOI: 10.1016/j.jmmm.2018.12.017](https://doi.org/10.1016/j.jmmm.2018.12.017)

Provided by Immanuel Kant Baltic Federal University

Citation: Scientists learn how to manage the properties of amorphous microwires (2019, March 1) retrieved 25 April 2024 from <https://phys.org/news/2019-03-scientists-properties-amorphous-microwires.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--