


# Technique to make transparent polythene films as strong as aluminium

April 1 2019, by Alice Scott

---

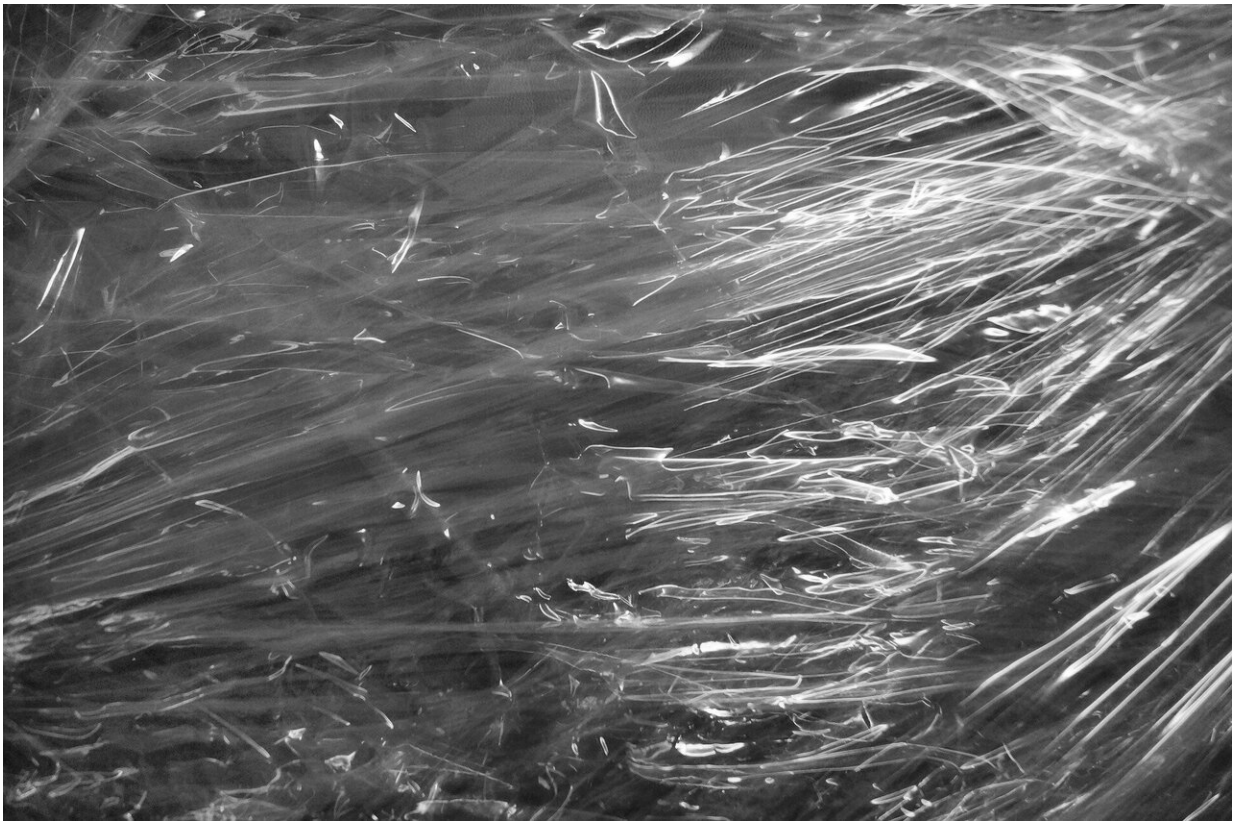

Credit: CC0 Public Domain

Research led by Professor Ton Peijs of WMG at the University of Warwick and Professor Cees Bastiaansen at Queen Mary University of London, has devised a processing technique that can create transparent

polythene film that can be stronger as aluminium but at a fraction of the weight, and which could be used in glazing, windscreens, visors and displays in ways that add strength and resilience while reducing weight.

In a new research paper entitled "Glass-like transparent [high strength](#) polyethylene films by tuning drawing temperature." Published online today—1st April 2019—in the journal *Polymer*, the authors show that after carefully selecting the type polythene and by tuning the temperature during the creation of oriented polythene films a balance can be created that produces a highly useful and lightweight [transparent material](#) with a significant [strength](#) and resilience approaching, and in some ways, exceeding that of metals.

Previously anyone looking to replace heavy and often brittle glasses with a transparent plastic have looked at conventional transparent plastics like polycarbonate (PC) and poly(methylmethacrylate) (PMMA) both of which possess relatively unsatisfactory mechanical performance compared to an engineering material like aluminium.

Current methods of creating high strength plastic films such as hot-drawing of [high-density polyethylene](#) (HDPE) can lead to materials that can compete or even out-perform traditional engineering materials like metals.

"The microstructure of polymers before drawing very much resembles that of a bowl of cooked spaghetti or noodles, while after stretching or drawing the molecules become aligned in a way similar to that of uncooked spaghetti, meaning that they can carry more load" explains Yunyin Lin, a Ph.D. student in Professors Peijs and Bastiaansen's team.

However, drawn polythene materials normally have an opaque appearance due to defects and voids introduced by the drawing process, limiting applications where both mechanical properties and optical

transparency are required.

Some success has recently been achieved by using highly specific additives in hot-drawn HDPE materials that can then produce 90% transparency while giving high strength. However, the research team led by Professors Peijs and Bastiaansen have now developed a new post-manufacturing technique for HDPE that endows strength and resilience while preserving transparency without using additives.

The researchers took HDPE polythene sheets and drew out these sheets at a range of temperatures below the melting temperature of HDPE. By tuning the drawing [temperature](#) they could achieve a transparency of 90% in the visible range. However, the best balance between strength and transparency was achieved at drawing temperatures between 90 and 110 degrees centigrade.

Professor Ton Peijs of WMG at the University of Warwick said:

"We expect greater polymer chain mobility at these high drawing temperatures to be responsible for creating fewer defects in the drawn films, resulting in less light scattering by defects and therefore a higher clarity"

The highly transparent films possess a maximum resilience or Young's Modulus of 27 GPa and a maximum tensile strength of 800 MPa along the drawing direction, both of which are more than 10 times higher than those of PC and PMMA plastics. For comparison, aluminium has a Young's Modulus of 69 GPa and aerospace grade aluminium alloy can have tensile strengths up to around 500 MPa. However, polythene has a density of less than 1000 kg/m<sup>3</sup> while aluminium has a density of around 2700 kg/m<sup>3</sup>, meaning that on weight basis these high strength transparent polymer films can outperform such metals.

Professor Ton Peijs in WMG at the University of Warwick concludes that:

"Our results showed that a wide processing window ranging from 90 °C to 110 °C can be used to tailor the required balance between optical and mechanical performance. It is anticipated that these lightweight, low-cost, highly transparent, high strength and high stiffness HDPE [films](#) can be used in laminates and laminated composites, replacing or strengthening traditional inorganic or polymeric glass for applications in automotive glazing, buildings, windshields, visors, displays etc."

**More information:** Yunyin Lin et al. Glass-like transparent high strength polyethylene films by tuning drawing temperature, *Polymer* (2019). [DOI: 10.1016/j.polymer.2019.03.036](https://doi.org/10.1016/j.polymer.2019.03.036)

Provided by University of Warwick

Citation: Technique to make transparent polythene films as strong as aluminium (2019, April 1) retrieved 27 April 2024 from <https://phys.org/news/2019-04-technique-transparent-polythene-strong-aluminium.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--