

Researchers capture microscopic manufacturing flaws via high-speed X-ray movies

June 17 2019

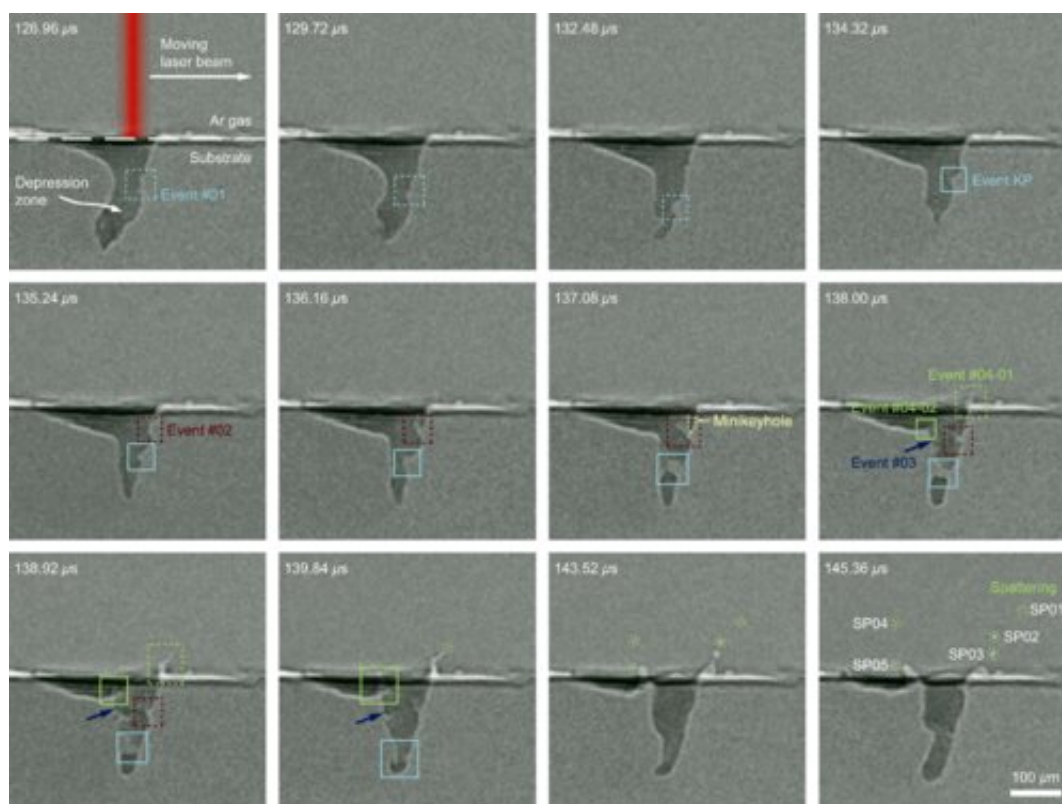


Figure 1 MHz x-ray images of metal spattering of Ti-6Al-4V during laser processing. Four events can be extracted. Event no. 01 (sky blue dashed rectangles): A protrusion forms at the top surface and runs down along the front keyhole wall, accompanied by the keyhole morphology changing from a J-like shape to a reverse-triangle-like shape. Event no. 02 (purple dashed rectangles): A following protrusion appears, grows, and collapses around the horizontal center of the keyhole. A minkeyhole on top of the protrusion is outlined by a light yellow dashed curve. Event no. 03 (dark blue arrows): The local curvature on the

rear keyhole wall changes. Event no. 04 (light green dashed and solid rectangles): Melt ligaments form, elongate, and break up into spatters (light green dashed circles numbered SP01–SP05). A separate event KP (sky blue solid rectangles) describes the formation and vanishing of a keyhole pore. The laser beam scans from left to right, with spot size of approximately $80\mu\text{m}$ ($1/e^2$), power of 210 W, and scanning speed of 500mm/s. The imaging frame rate is 1.087×10^6 frames per second, synchronized with the x-ray pulses. Each individual image is generated by a single x-ray pulse (pulse width approximately 100 ps). All images shown here are background corrected using the images collected before the laser melting. The contrast is then reversed to highlight the events around the keyhole. Frame-by-frame images as well as schematic illustrations are documented in the Supplemental Material Figs. S3 and S4 and Video S2 [6].

Microscopic defects that occur in laser-based manufacturing of metal parts can lead to big problems if undetected, and the process of fixing these flaws can increase the time and cost of high-tech manufacturing. But new research into the cause of these flaws could lead to a remedy.


Researchers from Missouri S&T, Argonne National Laboratory and the University of Utah created high-speed X-ray "movies" of a manufacturing phenomenon known as [laser](#) spattering. Laser spattering refers to the ejection of molten metal from a pool heated by a [high-power laser](#) during laser-based manufacturing processes, such as laser welding and laser-additive manufacturing. These laser [manufacturing](#) technologies are used to fabricate parts for use in a variety of industries, including aerospace, the automotive industry, healthcare and construction.

The researchers describe their findings in a paper published today (Friday, June 14, 2019) in the journal *Physical Review X*.

Using X-ray imaging, the researchers captured the spattering behavior of

a titanium alloy known as Ti-6Al-4V during fabrication. Their microscopic movies reveal "a novel mechanism of laser spattering—the bulk explosion of a tongue-like protrusion" that forms in one region of the metal, the researchers say in their paper, titled "Bulk explosion induced metal spattering during laser processing."

] "The newly discovered mechanism will guide the development of approaches to mitigate defect formation in welds and additively manufactured parts," says Dr. Lianyi Chen, assistant professor of mechanical and [aerospace engineering](#) at Missouri S&T and one of the paper's corresponding authors.

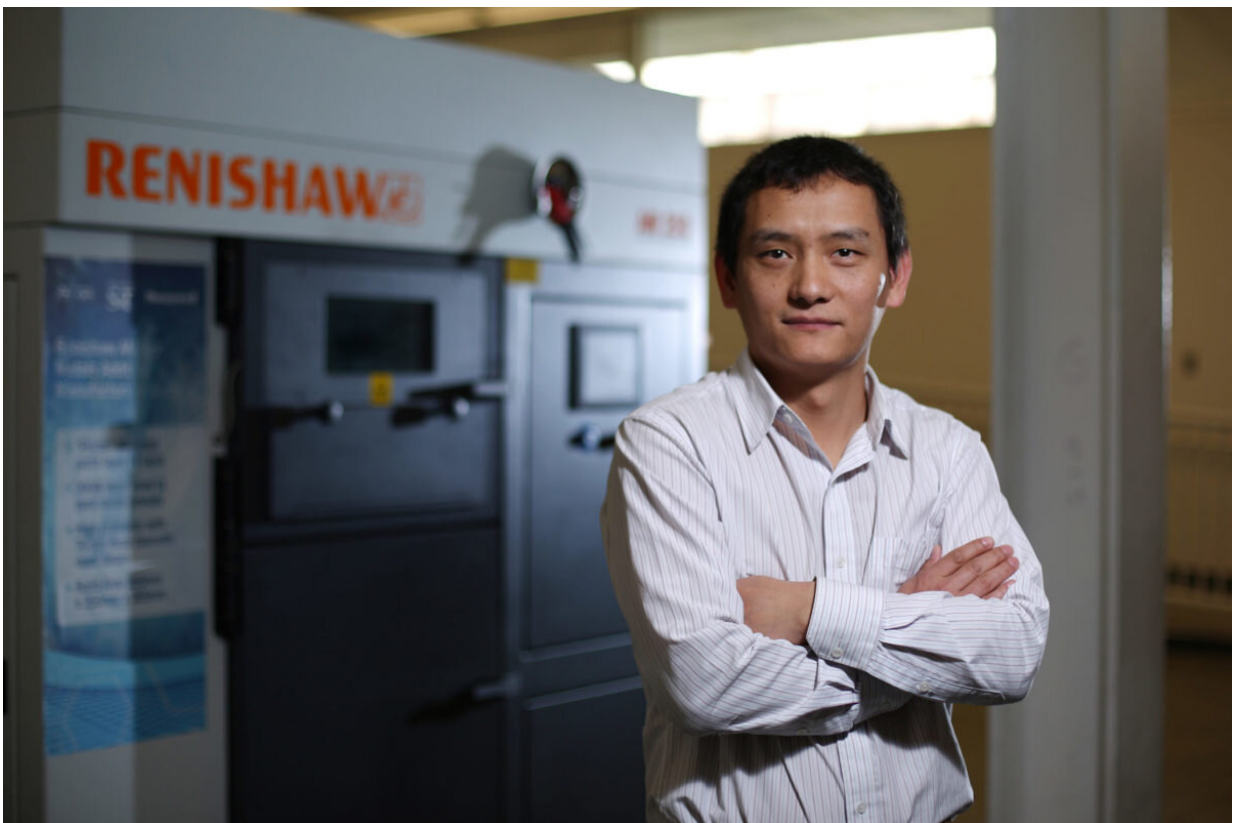

Dr. Lianyi Chen, Missouri S&T assistant professor of mechanical and aerospace engineering, in his lab. Photo by Sam O'Keefe/Missouri S&T

Chen collaborated with Dr. Tao Sun's team at Argonne National Laboratory and Dr. Wenda Tan's team at the University of Utah on the research. The group created the images through the use of a high-energy synchrotron X-ray at Argonne National Lab along with [image analysis](#) and numerical simulations. Researchers at the Argonne facility employ X-ray scattering techniques to study materials.

"The high penetration power of hard X-rays and high resolutions of the imaging technique enable us, for the first time ever, to connect the spattering behavior above the surface with dynamics below the surface and inside the titanium sample," Chen says.

More information: Cang Zhao et al. Bulk-Explosion-Induced Metal Spattering During Laser Processing, *Physical Review X* (2019). [DOI: 10.1103/PhysRevX.9.021052](#)

Provided by Missouri University of Science and Technology

Citation: Researchers capture microscopic manufacturing flaws via high-speed X-ray movies (2019, June 17) retrieved 10 April 2024 from <https://phys.org/news/2019-06-capture-microscopic-flaws-high-speed-x-ray.html>

<p>This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.</p>
--