


Experimental mini-accelerator achieves record energy

July 11 2019

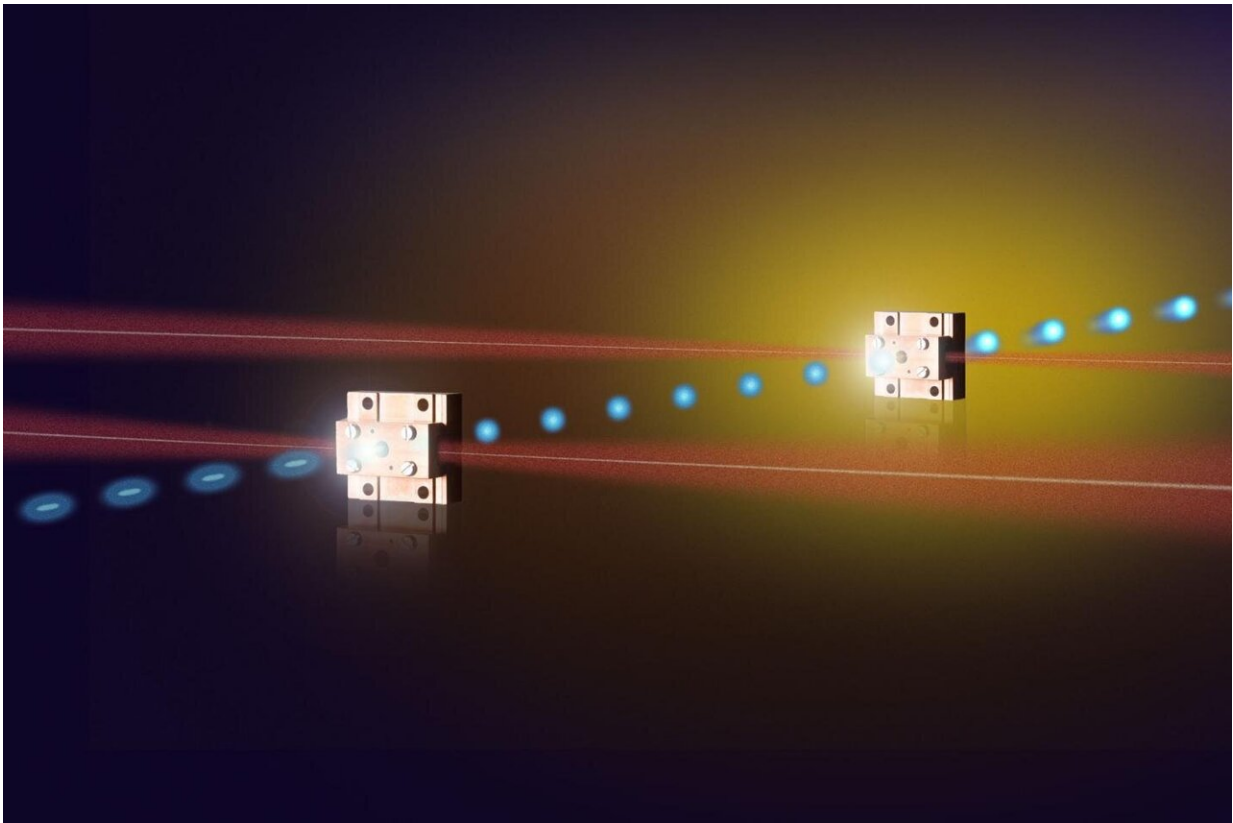

The two-stage miniature accelerator is operated with terahertz radiation (shown here in red). In a first step (left) the electron bunches (shown in blue) are compressed, in a second step (right) they are accelerated. The two individual elements are each about two centimeters wide. Credit: DESY, Gesine Born

Scientists at DESY have achieved a new world record for an

experimental type of miniature particle accelerator: For the first time, a terahertz powered accelerator more than doubled the energy of the injected electrons. At the same time, the setup significantly improved the electron beam quality compared to earlier experiments with the technique, as Dongfang Zhang and his colleagues from the Center for Free-Electron Laser Science (CFEL) at DESY report in the journal *Optica*. "We have achieved the best beam parameters yet for terahertz accelerators," said Zhang.

"This result represents a critical step forward for the practical implementation of terahertz-powered accelerators," emphasized Franz Kärtner, who heads the ultrafast optics and X-rays group at DESY. Terahertz radiation lies between infrared and microwave frequencies in the electromagnetic spectrum and promises a new generation of compact particle accelerators. "The wavelength of terahertz radiation is about a hundred times shorter than the [radio waves](#) currently used to accelerate particles," explained Kärtner. "This means that the components of the [accelerator](#) can also be built to be around a hundred times smaller." The terahertz approach promises lab-sized accelerators that will enable completely new applications for instance as compact X-ray sources for materials science and maybe even for medical imaging. The technology is currently under development.

Since terahertz waves oscillate so fast, every component and every step has to be precisely synchronized. "For instance, to achieve the best [energy](#) gain, the electrons have to hit the terahertz field exactly during its accelerating half cycle," explained Zhang. In accelerators, particles usually do not fly in a continuous [beam](#), but are packed in bunches. Because of the fast-changing field, in terahertz accelerators these bunches have to be very short to ensure even acceleration conditions along the bunch.

"In previous experiments the electron bunches were too long", said

Zhang. "Since the terahertz field oscillates so quickly, some of the electrons in the bunch were accelerated, while others were even slowed down. So, in total there was just a moderate average energy gain, and, what is more important, a wide energy spread, resulting in what we call poor beam quality." To make things worse, this effect strongly increased the emittance, a measure for how well a particle beam is bundled transversally. The tighter, the better—the smaller the emittance.

To improve the beam quality, Zhang and his colleagues built a two-step accelerator from a multi-purpose device they had developed earlier: The Segmented Terahertz Electron Accelerator and Manipulator (STEAM) can compress, focus, accelerate and analyze electron bunches with terahertz radiation. The researchers combined two STEAM devices in line. They first compressed the incoming electron bunches from about 0.3 millimetres in length to just 0.1 millimetres. With the second STEAM device, they accelerated the compressed bunches. "This scheme requires control on the level of quadrillionths of a second, which we achieved," said Zhang "This led to a fourfold reduction of the energy spread and improved the emittance sixfold, yielding the best beam parameters of a terahertz accelerator so far."

The net energy gain of the electrons that were injected with an energy of 55 kiloelectron volts (keV) was 70 keV. "This is the first energy boost greater than 100 percent in a terahertz powered accelerator," emphasised Zhang. The coupled device produced an accelerating field with a peak strength of 200 million Volts per metre (MV/m) - close to state-of-the-art strongest conventional accelerators. For practical applications this still has to be significantly improved. "Our work shows that even a more than three times stronger compression of the electron bunches is possible. Together with a higher terahertz energy, acceleration gradients in the regime of gigavolts per metre seem feasible," summarized Zhang. "The [terahertz](#) concept thus appears increasingly promising as a realistic option for the design of compact electron accelerators."

More information: Dongfang Zhang et al, Femtosecond phase control in high-field terahertz-driven ultrafast electron sources, *Optica* (2019).
[DOI: 10.1364/OPTICA.6.000872](https://doi.org/10.1364/OPTICA.6.000872)

Provided by Deutsches Elektronen-Synchrotron

Citation: Experimental mini-accelerator achieves record energy (2019, July 11) retrieved 18 April 2024 from <https://phys.org/news/2019-07-experimental-mini-accelerator-energy.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.