


Developing electrically active materials to repair damaged hearts

October 8 2019

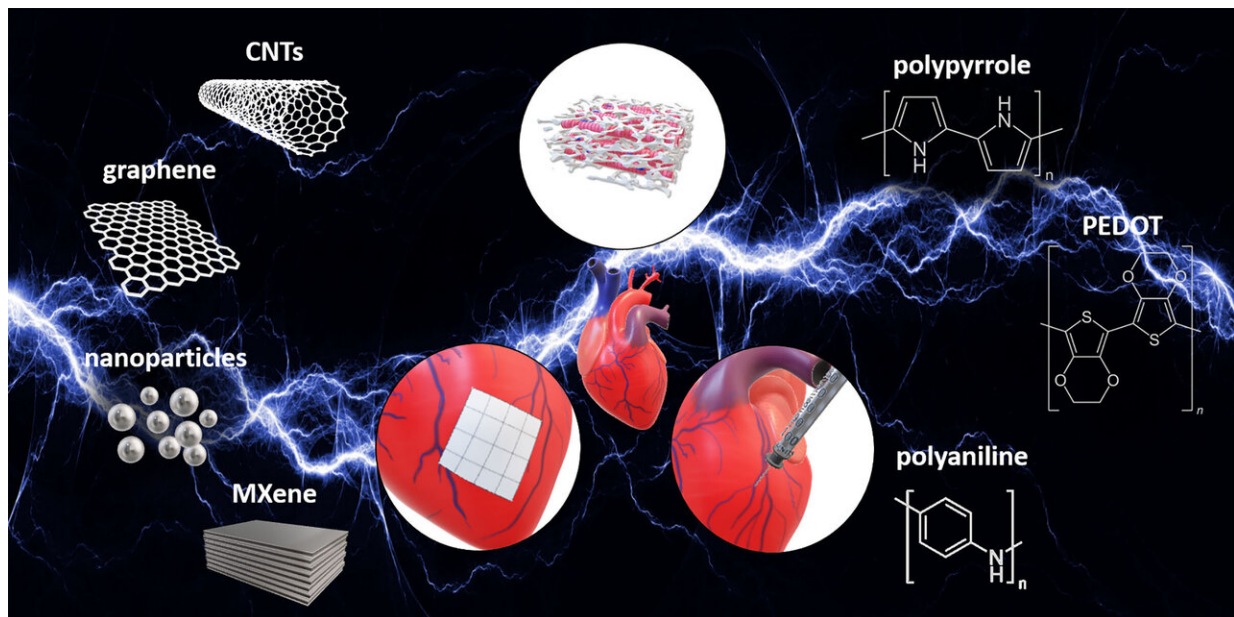

Electrically conductive biomaterials and their applications for cardiac tissue engineering. In this week's APL Bioengineering, investigators review the use of electrically conductive biomaterials for heart repair and treatment. Credit: Michael Monaghan, Trinity College Dublin

When a heart attack occurs, muscle in the heart tissue can be scarred, interfering with electrical activity necessary for healthy heart function. Drug treatments are available that alleviate further damage, but these don't lead to tissue regeneration. Using artificial materials to patch or

rebuild damaged parts has been tried but only recently has work focused on the electrical properties needed for proper cardiac operation.

In this week's *APL Bioengineering* investigators review the use of electrically conductive biomaterials for heart repair and treatment. The investigators considered three ways these materials can be used: to create scaffolds upon which heart cells might regenerate, to make electrically conductive patches to repair damaged tissue, and to produce injectable hydrogels to carry drugs to specific cardiac regions.

A healthy heart beats when cells in the myocardium contract. The myocardium is composed of precisely oriented fibers, so the contraction occurs in a twisting fashion. The contractions are triggered by an [electrical signal](#) from specialized cells known as the sinoatrial node. This signal is propagated through the heart muscle to the myocardium, unless it encounters scar tissue. The scar, which acts as an electrical insulator, may stop this signal, interfering with contraction.

Investigators are now developing electrically conductive materials to overcome this problem with [scar tissue](#) by matching the electrical conductance properties of native myocardium. The types of materials reviewed in this paper include small tubes or sheets of carbon; tiny metallic nanoparticles, usually of silver or gold; metal carbides, including the widely used titanium carbide; and polymers (plastics) doped with special substances that allow them to conduct electricity.

Any foreign material introduced into the body must be biocompatible to avoid both short- and long-term toxicity. Some toxicity issues are subtle. Silver nanoparticles, for example, have a size-dependent toxicity when delivered to the lungs. For many of these materials, toxicity, particularly long-term, has not yet been evaluated. However, some of these substances may impart beneficial effects. For example, certain metal carbides known as MXene may be anti-inflammatory.

Co-author Michael Monaghan suggests "a polymer known as PEDOT may be the most suitable for electrically conductive grafts or scaffolds, since it can be manufactured into 3-D structures without different supporting materials." The investigators also suggest some of PEDOT's toxic properties might be prevented by more fully purifying the material when it is prepared. Further study is needed.

More information: "The rationale and emergence of electroconductive biomaterial scaffolds in cardiac tissue engineering," *APL Bioengineering*, DOI: [10.1063/1.5116579](https://doi.org/10.1063/1.5116579)

Provided by American Institute of Physics

Citation: Developing electrically active materials to repair damaged hearts (2019, October 8) retrieved 28 April 2024 from <https://phys.org/news/2019-10-electrically-materials-hearts.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
