

Established mass production technology for solid-solution alloy nanoparticles

November 7 2019

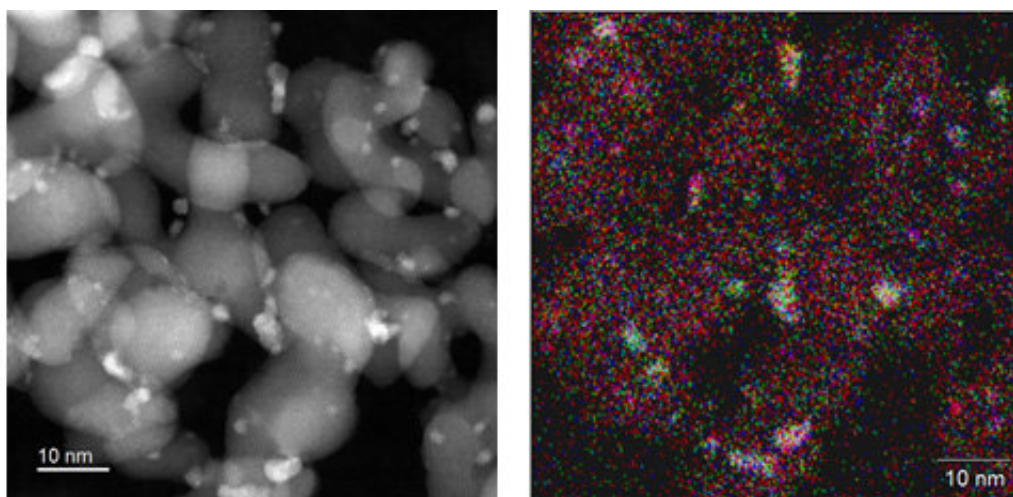


Fig. 1 STEM-EDX analysis of ternary solid-solution alloy nanoparticles. Alloy solution state evaluation. The 10nm size particles are a carrier, and the 1 to 2nm particles adhering to the carrier are solid-solution alloy nanoparticles. In the element distribution image, the three elements are colored red, blue, and green, and particles that are completely uniformly mixed are represented in white.

In the JST Strategic Basic Research Programs, Furuya Metal and Professor Hiroshi Kitagawa, Graduate School of Science, Kyoto University, have developed mass production technology that enables the continuous synthesis of several nm solid-solution alloy particles, which had previously been difficult to achieve. With this technology, we succeeded in achieving a stable and continuous synthesis of 1nm-class solid-solution alloy nanoparticles and their supported catalysts, which

were difficult to obtain using general methods of liquid phase reduction reaction (Fig. 1).

In the conventional methods, when we try mass-producing solid-solution alloy nanoparticles, the mixing method of elements is not uniform and the particle size distribution is widened, making it difficult to synthesize continuously with good quality and stability. In order to realize mass production technology, we have newly developed a continuous-flow production system (Fig. 2) that applies the solvothermal synthesis method and introduced it to Furuya Metal Co., Ltd. This equipment enables continuous production while maintaining the quality of solid-solution alloy nanoparticles, and we are aiming for mass production based on this equipment configuration.

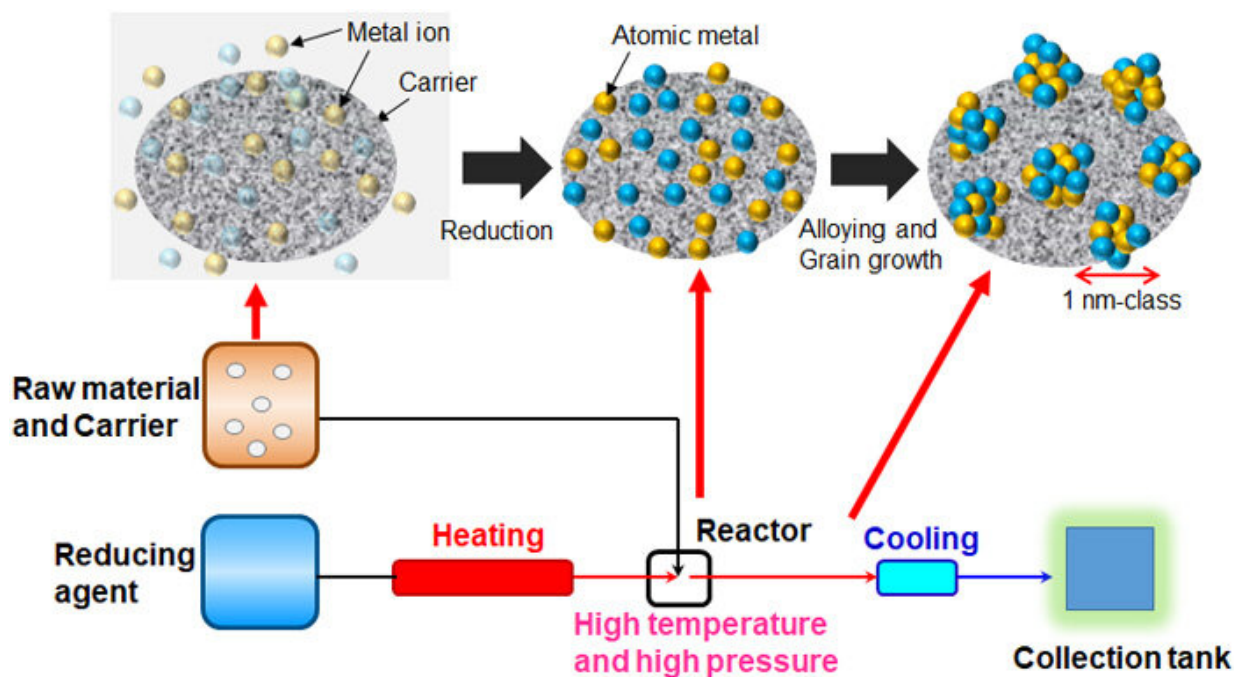


Fig. 2 Schematic diagram of solvothermal continuous flow manufacturing equipment. The solution in which the raw material and carrier are highly dispersed, and the reducing agent heated using the heater are mixed in the

reactor at high temperature and high pressure, and the metal ions are reduced to metal atoms on the carrier. After that, metal atoms grow on the carrier at the same time as alloying, but the mixed solution is cooled rapidly, and the aggregation of particles is suppressed. As a result, we can synthesize a catalyst with 1nm class solid-solution alloy nanoparticles supported on a carrier.

The newly developed solid-solution alloy nanoparticles by this synthesis device is a new alloy made of metals that had been impossible to mix together. Furthermore, it is well known in many research fields including catalytic science that the physical and chemical properties of alloys dramatically change by reducing to the nanoscale. The solid-solution alloy nanoparticles are considered as innovative catalysts that purify various exhaust gases and efficiently convert raw materials into basic chemicals and energy. Therefore, they will contribute greatly to the realization of a sustainable society in environmental purification and manufacturing technologies that emit less carbon dioxide.

In fact, it is already under evaluation process as an exhaust gas purification catalyst for automobiles and chemical process catalysts and we are promoting its implementation in the society in collaboration with domestic and foreign companies and research institutions.

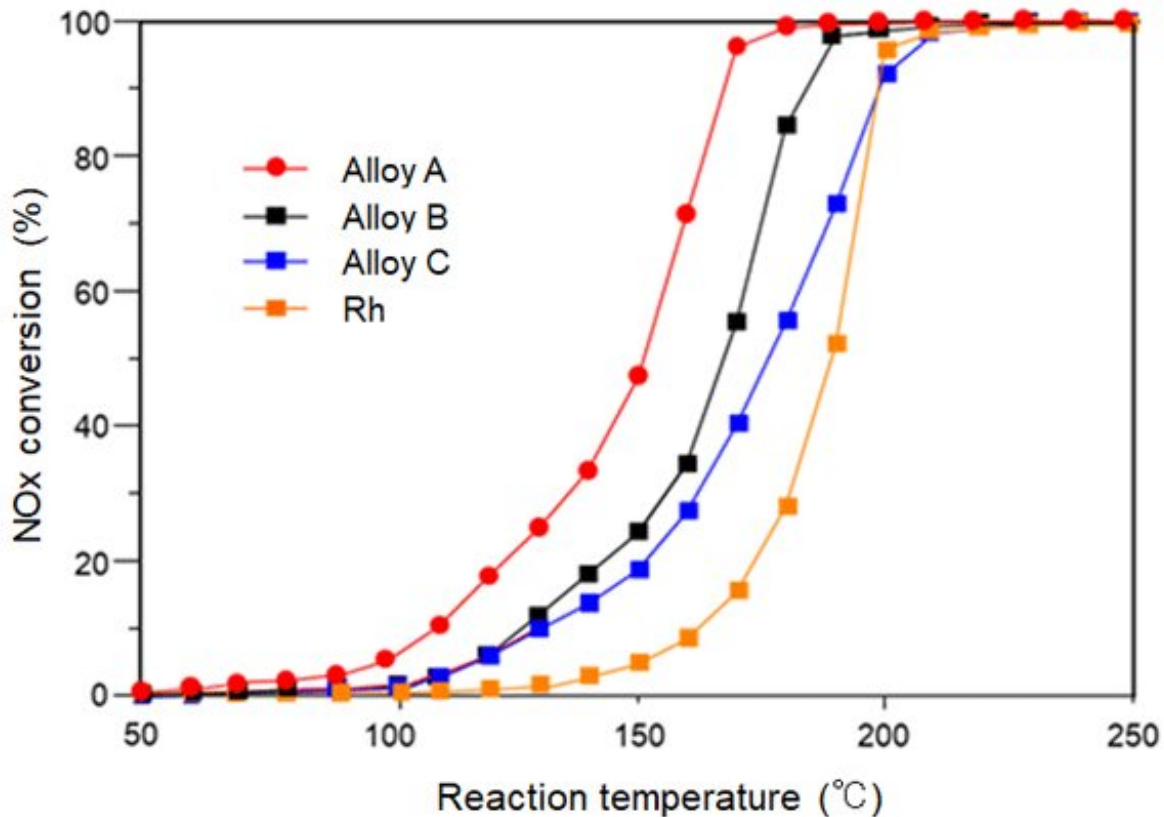


Fig. 3 Comparison of purification performance of nitrogen oxides (NO_x). Alloys A and B are ternary solid-solution alloy nanoparticles wherein three types of elements are mixed. A and B have different types of elements. Alloy C is a binary solid-solution alloy nanoparticles mixed with two kinds of elements.

Fig. 3 shows the results of a purification performance test for nitrogen oxides (NO_x) contained in an automobile exhaust gas. We have succeeded in developing an inexpensive catalyst that is far superior to [rhodium](#) (Rh), which is currently used as the best catalyst, and that shows activity at low temperatures. Automotive exhaust gas purification catalysts are good at exhaust gas purification performance in the temperature range around 600°C, and there has been a great demand for improvement in exhaust gas purification performance when the engine is

not immediately warmed (cold start) after it is start. The exhaust emission regulations for automobiles have been becoming stricter year by year, and even at such cold start, it is essential to improve the low-temperature activity that satisfies the regulation standards. In the evaluation of Fig. 3, the activity of Rh catalyst was also evaluated as a comparison; however, the reaction of alloy A synthesized using this technology started at a low temperature of approximately 50°C. The NO_x conversion at 160°C of the solid-solution alloy nanoparticles was more than seven times higher than that of Rh, indicating it is an innovative one.

By further applying this technology, it is expected to development of new solid-solution alloy nanoparticles materials that were difficult to fabricate, and practical use of solid-solution alloy [nanoparticles](#) materials that had been without [mass production](#) technology.

Provided by Japan Science and Technology Agency

Citation: Established mass production technology for solid-solution alloy nanoparticles (2019, November 7) retrieved 12 July 2024 from <https://phys.org/news/2019-11-mass-production-technology-solid-solution-alloy.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.