

# Nanowire detects Abrikosov vortices

December 9 2019

---




Olga Skryabina, a researcher at the Laboratory of Topological Quantum Phenomena in Superconducting Systems, MIPT, is monitoring contact-to-chip microwelding. Credit: Evgeniy Pelevin, MIPT Press Office

Researchers from the Moscow Institute of Physics and Technology, Lomonosov Moscow State University, and the Institute of Solid State Physics of the Russian Academy of Sciences have demonstrated the

possibility of detecting Abrikosov vortices penetrating through a superconductor-ferromagnet interface. The device considered in their study, published in *Scientific Reports*, is a ferromagnetic nanowire with superconductive electrodes connected to it.


Superconductors are materials that have the property of losing [electrical resistance](#) below a certain critical temperature  $T_c$ . Another astonishing property of superconductors is magnetic field expulsion (levitation). This effect results from a current flowing over the superconductor surface, shielding the magnetic field. There are also type II superconductors, which are penetrable for the magnetic flux in the form of quantized vortices at a temperature below critical. This phenomenon was named after Alexey Abrikosov, who originally predicted it. An Abrikosov vortex is a superconducting current vortex with a nonsuperconducting core that carries a magnetic flux quantum.

Olga Skryabina, the first author of the paper and a researcher at the MIPT Laboratory, says: "The research objective was studying the co-existence of antagonistic phenomena in 1-D superconductor-ferromagnet systems. Such systems have recently been of great interest due to their strong magnetic anisotropy with various dimensional and spin effects. These phenomena make such systems a promising choice for functional hybrid nano-devices, e.g., superconducting current converters, spin valves, magnetoresistive RAM. We connected a ferromagnetic nickel nanowire to superconducting niobium electrodes."

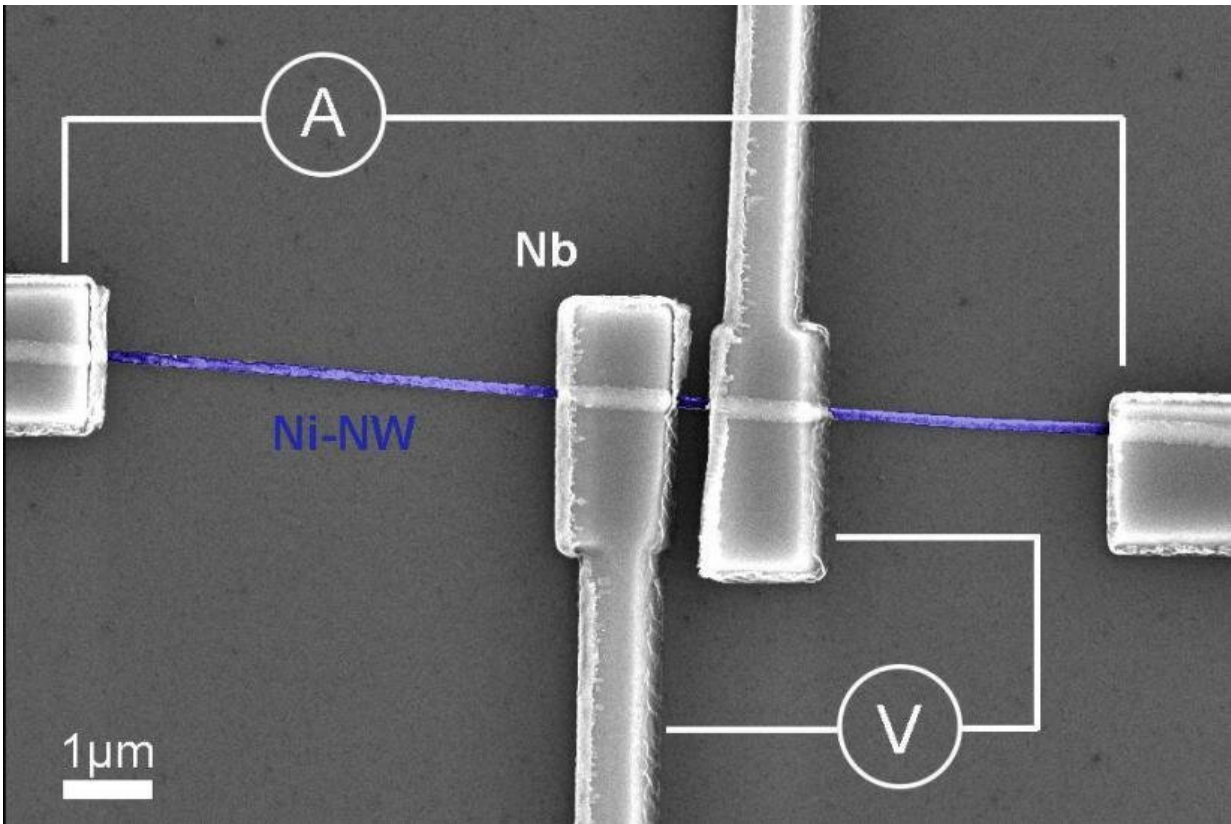

The structure microphoto. Grey at the center: superconducting niobium electrodes; blue: a ferromagnetic nickel nanowire. Graduation: 1  $\mu\text{m}$ . A and V (ammeter and voltmeter) indicate the type of current passing through the sample. Credit: O. V. Skryabina et al., Scientific Reports


The researchers have investigated a system of two superconducting niobium electrodes connected by a nickel nanowire (Figure 1). It has been found that as the magnetic field varies, the nanowire resistance strongly depends on the effects occurring at the superconductor-ferromagnet boundary.

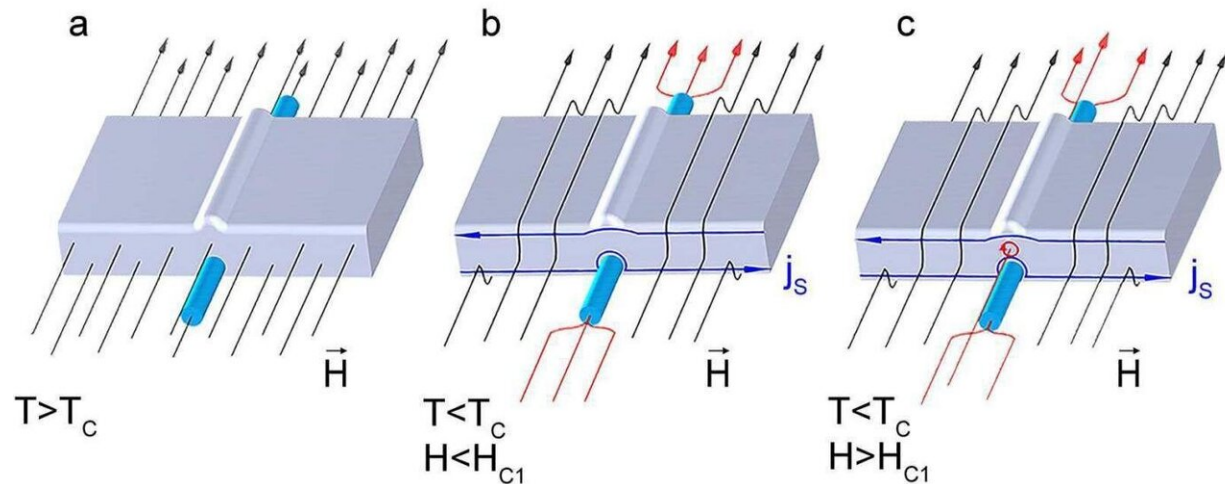

The processes occurring in the niobium (grey block) / nickel nanowire (blue cylinder) system under various ambient conditions. (a) The temperature is above critical. The system is in its normal state, the magnetic field (black arrow) is passing through the entire sample. (b) The temperature is below critical. When  $H < H_{c1}$  is exceeded, an Abrikosov vortex penetrates the niobium (marked with the red circle.) . Credit: O. V. Skryabina et al., Scientific Reports

First, the physicists considered the system in its normal state, when the temperature is above the critical one, and the magnetic field equally penetrates all the parts of the structure (Figure 2a.) The sample resistance did not change significantly with the increase of the magnetic field strength. Then the researchers lowered the temperature below the critical value. The niobium electrodes transitioned into a superconducting state, and their resistance dropped to zero. At the same time, the experimenters observed a drastic rise of the system resistance. The only explanation for this was the contribution of the superconductor-ferromagnet boundaries to the resistance. Concurrently, the niobium started conducting shielding currents, and the superconductor began expelling the magnetic field (Figure 2b). These phenomena result in unusual sawtooth magnetic resistance curves, and a shift relative to

various sweeps (Figure 3.)

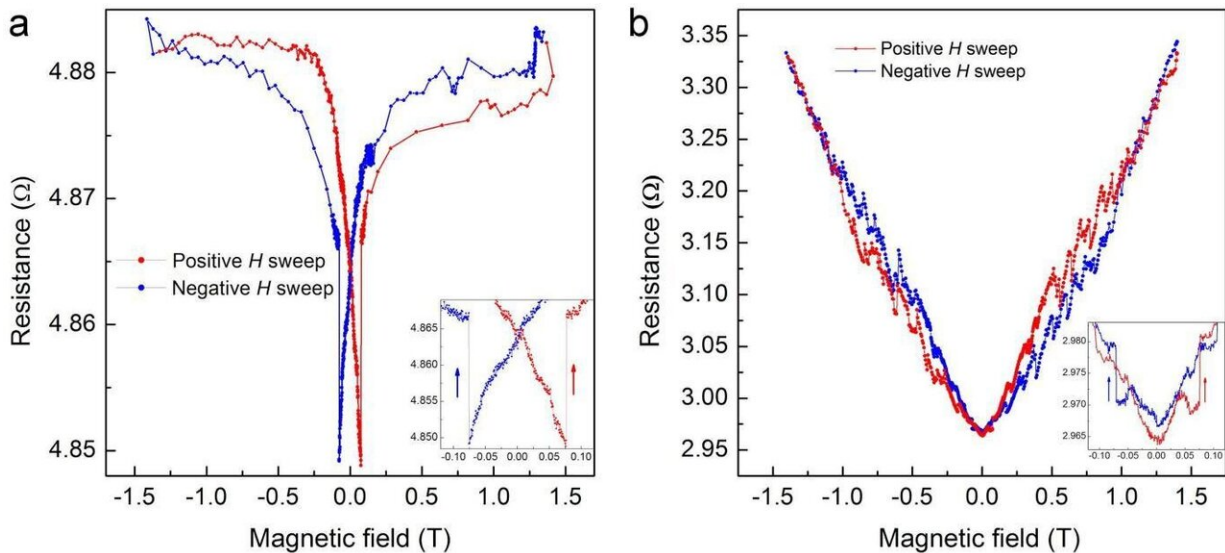

Specimen resistance vs. external magnetic field strength. The blue and red colors show the magnetic field sweep direction. (a) The temperature is above critical. The system is in its normal state, the system resistance variation is low (mostly due to the nickel nanowire reversal magnetization.) (b) The temperature is below the critical superconducting transition temperature. The system resistance variation is greater by an order of magnitude. The curve is sawtooth-shaped with resistance surges corresponding to the Abrikosov vortex penetration/exit. The boxes on both diagrams are enlarged detailed views in the nanowire reversal magnetization range. Credit: O. V. Skryabina et al., Scientific Reports

Olga Skryabina continues: "We placed the sample in a magnetic field parallel to the nanowire centerline. It was found that by measuring the sample resistance under such conditions, we can detect the moment when a magnetic flux quantum enters or exists a superconducting."

A vortex penetration and exit into/from the niobium (Figure 2c) cause

the sawtooth electrical resistance. The nickel nanowire in the system acts like a lightning rod that "attracts" the [magnetic field](#). A contact with it weakens the [niobium](#) electrode superconductivity, and, thus, localizes the Abrikosov vortices penetration point. The research demonstrates an immense difference between these superconducting chains and conventional electric circuits. There is a need for more research of hybrid superconductor devices to develop more advanced superconducting digital and quantum computers, and supersensitive sensors.

**More information:** O. V. Skryabina et al, Anomalous magneto-resistance of Ni-nanowire/Nb hybrid system, *Scientific Reports* (2019). DOI: [10.1038/s41598-019-50966-8](https://doi.org/10.1038/s41598-019-50966-8)

Provided by Moscow Institute of Physics and Technology

Citation: Nanowire detects Abrikosov vortices (2019, December 9) retrieved 16 August 2024 from <https://phys.org/news/2019-12-nanowire-abrikosov-vortices.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.
---