

Simultaneous emission of orthogonal handedness in circular polarization

December 13 2019

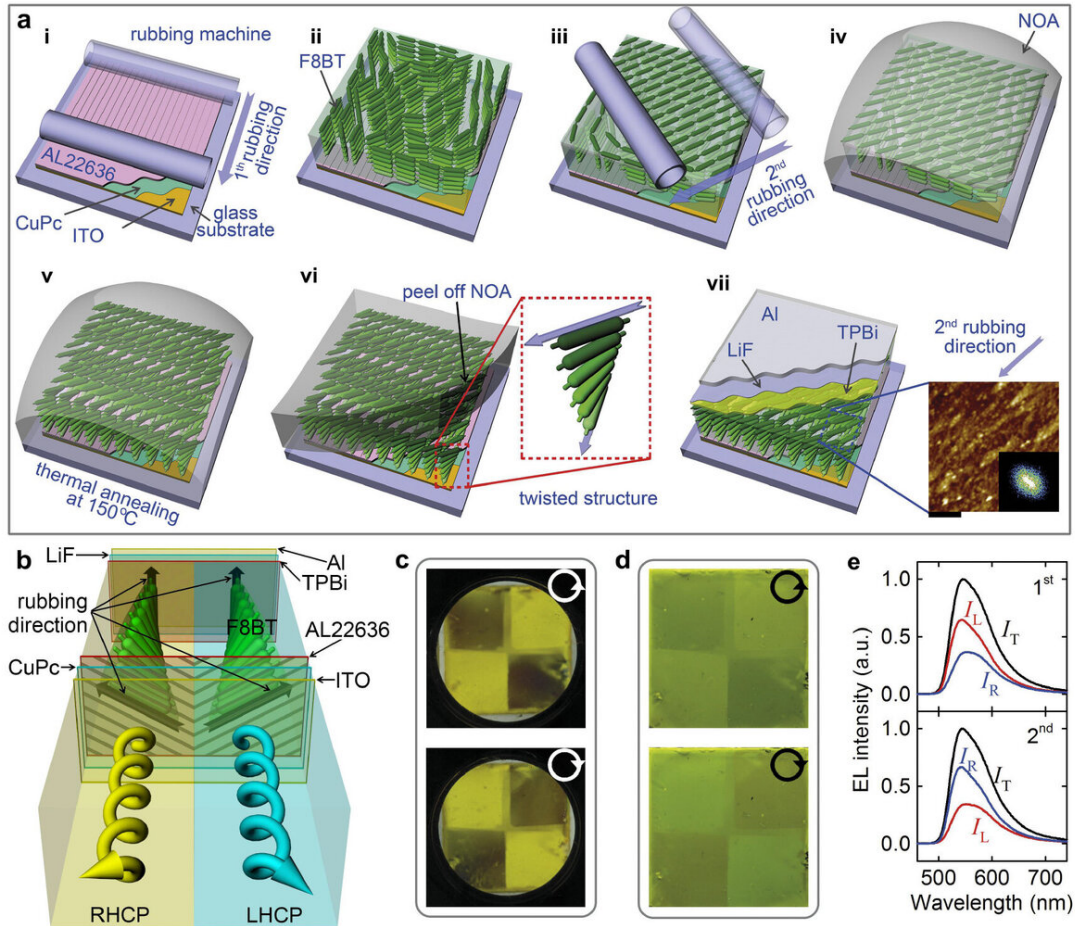


Figure | Simultaneously emitting device of orthogonal circular

polarization. **a**, schematic diagrams of the fabrication process of the circular polarization-emitting device (**i**, the 1st rubbing of AL22636 coated on CuPc. **ii**, spin coating and drying of F8BT layer and **iii**, rubbing the F8BT (2nd rubbing) with different direction from the 1st rubbing. **iv**, coating optical adhesion (NOA) on the rubbed F8BT and **v**, thermal annealing the sample at liquid crystalline temperature of the F8BT. **vi**, cooling down the sample and peeling off NOA and **vii**, TPBi/LiF/Al deposition in vacuum, sequentially. An AFM image and the corresponding Fourier transformed image show the 2nd rubbed surface of the F8BT. Here, scale bar represents 5 μm and arrows are indicating the rubbing directions). **b**, schematic diagram of the simultaneous emission with orthogonal handedness in circular polarization from single emitting layer. The multi-directionally rubbed AL22636 surface and the uni-directionally rubbed F8BT surface produce the reverse twisted structures. **c**, microscopic textures and **d**, PL textures under LH (top image) and RH (bottom image) circular polarizers. **e**, the CPEL spectra for the 1st (top spectra) and 2nd (bottom spectra) quadrants in the sample as in **c**. All spectra measured without a circular polarizer, and with LH and RH circular polarizers are presented by black (I_T), red (I_L), and blue (I_R) solid lines, respectively.

a, schematic diagrams of the fabrication process of the circular polarization-emitting device (i, the 1st rubbing of AL22636 coated on CuPc. ii, spin coating and drying of F8BT layer and iii, rubbing the F8BT (2nd rubbing) with different direction from the 1st rubbing. iv, coating optical adhesion (NOA) on the rubbed F8BT and v, thermal annealing the sample at liquid crystalline temperature of the F8BT. vi, cooling down the sample and peeling off NOA and vii, TPBi/LiF/Al deposition in vacuum, sequentially. An AFM image and the corresponding Fourier transformed image show the 2nd rubbed surface of the F8BT. Here, scale bar represents 5 μ m and arrows are indicating the rubbing directions). b, schematic diagram of the simultaneous emission with orthogonal handedness in circular polarization from single emitting layer. The multi-directionally rubbed AL22636 surface and the uni-directionally rubbed F8BT surface produce the reverse twisted structures. c, microscopic textures and d, PL textures under LH (top image) and RH (bottom image) circular polarizers. e, the CPEL spectra for the 1st (top spectra) and 2nd (bottom spectra) quadrants in the sample as in c. All spectra measured without a circular polarizer, and with LH and RH circular polarizers are presented by black (IT), red (IL), and blue (IR) solid lines, respectively. Credit: by Kyungmin Baek, Dong-Myung Lee, Yu-Jin Lee, Hyunchul Choi, Jeongdae Seo, Inbyeong Kang, Chang-Jae Yu, and Jae-Hoon Kim

Control of the polarization of light is a key feature for displays, optical data storage, optical quantum information, and chirality sensing. In particular, the direct emission of circularly polarized (CP) light has attracted great interest because of the enhanced performance of displays such as organic light-emitting diodes (OLEDs) and light sources for characterizing the secondary structure of proteins. To actually produce CP light, the luminescent layer should contain chiral characteristics, which can be achieved, for example, by decorating the luminophores with chiral materials or doping chiral molecules into achiral materials. However, such chirality of the luminescent layer makes it possible to

generate only one kind of CP light in an entire device since it is difficult to control the chiral sense spatially.

In a new paper published in *Light Science & Application*, scientists from Department of Electronic Engineering, Hanyang University, Republic of Korea demonstrated a simultaneously emitting device with orthogonal handedness in circular polarization from an achiral luminophore with a liquid crystalline (LC) phase. By rubbing alignments of luminophores in its upper and lower surfaces in different directions, the luminescent layer is continuously twisted and thus light passing through the luminescent layer emerges as right-handed (RH) or left-handed (LH) CP light without any chiral part. More interestingly, this twisting chiral sense is determined by the rubbing directions in its upper and lower surfaces. As a result, by generating multiple alignments in the lower surface of the achiral luminophore and unidirectional alignment in its upper surface, a light-emitting device with orthogonal handedness in [circular polarization](#) was implemented with a single achiral luminophore. This experimental demonstration highlights the feasibility of the light source with multi-polarization, including orthogonal CP states, thereby paving the way for novel applications in biosensors as well as optical devices such as OLEDs.

In a conventional OLED, since a circular polarizer in front of the OLED panel is inevitably required to prevent reflection of ambient light from a metal electrode, only half of the light extracted from the OLED panel reaches the eye. As a result, direct emission of CP light from an OLED with the same handedness as that of the circular polarizer in front of the OLED panel can increase the efficiency of the emitted light. Highly efficient OLED is implemented by directly generating a high degree of CP light, which is achieved from a twisted structure of the LC luminophore. The twisted sense of the LC luminophore was governed by producing the different boundary conditions in its upper and lower surfaces. In addition, the degree of CP light in the twisted luminophore

was theoretically calculated based on the Mueller matrix analysis and a CP light-emitting mechanism was confirmed. These scientists summarize the scientific achievement in their CP light-emitting device:

"For the first time, we demonstrated direct CP light emissions by using a twisted achiral conjugate polymer without any chiral component by introducing different boundary conditions in the upper and lower surfaces of the polymer. By patterning different alignment directions on one of its polymer surfaces, patterned CP light with various polarization states can be achieved through the fabricating process proposed herein. Also, the twisting limitation of the polymer by surface boundary conditions was systematically analyzed based on the [surface](#) anchoring energy model, and the degree of CP light was theoretically calculated based on the Mueller matrix analysis."

"The fabricating process and theoretical analysis proposed herein emphasizes the feasibility of the [light](#) source with multi-polarization, including orthogonal CP states, thereby paving the way towards novel applications in biosensors as well as optical devices such as OLEDs," the scientists forecast.

More information: Kyungmin Baek et al, Simultaneous emission of orthogonal handedness in circular polarization from a single luminophore, *Light: Science & Applications* (2019). [DOI: 10.1038/s41377-019-0232-0](#)

Provided by Chinese Academy of Sciences

Citation: Simultaneous emission of orthogonal handedness in circular polarization (2019, December 13) retrieved 27 June 2024 from <https://phys.org/news/2019-12-simultaneous-emission-orthogonal-handedness-circular.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.