


New technique increases 3-D printing speed by 1,000 to 10,000 times

December 20 2019

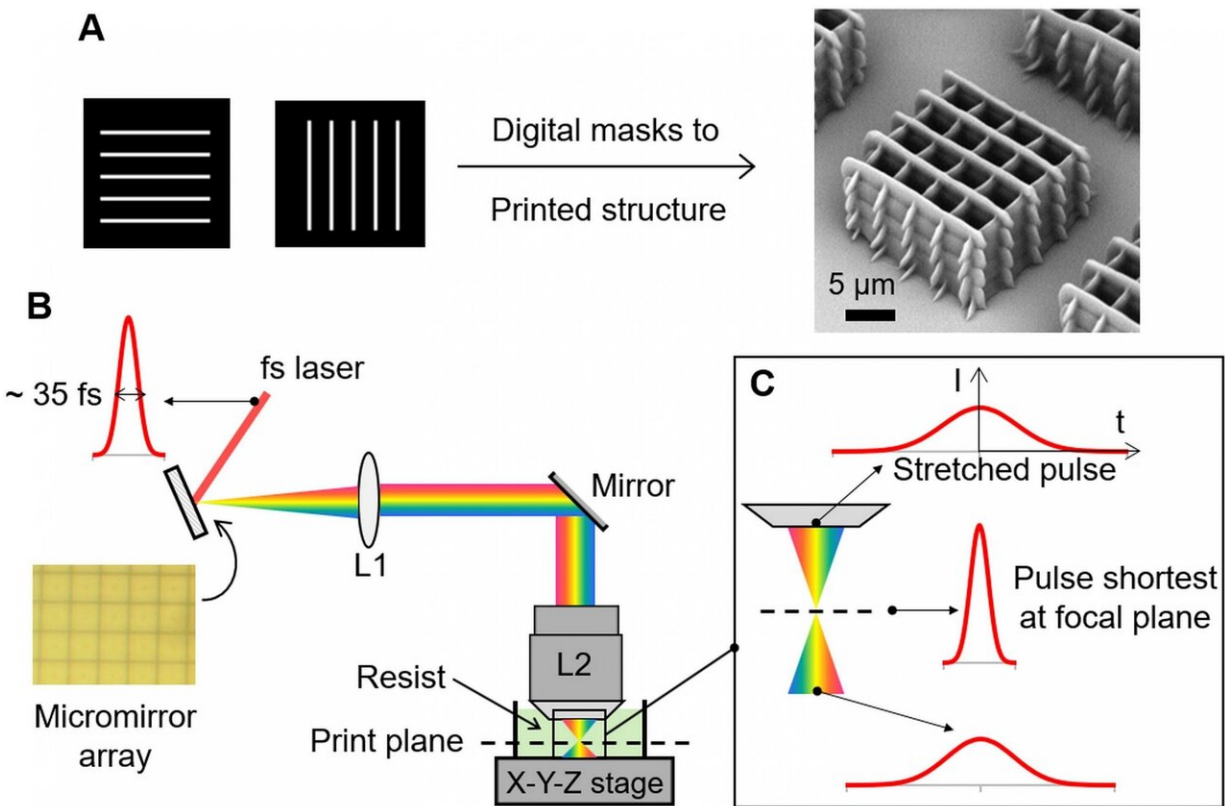

FP-TPL based on spatial and temporal focusing. Credit: CUHK

Ultraprecise 3-D printing technology is a key enabler for manufacturing precision biomedical and photonic devices. However, the existing printing technology is limited by its low efficiency and high cost.

Professor Shih-Chi Chen and his team from the Department of Mechanical and Automation Engineering, The Chinese University of Hong Kong (CUHK), collaborated with the Lawrence Livermore National Laboratory to develop the Femtosecond Projection Two-photon Lithography (FP-TPL) printing technology.

By controlling the [laser](#) spectrum via temporal focusing, the laser 3-D printing process is performed in a parallel layer-by-layer fashion instead of point-by-point writing. This new technique substantially increases the printing speed by 1,000—10,000 times, and reduces the cost by 98 percent. The achievement has recently been published in *Science*, affirming its technological breakthrough that leads nanoscale 3-D printing into a new era.

The conventional nanoscale 3-D [printing technology](#), i.e., two-photon polymerization (TPP), operates in a point-by-point scanning fashion. As such, even a centimeter-sized object can take several days to weeks to fabricate (build rate $\sim 0.1 \text{ mm}^3/\text{hour}$). The process is time-consuming and expensive, which prevents practical and industrial applications. To increase speed, the resolution of the finished product is often sacrificed. Professor Chen and his team have overcome the challenging problem by exploiting the concept of temporal focusing, where a programmable femtosecond light sheet is formed at the focal plane for parallel nanowriting; this is equivalent to simultaneously projecting millions of laser foci at the [focal plane](#), replacing the traditional method of focusing and scanning laser at one point only. In other words, the FP-TPL technology can fabricate a whole plane within the time that the point-scanning system fabricates a point.

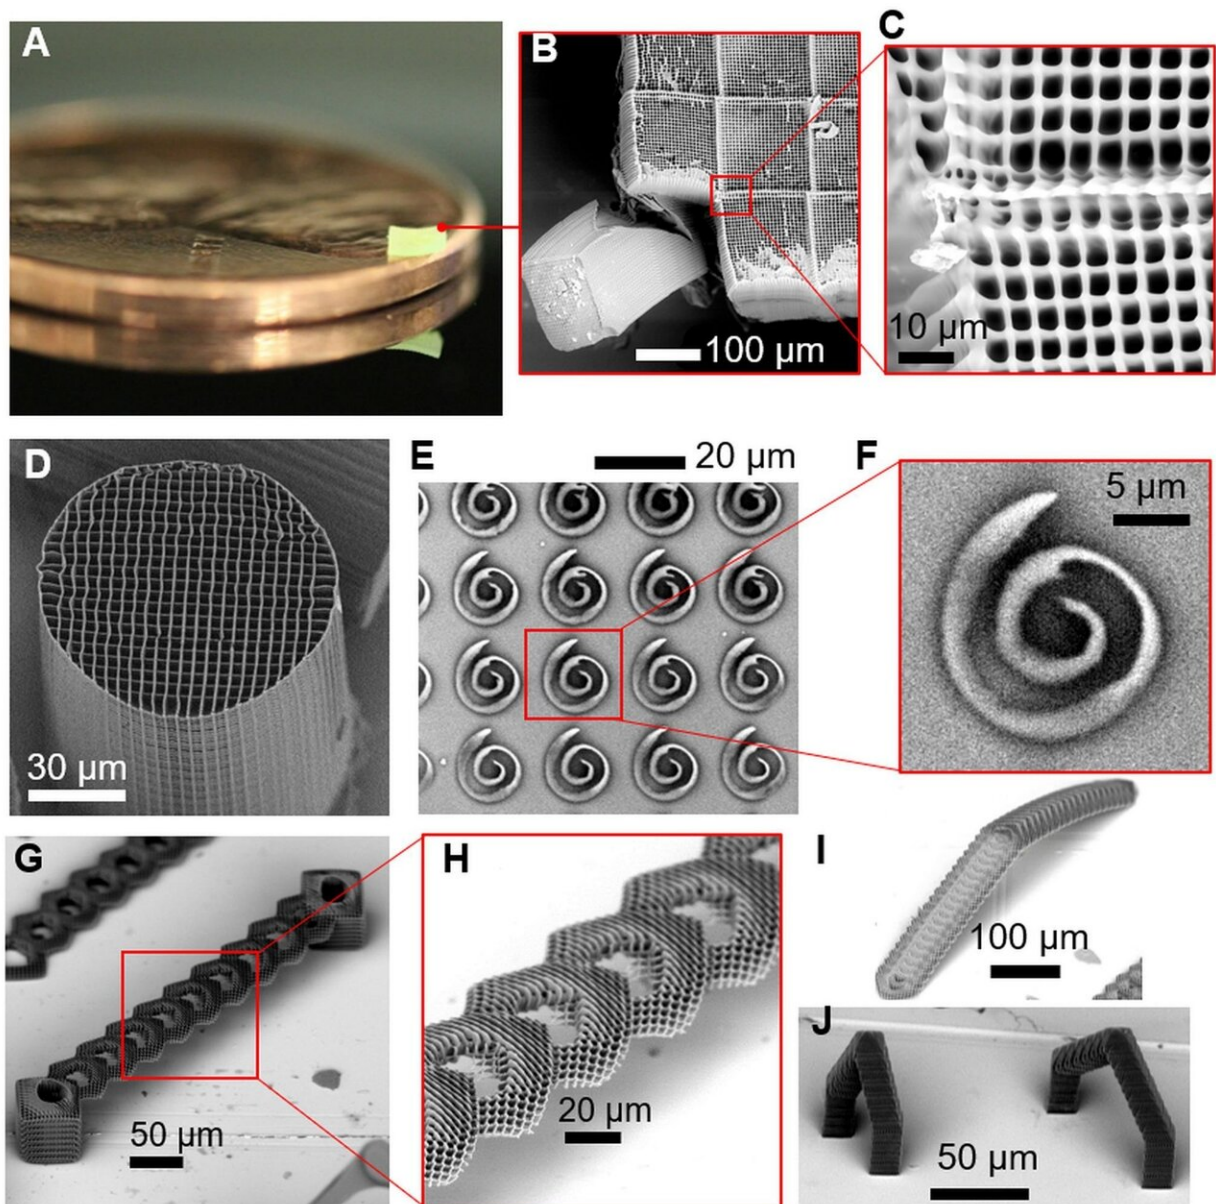


Fig. 1. Printing of complex 3D structures with submicron resolution via FP-TPL. (A to C) Millimeter-scale structure with submicrometer features supported on a U.S. penny on top of a reflective surface. The $2.20 \text{ mm} \times 2.20 \text{ mm} \times 0.25 \text{ mm}$ cuboid was printed in 8 min 20s, demonstrating a 3D printing rate of 8.7 mm^3/hour . In contrast, point-scanning techniques would require several hours to print this cuboid. (D) A 3D micropillar printed through stacking of 2D layers, demonstrating uniformity of printing that is indistinguishable from that of commercial serial-scanning systems. (E and F) Spiral structures printed through projection of a single layer demonstrating the ability to rapidly print curvilinear

structures within single-digit millisecond time scales without any stage motion. (G to J) Overhanging 3D structures printed by stitching multiple 2D projections demonstrating the ability to print depth-resolved features. The bridge structure in (G), with 90° overhang angles, is challenging to print using point-scanning TPL techniques or any other technique owing to its large overhang relative to the size of the smallest feature and the submicron feature resolution. Credit: The Chinese University of Hong Kong (CUHK)

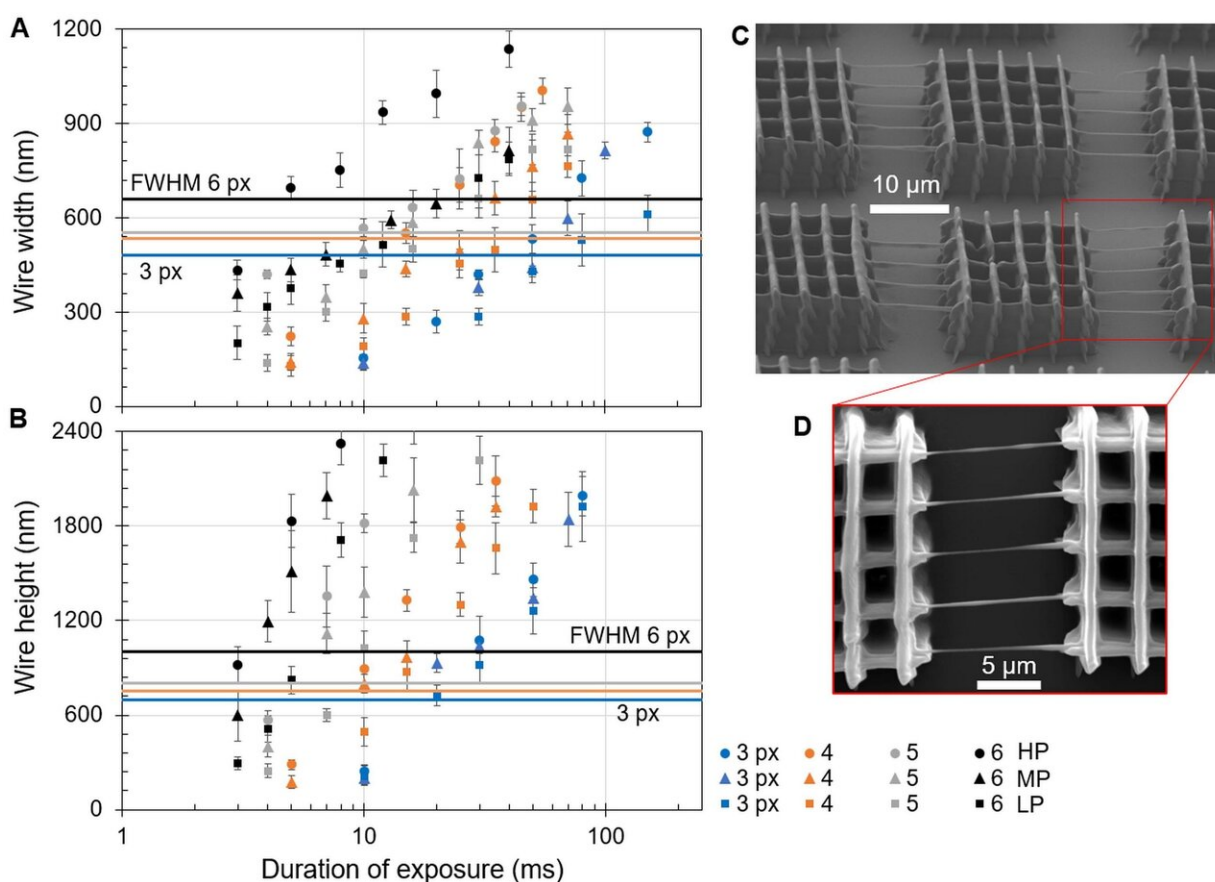


Fig. 2. Printed nanowires demonstrating nanoscale resolution of FP-TPL. (A) Width (along lateral direction) and (B) height (along axial direction) of suspended nanowires printed under different conditions. Width of lines in the projected DMD pattern was varied from 3 to 6 pixels with a fixed period of 30 pixels. Each pixel (px) maps to 151 nm in the projected image. Labels HP, MP, and LP refer to high (42 nW/px), medium (39 nW/px), and low (35 nW/px)

power levels, respectively. All markers of a specific shape represent data points generated at the same power level, and all markers of a specific colour represent the same line width. Printing was performed with a femtosecond laser that had a center wavelength of 800 nm and a nominal pulse width of 35 fs and with a 60×1.25 numerical aperture objective lens. (C and D) Scanning electron microscope images of the suspended nanowire features. Credit: The Chinese University of Hong Kong (CUHK)

What makes FP-TPL a disruptive technology is that it not only greatly improves the speed (approximately $10\text{--}100 \text{ mm}^3/\text{hour}$), but also improves the resolution ($\sim 140 \text{ nm} / 175 \text{ nm}$ in the lateral and axial directions) and reduces the cost ($\text{US}\$1.5/\text{mm}^3$). Professor Chen pointed out that typical hardware in a TPP system includes a femtosecond laser source and light scanning devices, e.g., digital micromirror device (DMD). Since the main cost of the TPP system is the laser source with a typical lifetime of $\sim 20,000$ hours, reducing the fabrication time from days to minutes can greatly extend the laser lifetime and indirectly reduce the average printing cost from $\text{US}\$88/\text{mm}^3$ to $\text{US}\$1.5/\text{mm}^3$ – a 98 percent reduction.

Due to the slow point-scanning process and lack of capability to print support structures, conventional TPP systems cannot fabricate large complex and overhanging structures. The FP-TPL technology has overcome this limitation by its high-[printing](#) speed, i.e., partially polymerized parts are rapidly joined before they can drift away in the liquid resin, which allows the fabrication of large-scale complex and overhanging structures, as shown in Figure 1 (G). Professor Chen said that the FP-TPL technology can benefit many fields; for example, nanotechnology, advanced functional materials, micro-robotics, and medical and drug delivery devices. Because of its significantly increased speed and reduced costs, the FP-TPL technology has the potential to be commercialized and widely adopted in various fields in the future,

fabricating meso- to large-scale devices.

Provided by The Chinese University of Hong Kong (CUHK)

Citation: New technique increases 3-D printing speed by 1,000 to 10,000 times (2019, December 20) retrieved 17 April 2024 from <https://phys.org/news/2019-12-technique-d.html>

This document is subject to copyright. Apart from any fair dealing for the purpose of private study or research, no part may be reproduced without the written permission. The content is provided for information purposes only.